

Esprit Pendant– Elegant Interior Spotlight Luminaire

kreon

Date: _____ Customer: _____

Project: _____

Type: _____ Qty: _____



kreon esprit is an elegant and simple spotlight luminaire that seeks to cast a perfect pool of light. LED light sources are contained within light projecting cylinders available as a ceiling mount, pendant and floor standing. Each provide a fully rotational and adjustable movement for the heads to enable total flexibility when directing light. The Esprit pendant is available in three different lengths and a choice of black or white finish. Remote positioned control gear is located above the ceiling void and can operate with single or twin headed models.

Construction

Luminaire

Made from high-pressure die cast aluminum. Surface treatment by powder-coated.

Finishes

- White
- Black

Mounting Option

- Pendant Mount
- Ceiling Mount (see other spec sheet)
- Floor Standing (see other spec sheet)

Classifications

- Ingress Protection – IP65

Electrical Characteristics

LED Specification

Cree LED.

LED Life

L70 greater than 60,000 hours.

Correlated Color Temperature (CCT)

- Available in 2700K
- CRI 80+ or CRI 90+



Gear

Standard 120V driver




Ordering Codes

KU__ -	__ -	__ -	80 -	__ -	__ -	INT -	__ -
KREON ESPRIT MOUNT	PENDANT LENGTH**	LIGHT SOURCE AND CCT*	CRI	FINISH COLOR*	LUMINAIRE HEADS	ELECTRIC GEAR**	OPTIONAL ACCESSORIES (USE ALL THAT APPLY, BLANK FOR NONE)
ESP – Pendant	16 – Length 1600 18 – Length 1800 24 – Length 2400	27 – 2700K 30 – 3000K	80 – 80+ min CRI 90 – 90+ min CRI	BLK – Black WH – White	03 – Double with Single (1600 or 1800 length only) 04 – Double with Double (1800 or 2400 length only)	INT – Integral 120V	OF2 – 700mA, ON/OFF 20W 10V – 700mA, 1-10V 20W DAL – 700mA, DALI
Ordering Example: KUESP-18-27-80-BLK-03-INT-10V							
* Consult factory for other options ** Consult factory for length options							

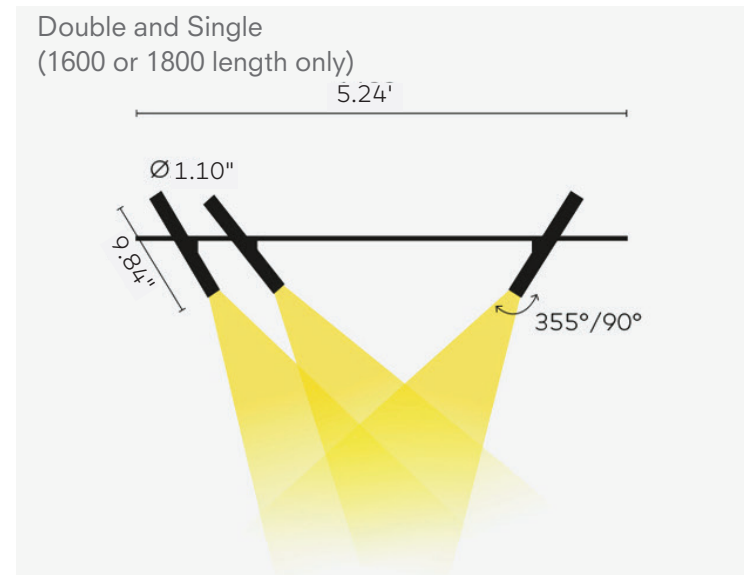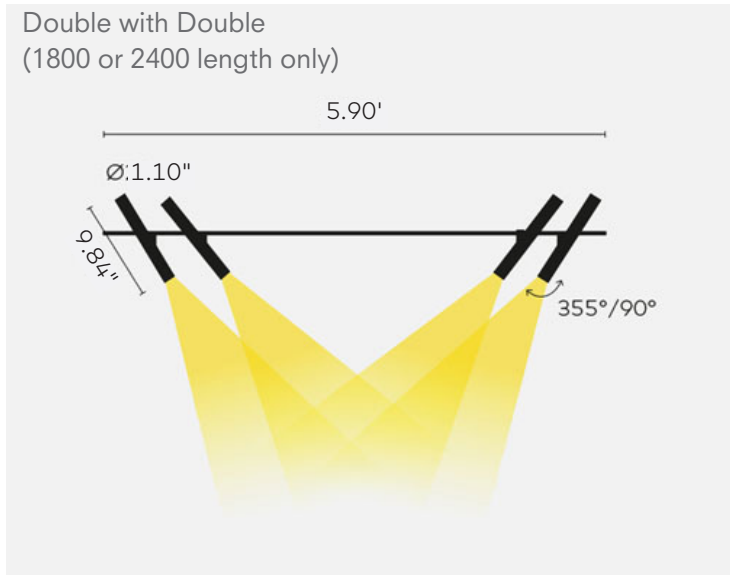

Accessories

Plasterkit



Light Output

	CRI	CCT	Wattage	Drive current	Fixture lumen
① LED	CRI80+	2700K	3x2W	700mA	483lm
	CRI90+	2700K	3x2W	700mA	387lm
② LED	CRI80+	2700K	4x2W	700mA	644lm
	CRI90+	2700K	4x2W	700mA	516lm