

# LEB19SC

19" ERA® LANTERN PICOEMITTER® LED

## FEATURES

- Full Cutoff PicoEmitter technology
- Available in 580nm, 3000K, 4000K and 5000K standard CCT
- Type 1, 2, 3, 4, 5, R & L distributions
- 0-10V dimming drivers standard
- Sealed optical chamber, IP66 certified


## CERTIFICATIONS



## SPECIFICATIONS



Approx. Weight = 54 lbs. EPA 1.0 for FM.  
See Configuration for Additional EPAs.



**Flush Mount**  
slips into a 3.375" Ø - 5" Ø open top pole or tenon with up to .25" profile thickness

**Post Top**  
slips over a 2 3/8" Ø pole or tenon with 4" of engagement

## ORDERING CODE

Configuration	EPA	Fixture	Electrical Module	Fixture Finish	Photocell Options
<ul style="list-style-type: none"> <li>• <b>FM</b> Flush Mount 1.0</li> <li>• <b>PT</b> Pipe Tenon Mt. 1.0</li> <li>• <b>1SA</b> 1 Arm Side Mt. 0.7</li> <li>• <b>2SB</b> 2 Arm Side Mt. 1.4</li> <li>• <b>3SY</b> 3 Arm Side Mt. 2.1</li> <li>• <b>4SC</b> 4 Arm Side Mt. 2.4</li> <li>• <b>1W</b> Single Wall Mt. n/a</li> </ul>		<b>LEB19SC</b> Lantern, Era Bottom Mnt. 19" Single Curved Arm <b>Distribution</b> 1 Type I 2 Type II 3 Type III 4 Type IV 5 Type V R Type R Right L Type L Left <b>Drive Current</b> E35 350mA PicoEmitter <b>Source</b> 60L 60 LEDs, 67W <b>Color Temperature<sup>1</sup></b> 2K 580nm <sup>2</sup> 3K 3000K 4K 4000K 5K 5000K <b>Voltagess</b> UV 120-277V 120 120V 208 208V 240 240V 277 277V 347 <sup>3</sup> 347V 480 <sup>3</sup> 480V	<b>BLS</b> Black Gloss Smooth <b>BLT</b> Black Matte Textured <b>DBS</b> Dark Bronze Gloss Smooth <b>DBT</b> Dark Bronze Matte Textured <b>GTT</b> Graphite Matte Textured <b>LGS</b> Light Grey Gloss Smooth <b>LGT</b> Light Grey Matte Textured <b>PSS</b> Platinum Silver Gloss Smooth <b>VGT</b> Verde Green Matte Textured <b>WHS</b> White Gloss Smooth <b>WHT</b> White Matte Textured <b>CC *</b> Custom Color * Consult Representative	<b>A25-7</b> 7-pin Photocell Receptacle <b>A30</b> 120V Button Photocell <b>A31</b> 208V Button Photocell <b>A32</b> 240V Button Photocell <b>A33</b> 277V Button Photocell <b>A34</b> 480V Button Photocell <b>A35</b> 347V Button Photocell	

NOTE: EPA is for Fixture only

Fuse Options	NFO Option	Control Options	Arm Options	Mounting Options		
<b>SF</b> 120, 277, 347 Line Volts <b>DF</b> 208, 240, 480 Line Volts	<b>NFO</b> Neighbor Friendly Optic. Photometry available for Type III/IV. All others, consult factory.	<b>Wireless</b> <b>WIR-RMI-IO</b> 120-480V, 1000' range, wiS-CAPE RF control system with on/off/dim, alerts, monitoring and metering capabilities <b>Motion</b> <b>SCH-R</b> Round Pole Mounted Occupancy Sensor up to 30' <b>SCH-S</b> Square Pole Mounted Occupancy Sensor up to 30'	<b>Pole Arm</b> <b>HA11S</b> <b>HA12S</b> <b>HA14S</b> <b>Arm Finial</b> <b>HAF02</b>	<b>Pole Tenon Mount</b> <b>HA11S-TM1, HA11S-TM2, HA11S-TM3, HA11S-TM4</b> <b>HA12S-TM1, HA12S-TM2, HA12S-TM3, HA12S-TM4</b> <b>HA14S-TM1, HA14S-TM2, HA14S-TM3, HA14S-TM4</b> <b>Finial</b> <b>TF</b>	<b>Wall Mount</b> <b>HA11S-W</b> <b>HA12S-W</b> <b>HA14S-W</b> <b>Style</b> Side Pole Swept Cast Arm Side Pole S-Shaped Up Cast Arm Side Pole Neo-Classic Arm	<b>Side Arm Mount</b> <b>3</b> 3" O.D. Pole <b>3.5</b> 3.5" O.D. Pole <b>4</b> 4" O.D. Pole <b>5</b> 5" O.D. Pole <b>6</b> 6" O.D. Pole <b>SQ</b> Square Pole










<sup>1</sup> For custom optics and color temperature configurations, contact factory.  
<sup>2</sup> Turtle friendly. Maximum 500mA drive current for 2K amber option.  
<sup>3</sup> 347V & 480V currents may be supplied with step-down transformer.

# LEB19SC

19" ERA® LANTERN PICOEMITTER® LED

## ARM OPTIONS

**Note:** Refer to Kim Lighting's Arms and Poles Specification Guide for EPA information and additional information on arm, tenon and wall mounting.  
**1W** Wall Mount arm is not included and must be ordered separately.

Side Pole Swept Cast Arm				Side Pole S-Shaped Up Cast Arm				Side Pole S-Shaped Down Cast Arm			
ARM	Tenon Mount	Wall Mt		ARM	Tenon Mount	Wall Mt		ARM	Tenon Mount	Wall Mt	
											
<b>HA11S</b>	<b>HA11S-TM1</b> <b>HA11S-TM2</b> <b>HA11S-TM3</b> <b>HA11S-TM4</b>	<b>HA11S-W</b>		<b>HA12S</b>	<b>HA12S-TM1</b> <b>HA12S-TM2</b> <b>HA12S-TM3</b> <b>HA12S-TM4</b>	<b>HA12S-W</b>		<b>HA13S</b>	<b>HA13S-TM1</b> <b>HA13S-TM2</b> <b>HA13S-TM3</b> <b>HA13S-TM4</b>	<b>HA13S-W</b>	
Mounting:	1A 2B	3Y 4C		Mounting:	1A 2B	3Y 4C		Mounting:	1A 2B	3Y 4C	


## Arm Finial

**HAF02** Traditional style finial available to close off mounting hub opposite fixture.



## Finial

**TF** Heavy cast aluminum finial on top of lantern housing. For use with Bottom Mount (BM) luminaire only.



# LEB19SC

19" ERA® LANTERN PICOEMITTER® LED

## LUMINAIRE PERFORMANCE

Spectroradiometric			
	3000K Average	4000K Average	5000K Average
Color Rendering Index (CRI)	≤80	≤80	≤70
Power Factor	>.90	>.90	>.90

Projected Lumen Maintenance		
mA	100,000 hrs	(Calculated L70)
350 mA	93.33%	596,000 hrs.

Electrical Drive Current		
Volts - AC	Amps - AC	System Watts
120	0.56	67
208	0.32	67
240	0.28	67
277	0.24	67
347	0.19	67
480	0.14	67

B.U.G. Rating (TM15) in Lumens wher B = Backlight, U = Uplight, G = Glare								
Temperature	TYPE 1	TYPE 2	TYPE 3	TYPE 3 NFO	TYPE 4	TYPE 4 NFO	TYPE 5	TYPE L/R
3000K	TBD	B1 U0 G1	B1 U0 G1	N/A	B1 U0 G1	B0 U0 G1	B2 U0 G1	TBD
4000K	TBD	B2 U0 G2	B1 U0 G1	N/A	B1 U0 G1	B1 U0 G1	B2 U0 G1	TBD
5000K	TBD	B2 U0 G2	B1 U0 G1	N/A	B1 U0 G1	B1 U0 G1	B3 U0 G1	TBD

Absolute Lumens								
Temperature	TYPE 1	TYPE 2	TYPE 3	TYPE 3 NFO	TYPE 4	TYPE 4 NFO	TYPE 5	TYPE L/R
3000K	TBD	5471	5187	4216	5165	4346	5427	TBD
4000K	TBD	5611	5320	4324	5298	4457	5566	TBD
5000K	TBD	5675	5381	4373	5358	4508	5630	TBD

LED performance and lumen output continues to improve at a rapid pace. For custom optics and color temperature configurations, contact factory. \*Data is prorated from 5000K IES files.

# LEB19SC

19" ERA® LANTERN PICOEMITTER® LED

## SPECIFICATIONS

### Housing:

- One-piece die-cast, low copper (<0.6% Cu) aluminum alloy with integral cooling ribs over the optical chamber and electrical compartment.
- Solid barrier wall separates optical and electrical compartments.
- Double-thick wall with gussets on the support-arm mounting end.
- Housing forms a half cylinder with 55° front face plane providing a recess to allow a flush single-latch detail.
- All hardware is stainless steel or electro-zinc plated steel.

### Lens Frame:

- One-piece die-cast, low copper (<0.6% Cu) aluminum alloy lens frame with 1" minimum depth around the gasket flange.
- Integral hinges with stainless steel pins provide no-tool mounting and removal from housing.
- Single die-cast aluminum cam-latch provides positive locking and sealing of the optical chamber by a one-piece extruded and vulcanized silicone gasket to provide an IP66 rating for the optical module.
- Clear 3/8" thick tempered glass lens retained by eight steel clips with full silicone gasketing around the perimeter.

### Neighbor Friendly Optic

- Integrated Neighbor Friendly Optic on each PicoEmitter module to completely control unwanted backlight. Most effective with Type III and IV distributions.

### Lens:

- One-piece clear tempered glass lens sealed with silicone gasket.

### Optical Module:

- Precision, replaceable PicoEmitters are positioned to achieve directional control toward desired task.
- The entire EmitterDeck fastens to the housing as a one-piece module.
- Type I, II, III, IV, V, L (left), and R (right) standard distributions. Custom available.
- 3000K, 4000K, 5000K standard CCT. Amber and custom available.
- IP66 certified

- Die-cast, low copper aluminum heat sink modules provide thermal transfer at PCB level.
- Anodized aluminum carrier plate and heat sink modules.


### Electrical Characteristics:

- 120V through 480V @ 50/60Hz.
- Class 1, 350mA.
- Power Factor = >.90
- National Electrical Code, ANSI/NFPA 70.
- 10kV surge suppression.
- Thermalshield thermal control.
- -40c starting driver.
- 0-10V dimming interface.
- All electronic components are IP66 rated.
- Electronic components are UL and/or CSA recognized.

### Dimming:

- 10% to 100% dimming using standard 0-10V interface driver.
- To activate the dimming system, a wiring harness is supplied and attached to the DIM Port (DIM IN) on the thermal shield protection system. This port allows the 0-10V Interface to bypass the thermal shield and control the driver.
- The thermal shield works in conjunction with the control system to assure that overheating will not harm the LEDs.

The wiring harness is connected with the use of the Purple lead as the positive (+) and the Pink lead as the negative (-) to an available control signal (by others).



### Support Arm:

- One-piece extruded aluminum with internal bolt guides and fully radiussed top and bottom.
- Luminaire-to-pole attachment is by internal draw bolts, and includes a pole reinforcing plate with wire strain relief.
- Arm is circular cut for specified round pole.

- Optional cast, low copper aluminum horizontal slip-fitter with adaptor plate to secure the luminaire to 2" IPS pipe size arms.
- Optional cast aluminum wall mount plate assembly. Attaches to the wall over the junction box. Luminaire attaches to the wall plate.

### Finish:

- Fade and abrasion resistant, electrostatically applied, thermally cured, triglycidal isocyanurate (TGIC) polyester powdercoat.
- Standard colors include (BLS) Black Gloss Smooth, (BLT) Black Matte Textured, (DBS) Dark Bronze Gloss Smooth, (DBT) Dark Bronze Matte Textured, (GTT) Graphite Matte Textured, (LGS) Light Gray Gloss Smooth, (LGt) Light Gray Matte Textured, (PS) Platinum Silver, (VGS) Verde Green Matte Textured, (WHS) White Gloss Smooth, (WHT) White Matte Textured, and (CC) Custom Color (Include RAL#).

### Fusing:

**SF** for 120, 277 and 347 Line Volts  
**DF** for 208, 240 and 480 Line Volts.

- High temperature fuse holders factory installed inside the fixture housing. Fuse is included.

### Certifications and Listings:

- UL 1598 Standard for wet locations for Luminaires.
- UL 8750 Standard for Safety for Light Emitting Diode (LED) Equipment for use in Lighting Products.
- IP66 certified.
- CSA C22.2#250.0 Luminaires.
- ANSI C136.31-2010 3G Vibration tested and compliant.
- RoHS compliant.
- IDA approved, 3000K and warmer CCTs only.

### CAUTION:

- Fixtures must be grounded in accordance with national, state and/or local electrical codes, Failure to do so may result in serious personal injury.

# LEB19SC

19" ERA® LANTERN PICOEMITTER® LED

## CONTROLS


### Photocell Receptacle

#### A25-7

Fully gasketed and wired 7-pin receptacle option. Easy access location above the electrical compartment. 7-pin construction allows for a user-defined interface and provides a controlled definition of operational performance. ANSI twist-lock control module by-others.

Standard customer operation modes:

1. Traditional on/off photoelectric control.
2. 5-pin wireless photoelectric control for added dimming feature.
3. 7-pin wireless photoelectric control for dimming and additional I/O connections for customer use.

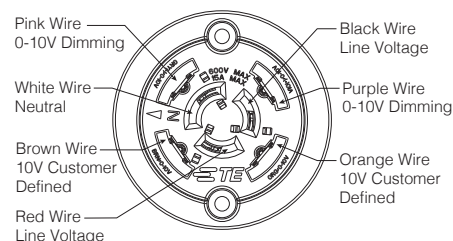

### Button Photocell

**A30** for 120V, **A31** for 208V, **A32** for 240V, **A33** for 277V, **A35** for 347V, **A34** for 480V,

Photocell is factory installed inside the housing with a fully gasketed sensor on the side wall. For multiple fixture mountings, one fixture is supplied with a photocell to operate the others.

### Wireless Control

wiSCAPE™ In-Fixture Module is a bi-directional wireless RF device that allows an individual fixture to be managed, monitored and metered. The wiSCAPE In-Fixture Module communicates wirelessly over a robust 2.4GHz ISM (Industrial, Scientific and Medical) certified meshed radio signal. The wiSCAPE Fixture Module drastically simplifies control and automation of projects, especially in retrofit environments, and challenges the legacy world of wired-systems. wiSCAPE wireless control technology easily adapts to complex automation situations for quick, simple and economical commissioning. The On-Fixture Module is compatible with A-25-7H option.

### WIR-RMI-IO

120 - 347V 1000 Foot Range WiScape RF mesh control system with off/on/dim, motion, photo, GPS location, alert, monitoring and metering capabilities.

### Pole Mounted

#### Round Pole-Mounted Occupancy Sensor up to 30'

##### SCH-R

Round Pole-Mounted Occupancy Sensor: up to 30' - an outdoor occupancy sensor with 0-10V interface dimming control that mounts directly to the pole. Wide 360° pattern. Module colors are available in Black, Gray, and White. Module is cut for round pole mounting. Pole diameter is needed upon order. Poles to be drilled in the field will be provided with installation instructions.

Ordering Example: SCH-R4<sup>1</sup>/277<sup>2</sup>/BL<sup>3</sup>

#### Square Pole-Mounted Occupancy Sensor up to 30'

##### SCH-S

Square Pole-Mounted Occupancy Sensor: up to 30' - an outdoor occupancy sensor with 0-10V interface dimming control that mounts directly to the pole. Wide 360° pattern. Module colors are available in Black, Gray, and White. Module is cut for round pole mounting. Pole diameter is needed upon order. Poles to be drilled in the field will be provided with installation instructions.

Ordering Example: SCH-S/277<sup>2</sup>/BL<sup>3</sup>

### SCP

The SCP is a photo-control with motion sensing accessory that mounts to the side of any new or existing 3"-5" round or square straight pole. The SCP enables any pole mounted luminaire in excess of 75 watts, to meet California Title 24 requirements with integral 20KV/10KA surge protection for added reliability and serviceability.

<sup>1</sup>Pole Diameter, <sup>2</sup>Voltage, <sup>3</sup>Color

Kim Lighting reserves the right to change specifications without notice.