




USM-10701


Smith Square Bollard



38w LED 4234 Lumens
IP65 • Suitable For Wet Locations
IK08 • Impact Resistant (Vandal Resistant)
Weight 21.1 lbs

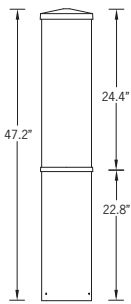

Mounting Detail

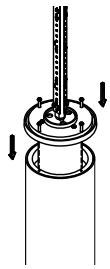

Standard Internal Waterproof Driver Housing

Construction

Aluminum
 Less than 0.1% copper content – Marine Grade 6060 extruded & LM6 Aluminum High Pressure die casting provides excellent mechanical strength, clean detailed product lines and excellent heat dissipation.

Pre paint
 8 step degrease and phosphate process that includes deoxidizing and etching as well as a zinc and nickel phosphate process before product painting.

Memory Retentive -Silicon Gasket
 Provided with special injection molded "fit for purpose" long life high temperature memory retentive silicon gaskets. Maintains the gaskets exact profile and seal over years of use and compression.

Thermal management
 LM6 Aluminum is used for its excellent mechanical strength and thermal dissipation properties in low and high ambient temperatures. The superior thermal heat sink design by Ligman used in conjunction with the driver, controls thermals below critical temperature range to ensure maximum luminous flux output, as well as providing long LED service life and ensuring less than 10% lumen depreciation at 50,000 hours.

Surge Suppression
 Standard 10kv surge suppressor provided with all fixtures.

BUG Rating
 Contact Factory

Finishing
 All Ligman products go through an extensive finishing process that includes fettling to improve paint adherence.

Paint
 UV Stabilized 4.9Mil thick powder coat paint and baked at 200 Deg C. This process ensures that Ligman products can withstand harsh environments. Rated for use in natatoriums.

Inspired by Nature Finishes
 The Inspired by nature Finishing is a unique system of decorative powder coating. Our metal decoration process can easily transform the appearance of metal or aluminum product into a wood grain finish.

This patented technology enables the simulation of wood grain, and even marble or granite finish through the use of decorative powder coating.

The wood grain finish is so realistic that it's almost undistinguishable from real wood, even from a close visual inspection. The system of coating permeates the entire thickness of the coat and as a result, the coating cannot be removed by normal rubbing, chipping, or scratching.

The Coating Process
 After pre-treatment the prepared parts are powder coated with a specially formulated polyurethane powder. This powder provides protection against wear, abrasion, impact and corrosion and acts as the relief base color for the finalized metal decoration.

The component is then wrapped with a sheet of non-porous film with the selected decoration pattern printed on it using special high temperature inks.

This printed film transfer is vacuum-sealed to the surface for a complete thermo print and then transferred into a customized oven. The oven transforms the ink into different forms within the paint layer before it becomes solid. Finally, the film is removed, and a vivid timber look on aluminum remains.

Wood grain coating can create beautiful wood-looking products of any sort. There are over 300 combinations of designs currently in use. Wood grains can be made with different colors, designs, etc.

Our powder coatings are certified for indoor and outdoor applications and are backed by a comprehensive warranty. These coatings rise to the highest conceivable standard of performance excellence and design innovation.

- Added Benefits**
- Resistance to salt-acid rain, accelerated aging
 - Boiling water, lime and condensed water resistant
 - Anti-Graffiti, Anti-Slip, Anti-Microbial, Anti-Scratch
 - Super durable (UV resistant)
 - TGIC free (non-toxic)

Hardware
 Provided Hardware is Marine grade 316 Stainless steel.

Anti Seize Screw Holes
 Tapped holes are infused with a special anti seize compound designed to prevent seizure of threaded connections, due to electrolysis from heat, corrosive atmospheres and moisture.

High Impact Acrylic Lens
 Manufactured with Ultra High Impact, Naturally UV Stabilized Extruded Acrylic.

Optics & LED
 Precise optic design provides exceptional light control and precise distribution of light.
 LED CRI > 80

Lumen - Maintenance Life
 L80 /B10 at 50,000 hours (This means that at least 90% of the LED still achieve 80% of their original flux)


Straight and clean square bollard.
Smooth lines complimented with a smooth lighting effect from the opal vertical diffuser.

Smith is an elegant bollard that is suitable for both modern and classic architecture. Ideal for creating visual guidance with exceptional visual comfort. A sleek and minimalist shape provides distinctive lighting effects by night and decorative urban effect during the day. Suitable for pedestrian precincts, building surrounds, shopping centers, squares and parks. The luminaire is provided with a ultra high impact UV stabilized acrylic lens that provides excellent low glare vertical and illumination.

The Smith Bollard comes standard with a unique waterproof internal driver housing compartment that is situated at the top of the pole to stop water and dust from entering the electrical components. This fixture is supplied completely wired with powercord and waterproof gland from the driver enclosure to the base of the bollard ensuring quick trouble-free installation. Custom bollard heights are available, please specify. Color temperature 2700K, 3000K, 3500K and 4000K. Custom wattages can be provided to suit customer and Title 24 requirements. (Specify total watts per fixture)

NOTE: This product is available with integrated occupancy sensor detection, please see page 2 for more information.

Additional Options (Consult Factory For Pricing)

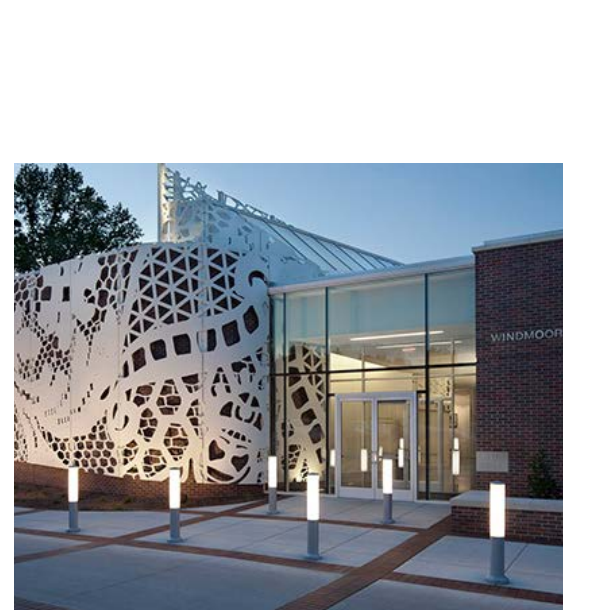

USM-10701


Smith Square Bollard

| | | | |
|----------------|--|-------------|--|
| PROJECT | | DATE | |
|----------------|--|-------------|--|


| | | | | | |
|-----------------|--|-------------|--|-------------|--|
| QUANTITY | | TYPE | | NOTE | |
|-----------------|--|-------------|--|-------------|--|

ORDERING EXAMPLE || USM - 10701 - 38w - W30 - 02 - 120/277v - Options

OCCUPANCY SENSOR OPTIONS

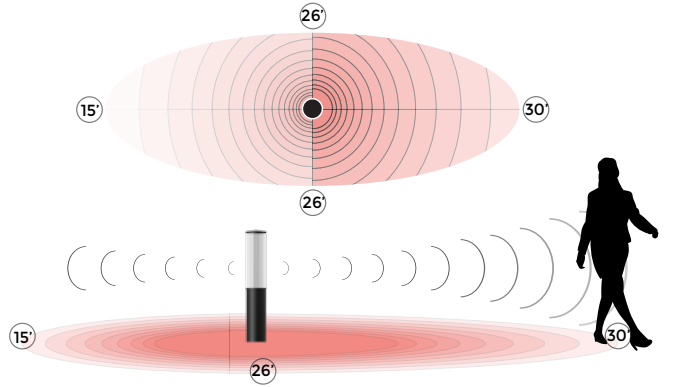

OCC1
SINGLE OCCUPANCY SENSOR DETECTION RANGE
[UNIVERSAL LEFT OR RIGHT DETECTION]

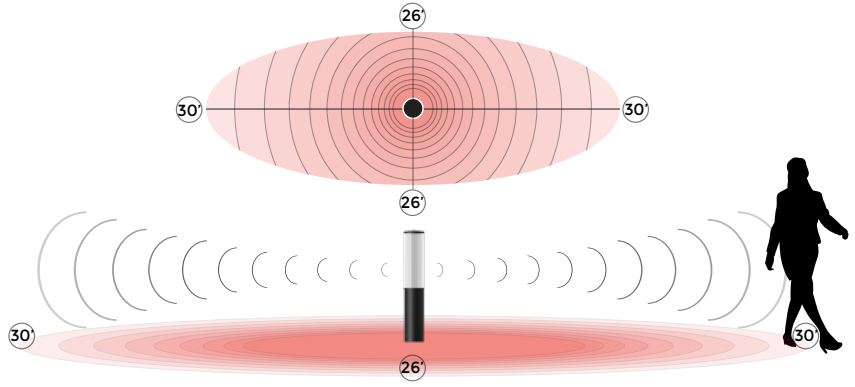

OCC2
DUAL OCCUPANCY SENSOR DETECTION RANGE

* The integrated, smart occupancy sensor can be programmed on site to function in a variety of ways.

Example: Simple on-off mode || DIM -> full light output on detection -> DIM | Off -> full bright on detection -> DIM for a set time with no detection -> off | DIM -> full bright on detection -> DIM

| | | | |
|------------------|------------------|---------------------|----------------|
| USM-10701 | | | |
| LAMP | LED COLOR | FINISH COLOR | VOLTAGE |

38w LED
4234 Lumens

W27 - 2700K
W30 - 3000K
W35 - 3500K
W40 - 4000K

- 01 - BLACK RAL 9011
- 02 - DARK GREY RAL 7043
- 03 - WHITE RAL 9003
- 04 - METALLIC SILVER RAL 9006
- 05 - MATTE SILVER RAL 9006
- 06 - LIGMAN BRONZE
- 07 - CUSTOM RAL



120/277v
Other - Specify

| | | |
|--|--|--|
| | | |
|--|--|--|

ADDITIONAL OPTIONS

- | | |
|--|---|
| <ul style="list-style-type: none"> NAT - Natatorium Rated DIM - 0-10v Dimming HGT - Custom Bollard Height [Specify HGT=XX"] A12891 - Security Bollard (12" Lens Only) A12891-K4 - Rated Security Bollard (12" Lens Only) A91591 - Lockable GFCI Box (Bollard Height 60") | <ul style="list-style-type: none"> PS - Perforated Shield UL - Unlit Bollard GFCI - GFCI Box OCC1 - Single Occupancy Sensor OCC2 - Dual Occupancy Sensor |
|--|---|

- INSPIRED BY NATURE FINISHES**
- SW01 - OAK FINISH
 - SW02 - WALNUT FINISH
 - SW03 - PINE FINISH
 - DF - DOUGLAS FIR FINISH
 - CW - CHERRY WOOD FINISH
 - NW - NATIONAL WALNUT FINISH
 - SU01 - CONCRETE FINISH
 - SU02 - SOFTSCAPE FINISH
 - SU03 - STONE FINISH
 - SU04 - CORTEN FINISH

THERE IS AN ADDITIONAL COST FOR THESE FINISHES

Bollard occupancy sensor settings

Please specify factory setting requirements

DIP Switch Settings (HC403VRC-KD)

1 Detection Range

Sensor sensitivity can be adjusted by selecting the combination on the DIP switches to fit precisely for each specific application.

| | 1 | 2 | |
|------------------------------|---|---|------|
| <input type="checkbox"/> I | ● | ● | 100% |
| <input type="checkbox"/> II | ● | ○ | 75% |
| <input type="checkbox"/> III | ○ | ● | 50% |
| <input type="checkbox"/> IV | ○ | ○ | 10% |

I – 100%
 II – 75%
 III – 50%
 IV – 10%

2 Hold-time

Select the dip switch configuration for the full brightness on-time after presence detection.

Please note that this function is disabled when the natural daylight exceeds the daylight threshold setting for more than 5 minutes.

| | 1 | 2 | 3 | |
|------------------------------|---|---|---|-------|
| <input type="checkbox"/> I | ● | ● | ● | 5s |
| <input type="checkbox"/> II | ● | ● | ○ | 30s |
| <input type="checkbox"/> III | ● | ○ | ● | 1min |
| <input type="checkbox"/> IV | ● | ○ | ○ | 5min |
| <input type="checkbox"/> V | ○ | ● | ● | 10min |
| <input type="checkbox"/> VI | ○ | ● | ○ | 20min |
| <input type="checkbox"/> VII | ○ | ○ | ○ | 30min |

I – 5s
 II – 30s
 III – 1min
 IV – 5min
 V – 10min
 VI – 20min
 VII – 30min

3 Daylight Threshold

Set the level according to the fixture and environment. The light will not turn on if ambient lux level exceeds the daylight threshold preset.

Please note that the ambient lux level refers to internal light reaching the sensor.

Disabling the daylight sensor will put the sensor into occupancy detection only mode.

| | 1 | 2 | |
|------------------------------|---|---|---------|
| <input type="checkbox"/> I | ● | ● | Disable |
| <input type="checkbox"/> II | ● | ○ | 5.0fc |
| <input type="checkbox"/> III | ○ | ● | 1.0fc |
| <input type="checkbox"/> IV | ○ | ○ | 0.2fc |

I – Disable
 II – 5.0fc
 III – 1.0fc
 IV – 0.2fc

4 Stand-by period (corridor function)

This is the time period you would like to keep at the low light output level before it is completely switched off in the long absence of people.

Note: "0s" means on/off control;

"+ ∞" means the stand-by time is infinite and the fixture never switches off.

| | 1 | 2 | 3 | |
|-------------------------------|---|---|---|-------|
| <input type="checkbox"/> I | ● | ● | ● | 0s |
| <input type="checkbox"/> II | ● | ● | ○ | 10s |
| <input type="checkbox"/> III | ● | ○ | ● | 1min |
| <input type="checkbox"/> IV | ● | ○ | ○ | 5min |
| <input type="checkbox"/> V | ○ | ● | ● | 10min |
| <input type="checkbox"/> VI | ○ | ● | ○ | 30min |
| <input type="checkbox"/> VII | ○ | ○ | ● | 1H |
| <input type="checkbox"/> VIII | ○ | ○ | ○ | +∞ |


I – 0s
 II – 10s
 III – 1min
 IV – 5min
 V – 10min
 VI – 30min
 VII – 1H
 VIII – +∞

5 Stand-by dimming level

The setting is used to select the desired dimmed light level used in periods of absence for enhanced comfort and safety.

| | 1 | 2 | |
|------------------------------|---|---|-----|
| <input type="checkbox"/> I | ● | ● | 10% |
| <input type="checkbox"/> II | ● | ○ | 20% |
| <input type="checkbox"/> III | ○ | ● | 30% |
| <input type="checkbox"/> IV | ○ | ○ | 50% |

I – 10%
 II – 20%
 III – 30%
 IV – 50%

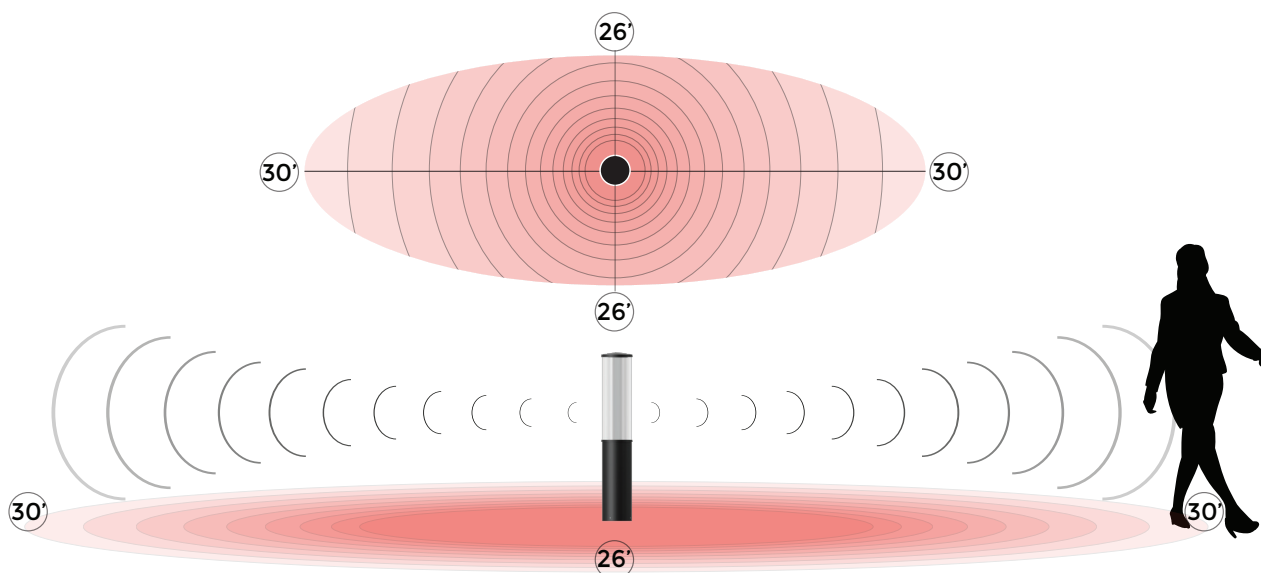

Smith Product Family

