

IP65 : Suitable for Wet Locations
 IK10 : Impact Resistant (Vandal Resistant)



UTA-80411 Tango 15 square surface exterior downlight LED

A range of cylindrical surface mounted exterior downlight luminaires. Developed for interior and exterior lighting using a variety of different lamp options. These include compact fluorescent lamps, and discharge lamps. Low copper content die-cast aluminum housing and aluminum bottom frame with integral anti-glare baffles. Stainless steel screws. Durable silicone rubber gasket and clear toughened glass. Single cable entry. Housing is treated with a chemical chroma-tized protection before powder coating, ensuring high corrosion resistance. Integral control gear. Anodized high purity aluminum reflector.

Physical Data

Length: 6.3"
 Height: 10.47"
 Weight: 8.6 lbs

Lamp

- 30w - 2075lm - White - LED ☺
- 20w - 1325lm - White - LED ☺

Beam Angle (Please Specify)

- N - Narrow Beam: 14 Deg
- M - Medium Beam: 24 Deg
- W - Wide Beam: 40 Deg

LED Color (Please Specify)

- W27 - 2700K
- W30 - 3000K
- W40 - 4000K

Voltage (Please Specify)

- 120V
- 277V
- Other _____


Color (Please Specify)

- 01-Black - RAL 9011
- 02- Dark Grey - RAL 7043
- 03-White - RAL 9003
- 04 - Metallic Silver - RAL 9006
- 05-Matt Silver - RAL 9006
- 06-Bronze - RAL 6014
- 07- Custom - RAL _____



Lens



- F - Frosted Lens
- C - Clear Lens




- SCE - Surface Conduit Entry Box - 1/2" Conduit 3/4" Conduit

- Mounting Ring

- HGT - Specify Custom Height _____ ft

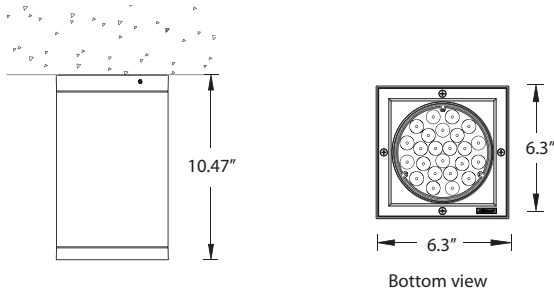

Bottom view



Mounting detail

Ordering Example : UTA - 80411 - White-30w - N - W30 - 120v - Options

PROJECT: _____ DATE: _____

TYPE: _____ QUANTITY: _____ NOTE: _____

Ligman Lighting USA reserves the right to change specifications without prior notice, please contact factory for latest information. Due to the continual improvements in LED technology data and components may change without notice.