

URO-80477

Robust 1 Round Asymmetrical Ceiling Downlight



Construction

Aluminum

Less than 0.1% copper content – Marine Grade 6060 extruded & LM6 Aluminum High Pressure die casting provides excellent mechanical strength, clean detailed product lines and excellent heat dissipation.

Pre paint

8 step degrease and phosphate process that includes deoxidizing and etching as well as a zinc and nickel phosphate process before product painting.

Memory Retentive -Silicon Gasket

Provided with special injection molded “fit for purpose” long life high temperature memory retentive silicon gaskets. Maintains the gaskets exact profile and seal over years of use and compression.

Thermal management

LM6 Aluminum is used for its excellent mechanical strength and thermal dissipation properties in low and high ambient temperatures. The superior thermal heat sink design by Ligman used in conjunction with the driver, controls thermals below critical temperature range to ensure maximum luminous flux output, as well as providing long LED service life and ensuring less than 10% lumen depreciation at 50,000 hours.

Surge Suppression

Standard 10kv surge suppressor provided with all fixtures.

BUG Rating

B3 - U0 - G0

Finishing

All Ligman products go through an extensive finishing process that includes fettling to improve paint adherence.

Paint

UV Stabilized 4.9Mil thick powder coat paint and baked at 200 Deg C. This process ensures that Ligman products can withstand harsh environments. Rated for use in natatoriums.

Hardware

Provided Hardware is Marine grade 316 Stainless steel.

Anti Seize Screw Holes

Tapped holes are infused with a special anti seize compound designed to prevent seizure of threaded connections, due to electrolysis from heat, corrosive atmospheres and moisture.

Crystal Clear Low Iron Glass Lens

Provided with tempered, impact resistant crystal clear low iron glass ensuring no green glass tinge.

Optics & LED

Precise optic design provides exceptional light control and precise distribution of light. LED CRI > 80

Lumen - Maintenance Life

L80 /B10 at 50,000 hours (This means that at least 90% of the LED still achieve 80% of their original flux)

Ceiling-recessed exterior asymmetric downlights. Tough and sturdy under-canopy fixture family with high-outputs and an impressive array of optical asymmetric beam options.

A Robust exterior or interior downlight with a selection of light distributions. The Robust is unique as it is available with Type II,III & IV light distribution options that facilitates wider spacing and even light distribution between the light fixtures.

This provides higher energy saving and reduced installation costs. The Robust can be manufactured using different type beam optics to achieve custom distribution, e.g using type II and type IV optics inside the same luminaire. (Contact factory for more details)

The driver is integral. A selection of round or square front frames make this luminaire an attractive option for most design applications. Choices of stainless steel or powder coat painted aluminum front frames are available.




For applications where the ceiling is not rigid enough to support the weight of the fixture, a ceiling tray can be specified, please see options below.

All Ligman fixtures can be manufactured using a special pre-treatment and coating process that ensures the fixture can be installed in natatoriums as well as environments with high concentrations of chlorine or salt and still maintain the 5 year warranty. For this natatorium rated process please specify NAT in options. Not suitable for saunas and steamrooms

To meet International Dark Sky criteria, 3000k or warmer LEDs must be selected.



29w COB - 2566 Lumens
IP65 • Suitable For Wet Locations
IK08 • Impact Resistant (Vandal Resistant)
Weight 8 lbs

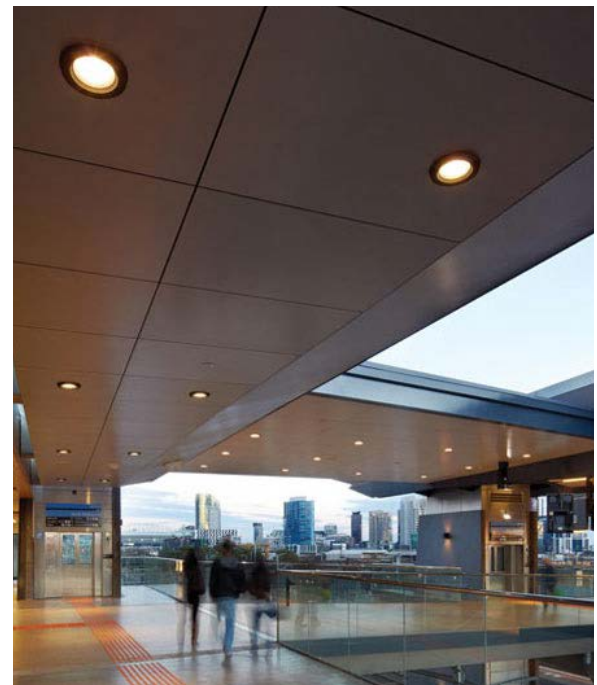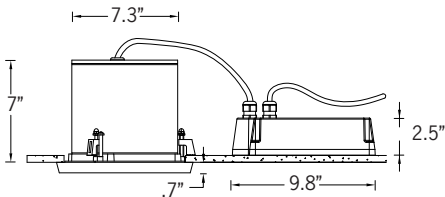

URO-80477

Robust 1 Round Asymmetrical Ceiling Downlight

PROJECT		DATE	
----------------	--	-------------	--

QUANTITY		TYPE		NOTE	
-----------------	--	-------------	--	-------------	--

ORDERING EXAMPLE || URO - 80477 - 29w - AS - W30 - 02 - 120/277v - Options

URO-80477					
LAMP	BEAM	LED COLOR	FINISH COLOR	VOLTAGE	
29w COB 2566 Lumens	AS - Asymmetrical 46"x56"	W27 - 2700K W30 - 3000K W35 - 3500K W40 - 4000K	01 - BLACK RAL 9011 02 - DARK GREY RAL 7043 03 - WHITE RAL 9003 04 - METALLIC SILVER RAL 9006 05 - MATTE SILVER RAL 9006 06 - LIGMAN BRONZE 07 - CUSTOM RAL	120/277v Other - Specify	

--	--	--	--

ADDITIONAL OPTIONS

- | | |
|-------------------------|---------------------------------------|
| RT - Rough In Tray | EMR - Remote Mount Emergency Inverter |
| DIM - 0-10v Dimming | F - Frosted Lens |
| CPB - Concrete Pour Box | NAT - Natatorium Rated |

Robust Product Family



Robust 1

- URO-80476-37w-3768lm
- URO-80477-29w-2566lm
- URO-80478-42w-3418lm



Robust 2

- URO-80486-37w-3910lm
- URO-80487-29w-2566lm
- URO-80488-42w-3418lm



Robust 3

- URO-80496-37w-3768lm
- URO-80497-29w-2566lm
- URO-80498-42w-3418lm