


LUMINAIRE SPECIFICATION

Head Office: Tel: 503-645-0500 7144 NW Progress Ct Fax: 503-645-8100 Hillsboro, Oregon 97124 www.ligmanlightingusa.com

IP65 : Suitable for Wet Locations IK10 : Impact Resistant (Vandal Resistant)

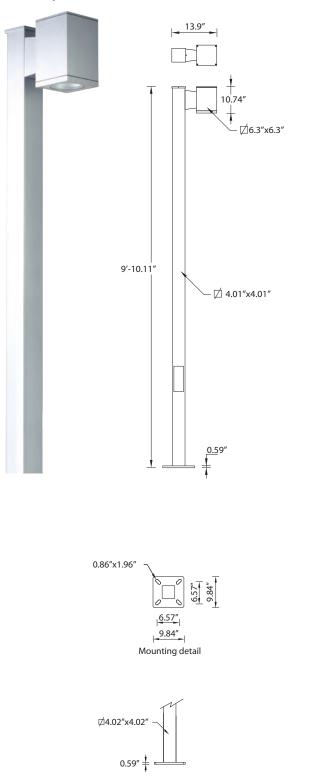

UTA-20693 Tango 13 single post top LED

Tango post top luminaire was developed to compliment the Tango and Jet range of wall mount luminaires as well as the Jet square bollards, using energy saving compact fluorescent, metal halide and high pressure sodium lamps. This rectangular profiled luminaire mounted on a square extruded aluminum pole is available with different reflectors, downward light beam distributions and lamp options. Designed for residential and shopping areas, squares and parks. Available with a selection of integral electronic ballasts.

Low copper content die-cast aluminum housing and aluminum bottom frame with integral anti-glare baffles. Stainless steel screws. Durable silicone rubber gasket and clear toughened glass lens. Single cable entry. Housing is treated with a chemical chromatized protection before powder coating, ensuring high corrosion resistance. Integral control gear. Anodized high purity aluminum reflector.

Physical Data Length: 13.9"

Height: 9.84"

Weight: 42.5 lb

Lamp

30w - 2075lm - White - LED (#)

Beam Angle (Please Specify)

N - Narrow Beam - 14°
M - Medium Beam - 25°

 \square W - Wide Beam - 40°

LED Color (Please Specify) W27 - 2700K W30 - 3000K W40 - 4000K

Voltage (Please Specify)

- □ 120V
- 🗆 277V

□ Other

Color (Please Specify)

- □ 01-Black RAL 9011 □ 03-White - RAL 9003 □ 05-Matt Silver - RAL 9006 □ 06-Bronze - RAL 6014
- D 02- Dark Grey RAL 7043
- □ 04 Metallic Silver RAL 9006
- □ 07- Custom RAL _____

ft



Lens

- F Frosted Lens
- C Clear Lens
- HGT Specify Custom Height _____



Intertel

Ordering Example : UTA - 20693 - White - 30w - N - W30 - 120v - Options



PROJECT:			DATE:
TYPE:	QUANTITY:	NOTE:	
Ligman Lighting USA reserves the right to change specifications without prior notice, please contact factory for latest information.			
Due to the continual improvements in LED technology data and components may change without notice.			