


# **LUMINAIRE SPECIFICATION**


Tel: 503-645-0500 7144 NW Progress Ct Fax: 503-645-8100 Hillsboro, Oregon 97124

www.ligmanlightingusa.com

IP65: Suitable for Wet Locations

IK08: Impact Resistant (Vandal Resistant)

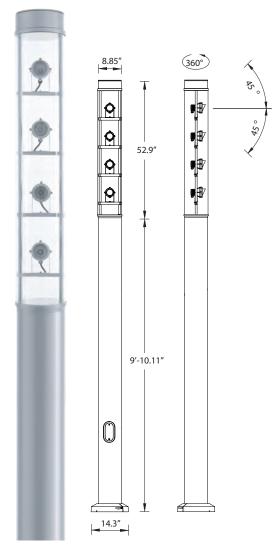



## UAR-20991

### Arizona 3 large light column LED

A Decorative Light Column using high power LED Floodlights with a selection beam distributions. Ideal for precise lighting of facades, sculptures, signage and architectural details. The LED luminaires have long life, limited maintenance and constant lifetime performance.

The floodlights are manufactured with a High Pressure Die-cast low copper content aluminum housing which is treated with a Dual Phosphate protection before powder coating with UV Stabilized polyester powder coat, ensuring high corrosion resistance. Stainless steel screws. Durable High temperature silicone rubber gasket with excellent memory properties that ensure sustained sealing over many years of continued use. Clear tempered vandal resistant glass lens diffuser.

These Floodlights are enclosed inside a Clear, UV Stabalized, Vandal Resistant, Acrylic

The luminaires have high a power LED integral driver 120-277V, powering a high quality LED source with low energy consumption and long service life 60,000 - 80,000 hrs. These are available in 2700, 3000, 4000K

Extruded aluminum column manufactured to customer height requirements and is supplied complete with anchor bolts and aluminum bolt cover

The Floodlights are fully rotational and adjustable with a secure locking mechanism to ensure the fixture will not move after aiming.

Fixture heads can be arranged to suit designers requirements with different fixture quantities, beam options as well as lamp wattages to provide the desired lighting solution.

#### **Physical Data**

Length: 14.3" Height: 9' 10.11" Weight: 86.4 lb

#### Lamp

Beam Angle (Please Specify) □ N - Narrow Beam: 19 Deg

☐ M - Medium Beam: 25 Deg

□ W - Wide Beam: 34 Deg

#### LED Color (Please Specify)

□ W27 - 2700K

□ W30 - 3000K

□ W40 - 4000K

#### Voltage (Please Specify)

□ 120V

□ 277V

□ Other

#### Options (Please Specify)

Color (Please Specify)

□ 01-Black - RAL 9011

□ 03-White - RAL 9003

□ 05-Matt Silver - RAL 9006 □ 06-Bronze - RAL 6014

□ 02- Dark Grey - RAL 7043

DATE: \_

□ 04 - Metallic Silver - RAL 9006

□ 07- Custom - RAL



☐ GFCI - GFCI Receptacle - Specify Position



Ordering Example: UAR - 20991 - White - Qty4-12w - N - W30 - 120v - Options



PROJECT:

**OUANTITY:** 

NOTE: