

# ULE-40671

## Legend 9 Recessed

### Construction

#### Aluminum Casting

Less than 0.1% copper content - Marine Grade 6060 extruded & LM6 Aluminum High Pressure die casting provides excellent mechanical strength, clean detailed product lines and excellent heat dissipation.

#### Pre paint

8 step degrease and phosphate process that includes deoxidizing and etching as well as a zinc and nickel phosphate process before product painting.

#### Memory Retentive -Silicon Gasket

Provided with special injection molded "fit for purpose" long life high temperature memory retentive silicon gaskets. Maintains the gaskets exact profile and seal over years of use and compression.

#### Thermal management

LM6 Aluminum is used for its excellent mechanical strength and thermal dissipation properties in low and high ambient temperatures. The superior thermal heat sink design by Ligman used in conjunction with the driver, controls thermals below critical temperature range to ensure maximum luminous flux output, as well as providing long LED service life and ensuring less than 10% lumen depreciation at 50,000 hours.

#### BUG Rating

B0 - U1 - G1

#### Surge Suppression

Standard 10kv surge suppressor provided with all fixtures.

#### Finishing

All Ligman products go through an extensive finishing process that includes fettling to improve paint adherence.

#### Paint

UV Stabilized 4.9Mil thick powder coat paint and baked at 200 Deg C. This process ensures that Ligman products can withstand harsh environments. Rated for use in natatoriums.

#### Hardware

Provided Hardware is Marine grade 316 Stainless steel.

#### Anti Seize Screw Holes

Tapped holes are infused with a special anti seize compound designed to prevent seizure of threaded connections, due to electrolysis from heat, corrosive atmospheres and moisture.

#### High Impact Acrylic Lens

Manufactured with Ultra High Impact, Naturally UV Stabilized Injection Molded Acrylic.

#### Optics & LED

Precise optic design provides exceptional light control and precise distribution of light. LED CRI > 80

#### Lumen - Maintenance Life

L80 /B10 at 50,000 hours (This means that at least 90% of the LED still achieve 80% of their original flux)

### Rectangular time-honoured wall recessed accent range. Efficient, flexible and tough family in the classic brick-light proportions.


A range of vandal resistant rectangular wall recessed luminaires. Suitable for indoor or outdoor applications in residential, shopping and pedestrian areas as a decorative guide light. Available in a variety of frame and LED light source options, including turtle friendly amber LED.

The Legend 1 and 2 is available with powdercoated aluminum or stainless steel frames. This luminaire is provided with a powdercoated high pressure die-cast aluminum back box and can be pre shipped to the jobsite for concrete pour or masonry applications.



As an option, this luminaire can be provided with a special wall clamp bracket that provides a clamping option when installing in drywall or wood panel walls.

Available in amber and white 2700K, 3000K, 3500K and 4000K. Consult factory for additional colors. The Legend steplight range can be provided with colored lenses to provide a decorative architectural touch to the building, please see options.

All Ligman fixtures can be manufactured using a special pre-treatment and coating process that ensures the fixture can be installed in natatoriums as well as environments with high concentrations of chlorine or salt and still maintain the 5 year warranty. For this natatorium rated process please specify NAT in options. fixture can be installed in natatoriums as well as environments with high concentrations of chlorine or salt and still maintain the 5 year warranty. For this natatorium rated process please specify NAT in options.

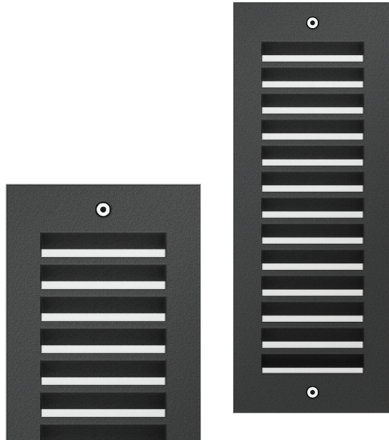


11w COB 114 Lumens  
IP65 • Suitable For Wet Locations  
IK07 • Impact Resistant (Vandal Resistant)  
Weight 3.5 lbs



### Additional Options (Consult Factory For Pricing)



SMB  
Surface Mount Box



DWC  
Dry Wall Clamp



# ULE-40671

Legend 9 Recessed

<b>PROJECT</b>	<input type="text"/>	<b>DATE</b>	<input type="text"/>
----------------	----------------------	-------------	----------------------

<b>QUANTITY</b>	<input type="text"/>	<b>TYPE</b>	<input type="text"/>	<b>NOTE</b>	<input type="text"/>
-----------------	----------------------	-------------	----------------------	-------------	----------------------

ORDERING EXAMPLE || ULE-40671 - 11w - W30 - 02 - 120/277V

<b>ULE-40671</b>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
------------------	----------------------	----------------------	----------------------	----------------------

LAMP	LED COLOR	FINISH COLOR	VOLTAGE
------	-----------	--------------	---------

- |                       |  |   |   |
|-----------------------|--|---|---|
| 11w COB<br>114 Lumens | W27 - 2700K<br>W30 - 3000K<br>W35 - 3500K<br>W40 - 4000K | 01 - BLACK RAL 9011<br>02 - DARK GREY RAL 7043<br>03 - WHITE RAL 9003<br>04 - METALLIC SILVER RAL 9006<br>05 - MATTE SILVER RAL 9006<br>06 - LIGMAN BRONZE<br>07 - CUSTOM RAL | <br>120/277v<br>Other - Specify |
|-----------------------|--|---|---|

<input type="text"/>	<input type="text"/>	<input type="text"/>
----------------------	----------------------	----------------------

## ADDITIONAL OPTIONS


- |                                |                 |
|--------------------------------|-----------------|
| DIM - 0-10v Dimming            | COLOR FILTERS   |
| NAT - Natatorium Rated         | RD - Red Lens   |
| AM - Turtle Friendly Amber LED | BL - Blue Lens  |
| SMB - Surface Mount Box        | AM - Amber Lens |
| C - Clear Lens                 | GR - Green Lens |
| DWC - Dry Wall Clamp           |                 |

# Surface Box Conduit Entry Location For Legend



Option 1 - Back Conduit Entry

3/4" Knockouts

1/2" Knockouts

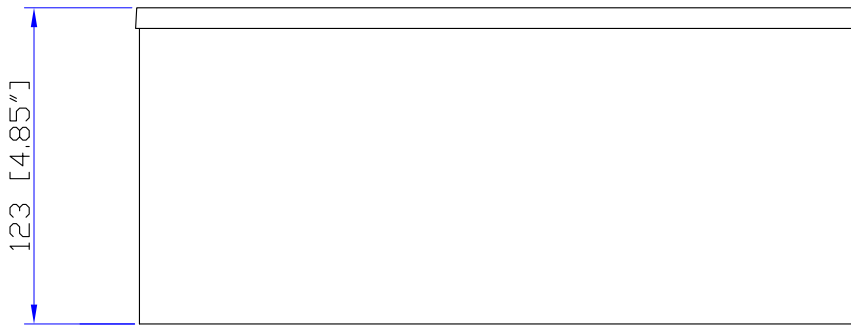

Side View

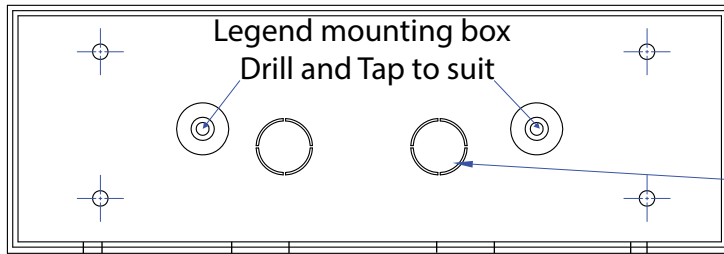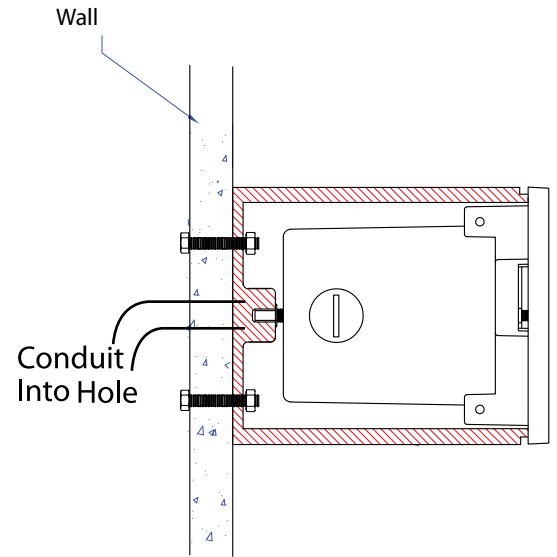


3/4" or 1/2" conduit entry

Front View of surface mount box  
no Legend fixture installed



Option 2 - Side Conduit Entry

3/4" Knockouts

1/2" Knockouts

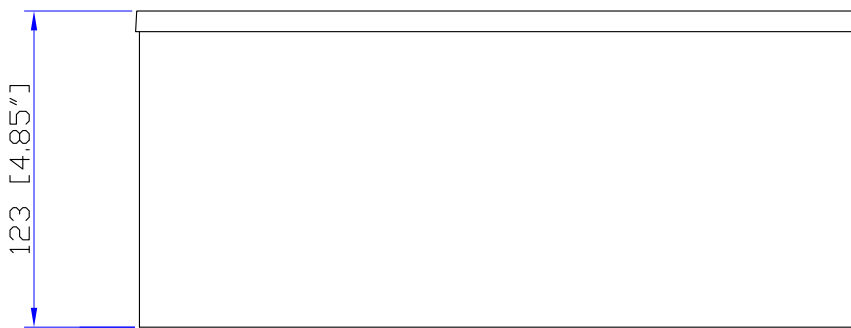

Side View

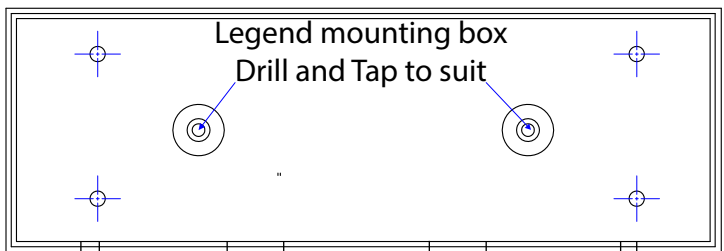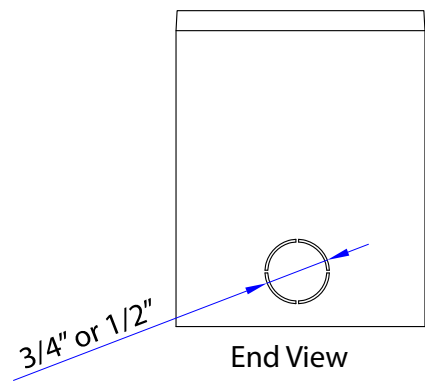

Front View of surface mount box  
no Legend fixture installed

# Legend Product Family




Legend 1

- ULE-40591-11w-420lm
- ULE-40721-11w-399lm



Legend 2

- ULE-40601-11w-155lm
- ULE-40722-11w-287lm



Legend 3

- ULE-40611-11w-114lm



Legend 4

- ULE-40621-11w-345lm



Legend 9

- ULE-40671-11w-114lm