

## One-Light Bath

 Wall mounted • Damp location listed 

### Description:

Tubular etched glass shades pop against a geometric back plate to create Colonnade, an LED bath and vanity collection. Modern style and continuous illumination are ideal for a variety of bath and vanity settings - including Mid-Century and Luxe. LED source features 3000K and 90 CRI benefits, as well as a lifespan of more than 42,000 hours.

### Specifications:

- Polished Chrome (-015) (plated)
- Steel construction
- Etched White Glass Cylindrical
- Tubular etched glass shades pop against a geometric back plate in Colonnade
- 1-light 9.5-watt LED bath fixture
- Colonnade is an LED bath and vanity collection
- Adds task lighting on either side of mirror to eliminate shadows on face when getting ready in the morning
- An integrated LED source provides a variety of energy and cost savings benefits for the homeowner
- Measures 4 3/4"W x 7 1/2" H
- 545 lumens 56 lumens/watt (delivered)
- Warm white 3000K lighting color and 90+CRI
- Ideal for Mid-Century and Luxe environments
- Dimmable with most Triac or ELV type dimmers
- Shop the complete Colonnade LED collection for a coordinated look throughout your bath and vanity areas
- Damp location listed
- Dimmable to 10% brightness (See Dimming Notes)
- Back plate covers a standard 4" octagonal recessed outlet box
- Mounting plate for outlet box included
- 6" of wire supplied
- Complies with "Americans with Disabilities Act" - ADA
- Meets California Title 24 JA8-2016

### Performance:

Number of Modules	1
Input Power	9.5w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Delivered)	545/56.2 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	50,000 (L70/TM-21)
FCC	Meets FCC Title 47, Part 15 Class B
Min. Start Temp	-10 °C
Warranty	5 year limited warranty
Labels	cETLus Damp location listed
	Meets California Title 24 JA8-2016

## P300185-015-30

### Images:



### Dimensions:

Width: 4-3/4"  
 Depth: 3-7/8"  
 Height: 7-1/2"  
 H/CTR: 3-7/8"

Glass  
 Width: 2-3/8"  
 Length: 2-3/8"  
 Height: 7-1/2"

**Photometrics:**


## P300185-015-30

<b>ELECTRICAL DATA</b>	<b>P300185-015-30</b>
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.079 A
Input Power	9.5
Power Factor	Greater than 0.90
THD	<20%
FCC	Meets FCC Title 47, Part 15 Class B
Operating Temperature	-10 °C to
Dimming	Yes*

\*See Dimming Notes for more information

**P300185-015-30**

LED Light Engine: 3000 K 90 CRI  
 System Wattage: 9.5  
 Fixture delivered lumens: 545  
 Fixture Efficacy: 56.2  
 Spacing Criteria:

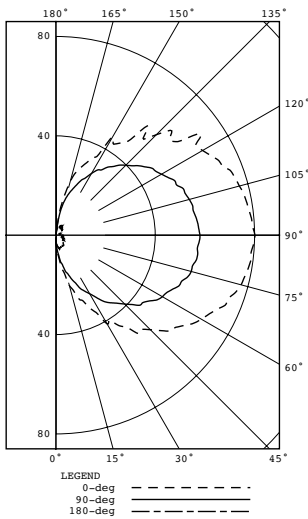

Test 18.00097 Test Date 02/01/18

**CANDELA DISTRIBUTION**

CANDELA	DISTRIBUTION			FLUX	
	0.0	45.0	90.0	135.0	180.0
0	1.2	1.2	1.2	1.2	1.2
5	6.6	6.4	5.8	4.2	3.5
15	20.9	19.0	15.1	9.2	5.9
25	32.4	31.3	23.9	12.9	6.2
35	44.5	42.5	32.0	15.6	5.2
45	53.8	52.3	39.2	18.2	4.2
55	63.3	61.8	46.1	20.7	3.5
65	71.1	69.5	51.7	22.7	3.0
75	77.2	75.5	56.4	24.9	3.0
85	78.9	77.3	57.2	24.5	2.7
90	80.1	78.2	58.0	25.0	2.9
95	79.0	77.3	57.3	24.2	1.9
105	76.5	74.7	55.6	23.9	1.5
115	71.9	70.0	52.5	22.9	2.2
125	71.3	62.7	47.1	21.2	3.2
135	57.2	54.1	39.8	18.0	3.2
145	45.3	43.8	32.1	15.2	3.6
155	33.9	32.8	24.5	12.7	4.2
165	22.3	19.9	15.3	9.2	3.7
175	0.0	0.0	0.0	0.0	0.0
180	0.1	0.1	0.1	0.1	0.1

**ZONAL LUMEN SUMMARY**

ZONE	LUMENS	%FIXT
0-30	15	2.9
0-40	33	6.6
0-60	96	19.4
0-90	248	50.0
90-120	150	30.3
90-130	187	37.8
90-150	233	47.1
90-180	248	50.0
0-180	496	100.0

**P300185-015-30****Dimming Notes:**

---

P300185 is designed to be compatible with many Triac/Forward Phase or ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

**Dimming Controls**

---

Lutron - DVCL-253P

Lutron - Caseta Wireless

Leviton – 6672

Leviton – 6681

Lutron - AYCL-153P

Lutron - AYLV-600P

Lutron - NTLV-600

Lutron - N-600

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.