

P350064 Semi-Flush/Convertible

Ceiling/Chain mounted • Damp location listed



Description:

Designed for both commercial and residential interiors, Apogee is an energy efficient, high performance LED fixture. All fixtures feature 120-277V input with standard dimming. Etched glass shade provides an even and pleasing light effect. Apogee is 3000K, 90+ CRI and meets California Title 24 - JA8 - 2016 standards and is ENERGY STAR rated and damp location listed.

Specifications:

- Architectural Bronze (-129) (painted)
- Steel construction Etched Glass shade
- Semi-flush fixture convertible to hanging pendant with included hardware and instructions
- Commercial-grade construction and performance
- Etched glass shade provides an even and pleasing light effect
- 3000K color temperature, 90CRI
- 120-277V operation, 0-10V compatible dimming
- 1855 lm, 66.7 Lum/Watt
- Dimmable to 10% brightness (See Dimming Notes)
- Canopy covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 15 feet of wire supplied
- Six feet of 9 gauge chain supplied
- ENERGY STAR® qualified
- Meets California Title 24 JA8-2016

Performance:

Number of Modules	1
Input Power	27.8w
Input Voltage	120 -277 V
Input Frequency	60 Hz
Lumens/LPW	1855/66.7 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	58,000 (L70/TM-21)
EMI/RFI	FCC Title 47, Part 15, Class A
Min. Start Temp	-30 °C
Max. Operating Temp	30°C
Warranty	5 year limited warranty
Labels	cETLus Damp location listed ENERGY STAR® qualified Meets California Title 24 JA8-2016

P350064-129-30

Images:



Dimensions:

Diameter: 15"
 Height: 10-3/4"
 Overall Ht. W/Chain: 85-1/4"

Glass
 Width: 12-3/4"
 Height: 2-1/8"


Photometrics:

P350064-129-30

ELECTRICAL DATA	P350064-129-30
Input Voltage	120 -277 V
Input Frequency	60 Hz
Input Current	0.232 A
Input Power	27.8
Power Factor	≥0.90
THD	<20%
EMI Filtering	FCC Title 47, Part 15, Class A
Operating Temperature	-30 °C to 30°C
Dimming	Yes*
Over-voltage, over-current, short-circuit protected	
*See Dimming Notes for more information	

P350064-129-30

LED Light Engine: 3000 K 90 CRI CRI
System Wattage: 27.8
Fixture delivered lumens: 1855
Fixture Efficacy: 66.7
Spacing Criteria: 0.232

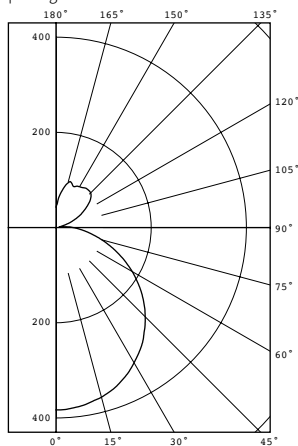

CANDELA DISTRIBUTION

DEG	CANDELA	LUMENS
0	383	
5	381	36
15	369	104
25	345	159
35	310	194
45	265	205
55	213	191
65	156	154
75	100	106
85	54	60
90	36	
95	18	21
105	15	17
115	49	48
125	81	72
135	103	79
145	102	64
155	95	45
165	97	27
175	62	6
180	43	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	299	18.8
0-40	493	31.1
0-60	888	55.9
0-90	1208	76.1
90-120	87	5.5
90-130	159	10.0
90-150	302	19.0
90-180	380	23.9
0-180	1588	100.0

P350064-129-30

Dimming Notes:

P350064 is designed to be compatible with many 0-10V controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

Lutron - NFTV

Lutron - NTFTV

Lutron - DDTV

Leviton - AWSMT-7DW

Leviton - IP710

Lithonia ISD BC

Pass & Seymour - CD4FB

Wattstopper ADF-120277

Hunt Dimming - PS-010-120V

Hunt Dimming - PS010 277V

Lightolier Controls - MP1500FAM120

Lightolier Controls - ZP600FAM120

Synergy Lighting Controls - V2000FAMU

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.