

LED Flush Mount

 Ceiling mounted • Damp location listed **PROGRESS LED**


P350085-009-30

Description:

Featuring a sleek and slim appearance, Bezel LED is an architectural series of flush mount options. Etched white glass is accented by a metal trim in a metallic finish. The glass shade is illuminated on both the bottom and sides to provide a pleasing lighted effect.

Specifications:

- Brushed Nickel (-009) (plated)
- Steel Construction
- Etched white Glass shade
- LED Module is replaceable (part # 93074039)
- Features a sleek and slim appearance inspired by architectural design
- One light LED flush mount
- Etched white glass is accented by a metal trim in a metallic finish
- Features 17-watt integrated LED to deliver energy savings and reduce long-term maintenance costs
- The glass shade is illuminated on both the bottom and sides to provide a pleasing lighted effect
- 1276 lumens, 73 lumens per watt (source)
- 3000K color temperature, 90CRI
- Dimmable to 10% brightness (See Dimming Notes)
- Canopy covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 6" of wire supplied
- ENERGY STAR® qualified
- Meets California Title 24 JA8-2016

Performance:

Number of Modules	1
Input Power	17w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Source)	1276/73 (LM-82)
Lumens/LPW (Delivered)	659/38.1 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	60,000 (L70/TM-21)
FCC	Meets FCC Title 47, Part 15 Class B
Min. Start Temp	-30 °C
Max. Operating Temp	30°C
Warranty	5 year limited warranty
Labels	cCSAus Damp location listed ENERGY STAR® qualified Meets California Title 24 JA8-2016

Images:



Dimensions:

Diameter: 10-1/2"
Height: 3-1/2"

Glass
Width: 9-3/4"
Height: 2-1/2"

Photometrics:

P350085-009-30

ELECTRICAL DATA	P350085-009-30
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.142 A
Input Power	17
Power Factor	Greater than 0.90
THD	<20%
FCC	Meets FCC Title 47, Part 15 Class B
Operating Temperature	-30 °C to 30°C
Dimming	Yes*

*See Dimming Notes for more information

P350085-009-30


LED Light Engine: 3000 K 90 CRI

System Wattage: 17

Fixture delivered lumens: 659

Fixture Efficacy: 38.1

Spacing Criteria:

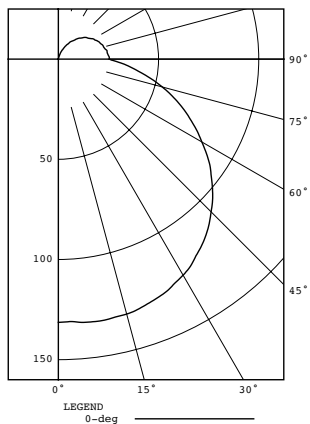

CANDELA DISTRIBUTION

DEG	CANDELA	LUMENS
0	131	
5	132	13
15	132	37
25	128	59
35	120	75
45	108	83
55	92	82
65	73	73
75	54	57
85	34	37
90	26	
95	25	27
105	23	25
115	22	21
125	18	17
135	15	11
145	11	7
155	6	3
165	2	0
175	0	0
180	0	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	109	17.4
0-40	184	29.3
0-60	350	55.8
0-90	516	82.3
90-120	73	11.7
90-130	90	14.3
90-150	108	17.2
90-180	111	17.7
0-180	627	100.0

Test 18.00251 Test Date 3/05/18

P350085-009-30**Dimming Notes:**

P350085 is designed to be compatible with many Triac/Forward Phase or ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

Lutron Diva DVELV-300P

Lutron Nova T NTELV-300

Lutron Caseta

Lutron Ariadni AY-600P

Leviton Illumatech IPI06-1LZ

Lutron Lumea LG-603PG

Leviton SureSlide 6672

Leviton SureSlide 6674

Lutron Ariadni AYCL-153P

Lutron Skylark Contour CTCL-153P

Lutron Diva DVCL-153P

Pass & Seymour Harmony DCL453PTCCCV6

Lutron Toggler TGCL-153P

Lutron Maestro MACL-153M

Lutron Ariadni AYL-600P

Lutron Maestro MA-600

Lutron NOVA T NTLV-600

Lutron Maestro MAELV-600

Lutron spacer/system SPSELV-600

Lutron Renoir II AWRMG-EAW

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.