

7IN LED Edgelit Recessed Downlight

Wet location listed **PROGRESS LED**


Description:

Slim, low profile recessed downlight combines innovative technology, aesthetics, functionality and affordability. No housing or J-Box required for installation and wet location listed provides the ultimate flexibility. The low profile downlight is ideal for many residential, multi-family, commercial and hospitality applications. Featuring a detachable driver box, which can be mounted remotely for shallow ceiling installations. Energy efficient design provides up to a 75% energy savings and up to 54,000 hours of LED life. Flicker free dimming down to 10% with many Forward Phase (Triac) and Electronic Low Voltage (ELV) dimmers.

Specifications:

- Antique Bronze (-020) (Painted)
- Die-cast aluminum construction
- White Polycarbonate lens
- Slim, low profile recessed downlight combines innovative technology, aesthetics, and functionality
- No housing or J-Box required for installation
- Featuring a detachable driver box, which can be mounted remotely for shallow ceiling installations
- IC rated and Air-Tight
- Flicker free dimming down to 10% with many Forward Phase (Triac) and Electronic Low Voltage (ELV) dimmers
- Energy efficient design provides up to a 75% energy savings and up to 54,000 hours of LED life
- Dimmable to 10% brightness (See Dimming Notes)
- ENERGY STAR® qualified
- Meets California Title 24 JA8-2016

Performance:

Number of Modules	1
Input Power	12w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW	809/67.4 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	54,000 (L70/TM-21)
EMI/RFI	FCC Title 47, Part 15 Class B
Min. Start Temp	-30 °C
Warranty	5 year warranty
Labels	cCSAus Wet location listed
	ENERGY STAR® qualified
	Meets California Title 24 JA8-2016



P800005-020-30

Images:



Dimensions:

(A) Inside Diameter: 6"
 (D) Light Emitting Surface (LES): 4.5"
 (C) Outside Diameter: 7"
 Height: 3"



A: INSIDE DIAMETER
 B: LIGHT EMITTING SURFACE (LES) DIAMETER
 C: OUTSIDE DIAMETER

7IN LED Edgelit Recessed Downlight

Wet location listed **PROGRESS LED**



Photometrics:

P800005-020-30

ELECTRICAL DATA **P800005-020-30**

Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.1 A
Input Power	12
Power Factor	0.99
THD	<20%
FCC	FCC Title 47, Part 15 Class B
Operating Temperature	-30 °C to 30°C
Dimming	Yes*

*See Dimming Notes for more information

P800005-020-30


LED Light Engine: 3000 K 90 CRI
System Wattage: 12
Fixture delivered lumens: 809
Fixture Efficacy: 67.4
Spacing Criteria: 1.25

CANDELA DISTRIBUTION

DEG	CANDELA	LUMENS
0	297	
5	296	28
15	286	81
25	265	122
35	234	146
45	192	148
55	144	129
65	95	94
75	48	50
85	8	11
90	0	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	231	28.5
0-40	377	46.6
0-60	654	80.8
0-90	809	100.0
90-180	0	0.0
0-180	809	100.0

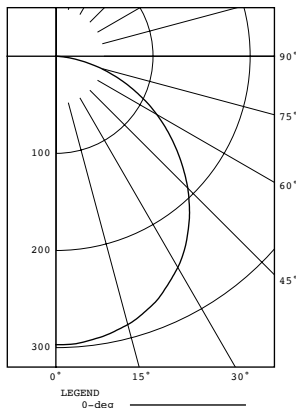

P800005-020-30

Dimming Notes:

P800005 is designed to be compatible with many ELV and Triac/Forward Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

Lutron - NTEVL-300

Lutron - DVELV-300P

Lutron - MAELV-601

Lutron - DVCL-253P

Lutron - Caseta Wireless

Lutron - AYCL-153P

Leviton - 6672 LED/CFL

Leviton - 6674

Leviton - AWSMT-EAW

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.