

P75 10 One-Light Undercabinet Undercabinet mounted • Damp location listed

Description:

120V AC LED Undercabinet in White finish.

Specifications:

- White (-30) (Painted)
- Die-cast aluminum construction
- Diffused polycarbonate lens
- Painted White (-30) finish.
- Die-cast aluminum enclosure.
- Diffuse polycarbonate lens.
- No driver or transformer is needed.
- Powered directly by 120V AC from a single location using P8740 Direct Wire J-Box.
- Each unit has 3 connection points - two sides and on back for versatility.
- Linkable using Hide-A-Lite (HAL3) linking cables/accessories (P8735, P8733, P8737, P8738, P8743).
- Easily mounts to undercabinet surface with (2) screws (provided).
- Uses (13) long life AC LEDs.
-
-

Performance:

Number of Modules	1
Input Power	4w
Input Voltage	120 V
Input Frequency	50/60 Hz
Lumens/LPW	316/79 (LM-79)
CCT	3000 K
CRI	84
Life (hours)	54,000 (L70/TM-21)
EMI/RFI	FCC Title 47, Part 15 Class B
Min. Start Temp	-30 °C
Max. Operating Temp	85 °C
Warranty	5 year warranty
Labels	cCSAus Damp location listed

P7510-30

Images:



Dimensions:

- (A) Diameter: 3-1/4"
- (B) Height: 0-15/16"

P7510 One-Light Undercabinet Undercabinet mounted • Damp location listed

Photometrics:


P7510-30

ELECTRICAL DATA	P7510-30
Input Voltage	120 V
Input Frequency	50/60 Hz
Input Current	0.035 A
Input Power	4
Power Factor	>0.90
THD	<20%
EMI Filtering	FCC Title 47, Part 15 Class B
Operating Temperature	-30 °C to 85 °C
Dimming	Yes*
Over-voltage, over-current, short-circuit protected	
*See Dimming Notes for more information	

P7510-30
 LED Light Engine: 3000 K 84 CRI
 System Wattage: 4
 Fixture delivered lumens: 316
 Fixture Efficacy: 79
 Spacing Criteria: 1.26

ZONAL LUMEN SUMMARY

Zone	Zone_Lumens	%_Luminaire
0-30	102	32.4
0-40	167	52.8
0-60	277	87.7
0-90	316	100
90-180	0	0.0
0-180	316	100.0

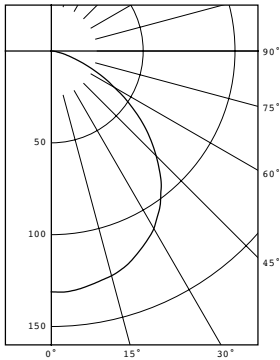

CANDELA DISTRIBUTION

DEGREE	CANDELA	LUMENS
0	131	
5	131	12
15	127	36
25	118	54
35	103	64
45	81	62
55	54	48
65	27	27
72	9	10
85	1	2
90	0	