

3IN Wall Mount Up/ Down Cylinder

Wall mounted • Wet location listed



Description:

Sleek, cylindrical forms in elegant finish selections. Die-cast aluminum wall brackets and heavy-duty aluminum framing. Fade and chip-resistant. CSA listed for wet locations. Can be used indoor or outdoor. Ideal for residential and commercial applications.

Specifications:

- Antique Bronze (-020) (painted)
- Aluminum Construction
- Clear glass lens
- 3" LED wall mount up/downlight cylinder
- This sleek, contemporary cylinder is ideal for indoor or outdoor applications
- An Antique Bronze finish complements a variety of exteriors
- Warm white, 3000K, color temperature, 90 CRI
- 1484 lumens, 62 lumens per watt (delivered)
- Die Cast Aluminum construction with durable powder coated finish
- Dimmable to 10% brightness (See Dimming Notes)
- Back plate covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 6" of wire supplied
- ENERGY STAR® qualified
- Meets California Title 24 JA8-2016

Performance:

Number of Modules	2
Input Power	24w per module
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW (Delivered)	1484/62 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	50,000 (L70/TM-21)
FCC	FCC Title 47, Part 15, Class B
Min. Start Temp	-10 °C
Max. Operating Temp	40 °C
Warranty	5 year warranty
Labels	CSA Wet location listed
	ENERGY STAR® qualified
	Meets California Title 24 JA8-2016

P563001-020-30K

Images:



Dimensions:

Width: 4-1/2"
 Depth: 5-1/2"
 Height: 8-1/4"
 H/CTR: 5"

Photometrics:


P563001-020-30K

ELECTRICAL DATA	P563001-020-30K
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	0.202 A
Input Power	24
Power Factor	
THD	<20%
FCC	FCC Title 47, Part 15, Class B
Operating Temperature	-10 °C to 40 °C
Dimming	Yes*

*See Dimming Notes for more information

P563001-020-30K

LED Light Engine: 3000 K 90 CRI
 System Wattage: 24
 Fixture delivered lumens: 1484
 Fixture Efficacy: 62
 Spacing Criteria: 1.25

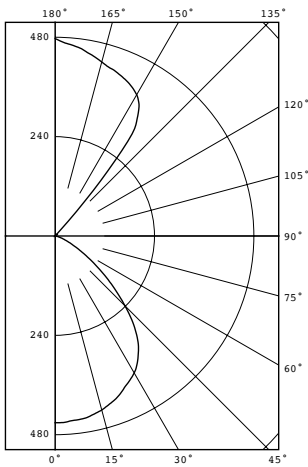

CANDELA DISTRIBUTION

DEG	CANDELA	LUMENS
0	451	
5	448	43
15	435	123
25	401	185
35	350	218
45	239	183
55	113	103
65	39	40
75	10	12
85	1	1
90	0	
95	0	0
105	1	1
115	1	1
125	4	3
135	6	16
145	345	198
155	412	190
165	435	123
175	463	44
180	477	

ZONAL LUMEN SUMMARY

ZONE	LUMENS	%FIXT
0-30	351	23.6
0-40	568	38.3
0-60	855	57.6
0-90	908	61.2
90-120	2	0.1
90-130	6	0.4
90-150	220	14.8
90-180	576	38.8
0-180	1484	100.0

Test 17.02586 Test Date 10/10/17

P563001-020-30K

Dimming Notes:

P563001 is designed to be compatible with many Triac/Forward Phase controls.

The following is a partial list of known compatible dimmer controls.

Dimming Controls

Lutron DVELV-300P

Lutron Caseta Wireless

Leviton 6672

Lutron AYCL-153P

Lutron TGCL-153-PH-WH

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.