

# White LED Outdoor Flush Mount Cylinder Ceiling flush mounted • Damp location listed

## Description:

6" flush mount cylinder. The P5741 Series are ideal for a wide variety of interior and exterior applications including residential and commercial. The Cylinders feature a 120V alternating current source and eliminates the need for a traditional LED driver. This modular approach results in an encapsulated luminaire that unites performance, cost and safety benefits.

## Specifications:

- White (-30) (Powder Coat Paint)
- Die cast and extruded aluminum Construction
- Ideal for a wide variety of interior and exterior applications.
- 1295 lumens 44 lumens/watt
- 3000K color temperature, 90+ CRI
- Dimmable to 10% brightness (See Dimming Notes)
- Unit covers a standard 4" octagonal recessed outlet box
- Mounting strap for outlet box included
- 6" of wire supplied
- Meets California Title 24 high efficacy requirements for outdoor use only

## Performance:

Number of Modules	1
Input Power	29.3w
Input Voltage	120 V
Input Frequency	60 Hz
Lumens/LPW	1295/44.1 (LM-79)
CCT	3000 K
CRI	90 CRI
Life (hours)	60,000 (L70/TM-21)
FCC	FCC Title 47, Part 15 Class B
Min. Start Temp	-30 °C
Max. Operating Temp	30 °C
Warranty	5 year warranty
Labels	cCSAus Damp location listed Meets California Title 24 high efficacy requirements for outdoor use only

## P5741-30/30K

## Images:



## Dimensions:

Diameter: Diameter: 6"  
Height: 12"

# White LED Outdoor Flush Mount Cylinder Ceiling flush mounted • Damp location listed **PROGRESS LED**

**Photometrics:**

## P5741-30/30K

<b>ELECTRICAL DATA</b>	<b>P5741-30/30K</b>
Input Voltage	120 V
Input Frequency	60 Hz
Input Current	
Input Power	29.3
Power Factor	
THD	<20%
FCC	FCC Title 47, Part 15 Class B
Operating Temperature	-30 °C to 30 °C
Dimming	Yes*
Over-voltage, over-current, short-circuit protected	
*See Dimming Notes for more information	

**P5741-30/30K**


LED Light Engine: 3000 K 90 CRI CRI  
 System Wattage: 29.3  
 Fixture delivered lumens: 1295  
 Fixture Efficacy: 44.1  
 Spacing Criteria: 1.1

**CANDELA DISTRIBUTION**

DEG	CANDELA	LUMENS
0	682	
5	686	66
15	686	193
25	596	271
35	412	258
45	268	207
55	149	138
65	96	93
75	49	52
85	15	17
90	0	

**ZONAL LUMEN SUMMARY**

ZONE	LUMENS	%FIXT
0-30	530	40.9
0-40	788	60.8
0-60	1132	87.4
0-90	1295	100.0
90-180	0	0.0
0-180	1295	100.0

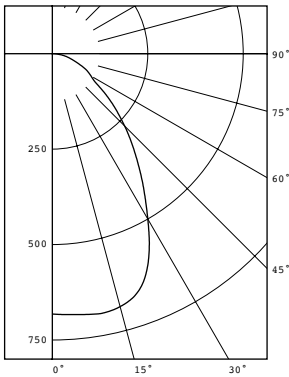

## P5741-30/30K

### Dimming Notes:

---

P5741 is designed to be compatible with many ELV/Reverse Phase controls.

The following is a partial list of known compatible dimmer controls.

### Dimming Controls

---

Lutron Diva DVELV-300P

Lutron Nova NTELV-300

Lutron Verti VTELV-600

Lutron MAELV-600

Lutron SPELV-600

Leviton AWRMG-EAW

Leviton 6615-P

Dimming capabilities will vary depending on the dimmer control, load, and circuit installation. Always refer to dimmer manufacturer instructions or a controls specialist for specific requirements.

Dimmer control brand names where identified above are trade names or registered trademarks of each respective company.