


DATE: \_\_\_\_\_ TYPE: \_\_\_\_\_

NAME: \_\_\_\_\_

PROJECT: \_\_\_\_\_

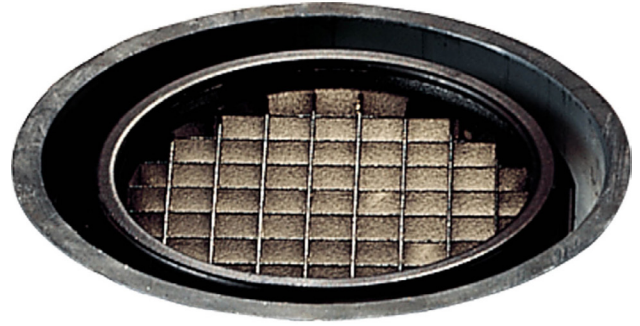

Halogen

# P5229-31

## Well Lights

Black low voltage adjustable well light. Inconspicuous up light adjusts to 45° from its concealed in-ground installation. (Requires external transformer). Well sleeve is made of 1/4 inch thick PVC pipe. Installs flush or reversed provides lamp shielding. 2" of wire provided with spade connectors to attach to the lamp. 12volt.

Diameter: 6-5/8"  
Height: 13-1/4"

- Well sleeve is 1/4" thick PVC pipe and installs flush or reversed provides lamp shielding.
- Inner lamp holder assembly adjusts up and down.
- Lamp holder ring pivots to allow lamp to be adjusted from straight up to approximately a 45 degree angle.
- Units must be wired to an approved 12V transformer of proper capacity.
- Wire provided with spade connectors to attach to the lamp.
- Optional 45° cube cell louver (shown, P8613-31) fits under supplied glass lens for glare control.
- Optional tempered glass cover available for added lamp protection (P8684-31).

Category: Landscape

Finish: Black (powdercoat)

Construction: PVC construction

Glass/Shade: Clear glass lens

MOUNTING	ELECTRICAL	LAMPING	ADDITIONAL INFORMATION
In ground mounted	Pre-wired 6 feet of wire supplied 12 V	Quantity: One 75w max. PAR-36 (12V) Terminal lug base porcelain terminal lug	UL Wet location listed 1 year warranty