

CATALOG #: _____

TYPE: _____

PROJECT: _____

FEATURES

- Durable steel construction
- Provides 120 minutes of emergency operation
- Energy-efficient, long-life LED EXIT or STAIR sign illumination
- Adjustable Chicago approved white LED lamp heads
- Fully automatic solid-state two rate charger recharges battery in 24 hours
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- Remote capacity available, see options
- Low voltage disconnect prevents battery from deep discharge

SPECIFICATIONS

- **HOUSING** – Durable, powder-coated 20-gauge steel construction
- **ELECTRICAL** – Dual 120/277V standard. 6V sealed lead acid, maintenance-free, rechargeable battery. Two 6V 5.3W LED lamp heads. 10W remote capacity when specified with RC option.
- **MOUNTING** – Mounting canopy included for top or end mount. Universal knockout pattern on back plate for wall mount.
- **LISTINGS** –
 - UL 924 standard as an exit light suitable for dry or damp locations (20°C - +50°C).
 - Meets NFPA 101 Life Safety Code, NEC, OSHA, local and state codes.
 - Meets City of Chicago requirements.
- **WARRANTY** – 5-year limited warranty, see hew.com/warranty.

ORDERING EXAMPLE: EXIT/EM/CHICAGO - SF - WHT - DA - OPTIONS - D

ORDERING INFO

SERIES	NUMBER OF FACES	HOUSING COLOR	DIRECTIONAL ARROWS
EXIT/EM/CHICAGO	SF Single face UF Universal single/ double face	WHT Industry-standard white BLK Black	EXIT SIGNAGE NA No Arrows DA Double arrows LA Left arrows ^[1] RA Right arrows ^[2] LARA Left/Right arrow ^[3] STAIR SIGNAGE SWNA Stairs no arrow SWDA Stairs double arrows SWRA Stairs right arrow ^[4] SWLA Stairs left arrow ^[5] SWLARA Stairs left/right arrow ^[6]

OPTIONS	VOLTAGE
RC Remote capable	D 120V/277V

REMOTE HEADS: SRHL - S - WHT - OPTIONS - 6V ^[7]

SERIES	HOUSING	HOUSING COLOR	OPTIONS	VOLTAGE
SRHL Single remote head	D Die-cast ^[8]	BLK Black	HL 1.5-watt remote head, 12 LEDs ^[13]	6V 6-volt ^[14]
SDRHL Dual remote head	P Polycarbonate ^[9]	GRAY Gray ^[11]		MV Multi-voltage ^[15]
WETRHL Wet location single remote head	S Steel ^[10]	WHT Industry-standard white ^[12]		
WETDRHL Wet location dual remote head				

NOTES

- ¹ Single face only.
- ² Single face only.
- ³ Double face only.
- ⁴ Single face only.
- ⁵ Single face only.
- ⁶ Double face only.
- ⁷ Optional. Ships separately. See page 2 for REMOTE HEAD DETAILS. Must specify RC option.
- ⁸ WETRHL and WETDRHL only.


- ⁹ WETRHL and WETDRHL only.
- ¹⁰ SRHL and SDRHL only.
- ¹¹ WETRHL and WETDRHL only.
- ¹² SRHL and SDRHL only.
- ¹³ WETRHL and WETDRHL only.
- ¹⁴ SRHL and SDRHL only.
- ¹⁵ WETRHL and WETDRHL only. For use with 3.6V, 6V, 9.6V, or 12V power source.

EXIT/EM/CHICAGO


LED
Chicago-Approved Exit & Emergency

FIXTURE DETAILS

DIRECTIONAL ARROWS

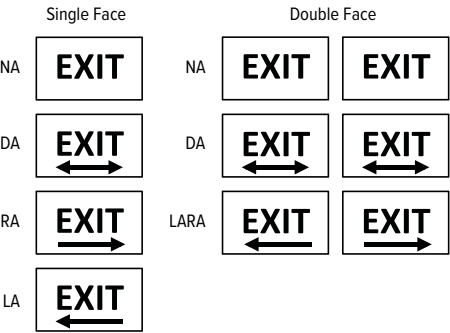

WALL MOUNT BOLT CIRCLE PATTERN

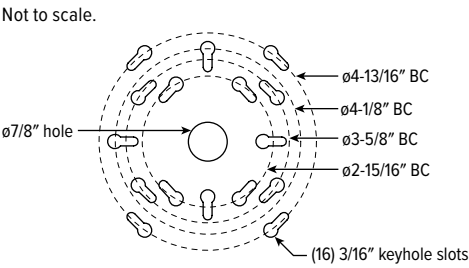

REMOTE HEAD DETAILS

SRHL



DIMENSIONS: 4-1/2" x 6-7/8"

SDRHL



DIMENSIONS: 9-1/4" x 7-1/4"

WETRHL



DIMENSIONS: 4-1/2" x 6-5/8"

WETDRHL



DIMENSIONS: 10-3/8" x 6-3/4"