




References

-  I SSL LED DIM0-10V
-  I SSL LED DIMBT

Certificates

-  CE
- Class I
- Dimmable:
120 - 277V
- Bluetooth Dimming:
220 - 240V
-  FSC
www.fsc.org
FSC® C110841
The mark of responsible forestry


Wood shade colours



-  20 Ivory White
-  21 Natural Cherry
-  22 Natural Beech
-  24 Yellow
-  25 Orange
-  26 Red
-  28 Blue
-  29 Grey
-  30 Turquoise
-  31 Chocolate
-  32 Pink




REF. I SSL LED 21
I-Club Slim


Components




-  **DIFF**
- Top diffuser**
Black or White
- Note:** The standard top diffuser is white. Black is also available if you want no upward light diffusion.
- Bottom diffuser**
Matt satin acrylic




-  **Metal canopy**
Brushed Nickel
34 x 11,5 x 5 cm
- Electrical cable**
Transparent 2 m drop
-  **Steel cable**
2 x 2 m drop

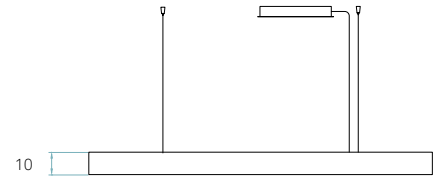
Packaging

-  **Box size**
182 x 37 x 25 cm
- Box volume**
0,168 m³
- Weight**
Gross - 11,6 Kg
Net - 4,1 Kg



-  **LED**
- LED**
-  **Linear Module**
5 x 5,5 W 350mA
- Energy class**
-  **A+**
- LED integrated

-  **INFO**
- Driver**
-  ERP
1 unit - Ref. ESS040W-1400-24
-  ERP
1 unit - Ref. ESS040W-1400-24
+ Bluetooth Control - CASAMBI / ELT
1 unit - Ref. CBU - ASD
- Driver housed in canopy.

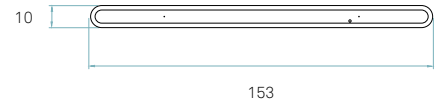

Details

Input Voltage	Luminous Flux *	CRI	Watt.	CCT	Lifetime (L70)
120 - 277V / 220 - 240V	1632 lm	90	25 W	3000 K	40000h

* Measurements taken using white shades, Veneer Ref: 20 Ivory White