

References

CERV S W LED DIM0-10V  
CERV S BK LED DIM0-10V

CERV S W LED DIMBT  
CERV S BK LED DIMBT

Awards



Brussels 2018

Certificates



Class I

Dimmable:  
120 - 277V

Bluetooth Dimming:  
220 - 240V



The mark of responsible forestry

Wood shade colours

- 20 Ivory White
- 21 Natural Cherry
- 22 Natural Beech
- 24 Yellow
- 25 Orange
- 26 Red
- 28 Blue
- 29 Grey
- 30 Turquoise
- 31 Chocolate
- 32 Pink

Metal Outer Shell

- W Matt White
- BK Matt Black



REF. CERV S BK LED 21  
Cervantes

Components



**Diffuser**  
Matt satin acrylic

**Canopy finish**  
Canopies will come in the same finish as the selected finish for the metal exterior of the lamp.



**Metal canopy**  
ø 17 cm - disc ø 23 cm

**Electrical cable**  
W - Transparent  
BK - Black textile  
2 m drop

**Steel cable**  
BK - Black  
3 x 2 m drop



**Box size**  
88 x 88 x 34 cm

**Box volume**  
0,263 m<sup>3</sup>

**Weight**  
Gross - 16,6 Kg  
Net - 10,4 Kg



LED

String  
30 x 1 W 24V

**Energy class**

**A<sup>+</sup>**  
LED integrated





Driver

EFORE  
1 unit - Ref. RCL030-1100A

EFORE  
1 unit - Ref. RCL030-1100A  
+  
Bluetooth Control - CASAMBI / ELT  
1 unit - Ref. CBU - ASD

Driver housed in canopy.

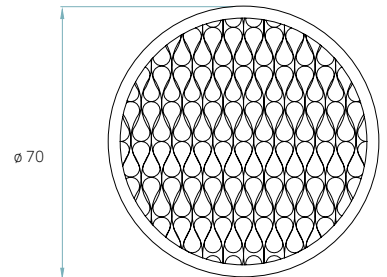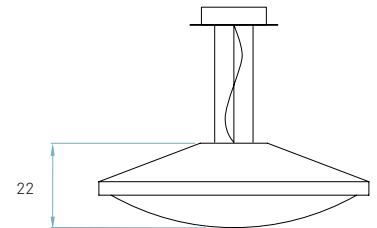

Details

Input Voltage	Luminous Flux *	CRI	Watt.	CCT	Lifetime (L70)
120 - 277V / 220 - 240V	896 lm	80	30 W	3000 K	40000h

\* Measurements taken using white shades, Veneer Ref: 20 Ivory White