

References



Certificates



Class I

Dimmable:
120 - 277V

Bluetooth Dimming:
220 - 240V



Wood shade colours

- 20 Ivory White
- 21 Natural Cherry
- 22 Natural Beech
- 24 Yellow
- 25 Orange
- 26 Red
- 28 Blue
- 29 Grey
- 30 Turquoise
- 31 Chocolate
- 32 Pink



REF. X SM LED 24, 26 & X SG 24, 26
X-Club

Components



Top diffuser
Black or White

Note: The standard top diffuser is white. Black is also available if you want no upward light diffusion.

Bottom diffuser
Matt satin acrylic



Metal canopy
Brushed Nickel
34 x 11,5 x 5 cm

Electrical cable
Transparent 2 m drop




Steel cable
4 x 2 m drop



Box size
79 x 79 x 42 cm

Box volume
0,262 m³

Weight
Gross - 10,1 Kg
Net - 5,2 Kg

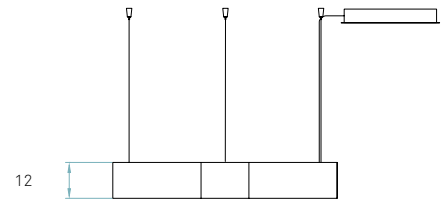

LED

Linear Module
4 x 8,1 W 700mA

Energy class

A+
LED integrated




Driver

EFORE
1 unit - Ref. RCL050-1400B

EFORE
1 unit - Ref. RCL050-1400B
+ Bluetooth Control - CASAMBI / ELT
1 unit - Ref. CBU - ASD

Driver housed in canopy.

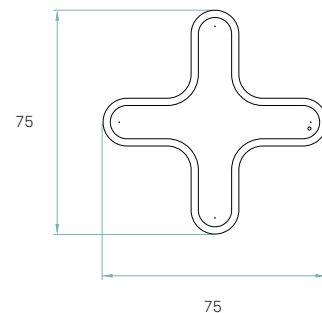

Details

Input Voltage	Luminous Flux *	CRI	Watt.	CCT	Lifetime (L70)
120 - 277V / 220 - 240V	2832 lm	90	35 W	3000 K	40000h

* Measurements taken using white shades, Veneer Ref: 20 Ivory White