













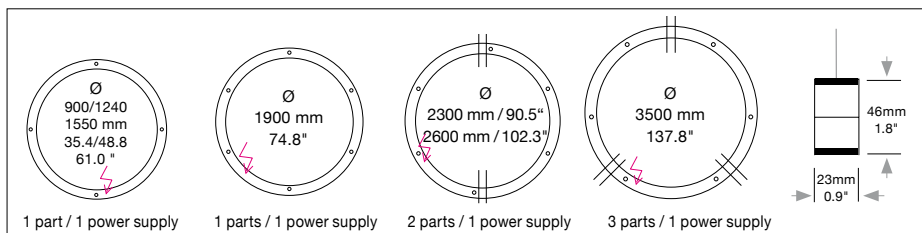

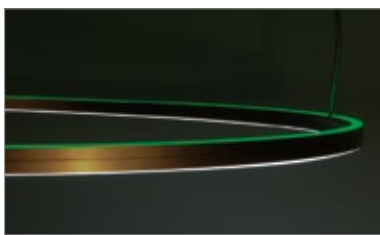












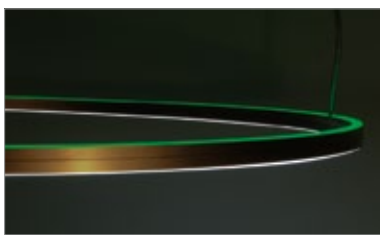
DOPPIO DIRECT / INDIRECT

Housing: Circular aluminum profile with integrated acrylic covers.
Design: SATTLER




	Size: L x W x H mm	inches	LED Watt	Lumen ¹⁾	weight kg ²⁾ / lbs ²⁾	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version	
Sizes	Ø 900 mm	35.4"	55 / 23	2,352 / 1,094	9 / 19.8	779.	X X.	X X.	X X.	X X.	X X X.	X	
	Ø 1240 mm	48.8"	72 / 30	3,027 / 1,300	10 / 22.0	780.	X X.	X X.	X X.	X X.	X X X.	X	
	Ø 1550 mm	61.0"	88 / 39	3,931 / 1,818	11 / 24.3	781.	X X.	X X.	X X.	X X.	X X X.	X	
	Ø 1900 mm	74.8"	110 / 46	4,592 / 2,120	12 / 26.5	782.	X X.	X X.	X X.	X X.	X X X.	X	
	Ø 2300 mm	90.5"	140 / 60	5,975 / 2,779	19 / 41.9	783.	X X.	X X.	X X.	X X.	X X X.	X	
	Ø 2600 mm	102.3"	165 / 69	6,702 / 3,067	21 / 46.3	784.	X X.	X X.	X X.	X X.	X X X.	X	
Indirect 	Ø 3500 mm	137.8"	210 / 88	8,753 / 4,178	29 / 63.9	785.	X X.	X X.	X X.	X X.	X X X.	X	
	Direct 												
Direct and indirect light separately switchable. If ordered with dimmer also separately dimmable													
DIRECT LED 24V CRI > 90 *CRI > 80		Warm-white		3000 K	(Standard)	X X X.	30.	X X.	X X.	X X.	X X X.	X	
		Neutral-white		4000 K	(Optional)	X X X.	40.	X X.	X X.	X X.	X X X.	X	
		Extra warm-white		2700 K	(Optional)	X X X.	27.	X X.	X X.	X X.	X X X.	X	
		Extra warm-white		2200 K*	(Optional)	X X X.	22.	X X.	X X.	X X.	X X X.	X	
INDIRECT LED 24V CRI > 90 *CRI > 80	 	Warm-white		3000 K	(Standard)	X X X.	X X.	X X.	30.	X X.	X X X.	X	
		Neutral-white		4000 K	(Optional)	X X X.	X X.	X X.	40.	X X.	X X X.	X	
		Extra warm-white		2700 K	(Optional)	X X X.	X X.	X X.	27.	X X.	X X X.	X	
		Extra warm-white		2200 K*	(Optional)	X X X.	X X.	X X.	22.	X X.	X X X.	X	
		RGB color control*			(Optional)	X X X.	X X.	X X.	60.	X X.	X X X.	X	
* (only in combination with dimming DMX, DALI)													
Dimming		Dimmable 0 - 10 V			(Standard)	X X X.	X X.	52.	X X.	X X.	X X X.	X	
		DMX (RGB possible)			(Optional)	X X X.	X X.	32.	X X.	X X.	X X X.	X	
		LUTRON (contact factory)			(Optional)	X X X.	X X.	72.	X X.	X X.	X X X.	X	
Finishes		11 white (Optional)						X X X.	X X.	X X.	X X.	X X X.	X
			22 aluminum polished	27 brush-finished aluminum	30 anthracite	32 crocodile black	33 sand silver fine textured						
		XX Custom finish											
			35 gold	36 brass	37 bronze fine textured	38 copper	10 black fine textured						
Power Supply Cable		Z 70 Silver (Optional)				X X X.	X X.	X X.	X X.	X X.	X X X.	X	
			Z 71 white	Z 72 grey	Z 73 black								
													
			Z 74 orange	Z 75 red	Z 76 green								
When using current carrying steel cables in Mounting Versions F, K, R, T leave this section blank													


DOPPIO DIRECT / INDIRECT




Housing: Circular aluminum profile with integrated acrylic cover on the downside.
Design: SATTLER

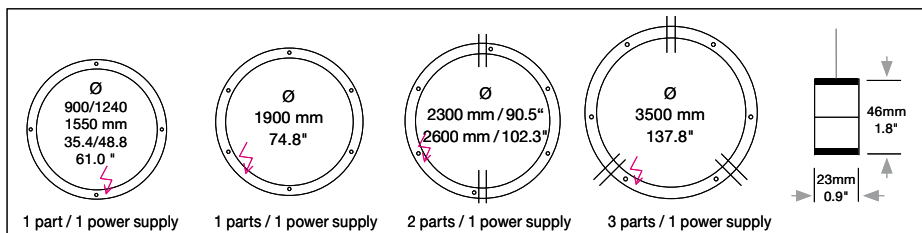


Mounting Version




Standard
up to Ø 1900 mm / 74.8"
4-point suspension
up to Ø 3500 mm
6-point suspension
with external power supply
unit in suspended ceiling




up to Ø 1900 mm / 74.8"
4-point suspension
up to Ø 3500 mm
6-point suspension
with external power supply
unit in separate canopy




up to Ø 1900 mm / 74.8"
suspension through canopy




up to Ø 1900 mm / 74.8"
4 current-carrying steel
cables. Not in combination
with RGB




up to Ø 1900 mm / 74.8"
Suspension with current-
carrying steel cables and
cavity wall box. Not in
combination with RGB.



up to Ø 1900 mm / 74.8"
Suspension with pendant
canopy PB 656
and steel cables
(a) 5000 mm / 196.8" +
(b) 3000 mm / 118.1"



up to Ø 1900 mm / 74.8"
Suspension with pendant
canopy PB 656 and current-
carrying steel cables.
(a) 5000 mm / 196.8" +
(b) 3000 mm / 118.1"
Not in combination with RGB.



up to Ø 1900 mm / 74.8"
Suspension point as clamp-
ing unit with 4/6 cables
and remote technical unit in
suspended ceiling.

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.

A, B, R, K = Distance of external power supply unit to light fixture max. 10m / 394".

E, F, S, T, K = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 5000mm/197"; Version F,R 3000mm/118";
Version S,T 5000 + 3000mm / 197"+118" and/or power supply cable 5000mm/197"

X X X.	X X.	X X.	X X.	X X.	X X X	X
--------	------	------	------	------	-------	---

Complete order number

Typ	Size mm / inch			For use with Mounting Version
	L	W	H	
DE 1F	360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	A,R (up to Ø 1900mm)		
DE 2F	360 x 300 x 85 mm / 14.2 x 11.8 x 3.3"	A,R (up to Ø 3500mm)		

Typ	Size mm / inch			For use with Mounting Version
	Ø cover plate / body / H			
DB 350	Ø 350 / 320 / 60 mm / 13.7 x 12.5 / 2.3"	B,E,F, (up to Ø 1900 mm)		
DB 500	Ø 510 / 470 / 60 mm / 20.0 x 18.5 / 2.3"	B, (up to Ø 3500 mm)		
PB 656	Ø 90 H 656 mm / 3.5 x 25.8"	S, T		

Canopy finish: white (11) contact factory for other finishes
USA/Canada: Canopy mounts to 4" octagonal junction box.


Input voltage for all external power supply units and canopy is **120 / 277 VAC 50/60 Hz**

Optional



LED spot in canopy
4W/20°-40°, 400 Lumen (order separately)

762. 67. 01. 04. 11. (white)



Ceiling mounting version A

Ceiling opening for power supply cable. Existing of cavity ceiling box with 80mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A.

200. 00. 00. 00. 11 (white)