


FINO PENDANT


Housing: Pendant light, aluminum housing
 Design: Ulrich Sattler | Michael Schmidt, Code2design

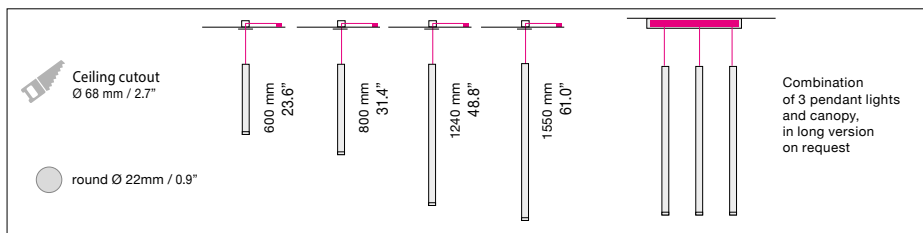


	Size: Ø mm	Inches	LED Watt	Lumen ¹	Weight ² kg / lbs	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
Sizes	Ø 22 / L 600	Ø 0.9 / L 23.6"	4	510	0.4 / 0.8	1533.	x x x.	x x x.	x x x.	x x x.	x x x x.	x
	Ø 22 / L 800	Ø 0.9 / L 31.4"	4	510	0.5 / 1.1	1534.	x x x.	x x x.	x x x.	x x x.	x x x x.	x
	Ø 22 / L 1240	Ø 0.9 / L 48.8"	4	510	0.7 / 1.5	1535.	x x x.	x x x.	x x x.	x x x.	x x x x.	x
	Ø 22 / L 1550	Ø 0.9 / L 61.0"	4	510	0.8 / 1.7	1536.	x x x.	x x x.	x x x.	x x x.	x x x x.	x
LED CRI > 90			Warm-white Neutral-white Extra warm-white	3000 K 4000 K 2700 K	(Standard) (Optional) (Optional)	x x x. x x x. x x x.	30. 40. 27.	x x x. x x x. x x x.	x x x. x x x. x x x.	x x x. x x x. x x x.	x x x x. x x x x. x x x x.	x x x
Dimming		Dimmable 0 - 10 V			(Standard)	x x x.	x x x.	51. 00.	x x x. x x x.	x x x. x x x.	x x x x. x x x x.	x x
Finishes (Standard)		66 brushed anodized bronze		60 silver anodized brushed		62 brushed anodized black		65 brushed anodized champ. gold			x x x. x x x. x x x. x x x.	x x x x
Power Supply Cable (Standard)		Z 80 black matte				x x x.	x x x.	x x x.	x x x.	x x x.	Z80.	x
Mounting Version		R Standard				x x x.	x x x.	x x x.	x x x.	x x x.	x x x x.	R

Dimensions of canopy

Typ **DA 80** Size mm / inch
Mounting version R, Ceiling cutout Ø 68 mm / 2.7"
Cover Ø 80 mm 3.1" / installation depth 80 mm / 3.1"
Color white 9003



DBL 390 Mounting version F (Contact factory)
 L 390 x W 70 x H 70 mm
 L 15.3 x W 2.7 x H 2.7"
 Mounts to 4" junction box.
 (For Combination of 3 pendant lights.
 Consult factory)




x x x.	x x x.	01.	00.	x x x.	Z80.	x
--------	--------	------------	------------	--------	-------------	---

Complete order number

Input voltage for all external power supply units and canopy is **120 / 277 VAC 50/60 Hz**

Dry Location Enclosure (Included)



13.25" (L) x 5" (W) x 2.25" (H)
 surface mount in any orientation

FINO PENDANT



410 381 1497 answers@inter-lux.com
 inter-lux reserves the right to make technical changes without notice

IP 20

Light distribution direct

Conforms to UL-STD 1598
 Certified to CSA-STD C22.2
 No.250.0-08

Technical data is subject to change. Errors and omissions excepted ¹Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit. ²Weight of lights without remote technical unit or canopy.