
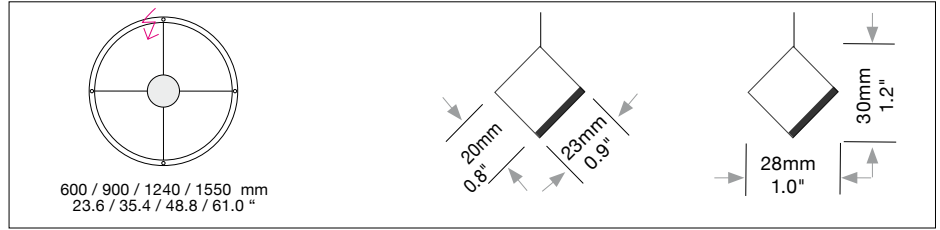



GIRATA Horizontal

Housing: Circular aluminum profile bent inwards 45°. Integrated acrylic cover.
Design: MARKUS BISCHOF

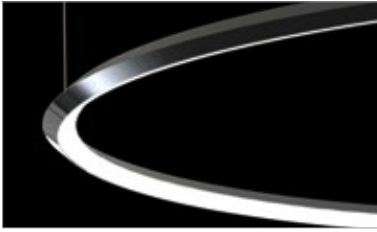


Sizes	Size: Ø mm	inches	LED Watt	Lumen ¹⁾	weight kg ²⁾ / lbs ²⁾	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version	
Sizes	Ø 600 mm	23.6"	33	1,530	3.0 / 6.6	895.	x x .	x x .	x x .	x x .	x x x .	x	
	Ø 900 mm	35.4"	55	2,486	3.5 / 7.7	896.	x x .	x x .	x x .	x x .	x x x .	x	
	Ø 1240 mm	48.8"	72	3,314	5.0 / 11.0	897.	x x .	x x .	x x .	x x .	x x x .	x	
	Ø 1550 mm	61.0"	88	4,060	5.5 / 12.1	898.	x x .	x x .	x x .	x x .	x x x .	x	
LED 24V CRI > 90 *CRI > 80			Warm-white Neutral-white Extra warm-white Extra warm-white	3000 K (Standard) 4000 K (Optional) 2700 K (Optional) 2200 K* (Optional)		30. 40. 27. 22.	x x x . x x x . x x x . x x x .	x x . x x . x x . x x .	x x . x x . x x . x x .	x x . x x . x x . x x .	x x x . x x x . x x x . x x x .	x x x x	
Dimming			Dimmable 0 - 10 V DMX (RGB possible) LUTRON (contact factory)	(Standard) (Optional) (Optional)		51. 31. 71.	x x x . x x x . x x x .	x x . x x . x x .	00. 00. 00.	x x . x x . x x .	x x x . x x x . x x x .	x x x	
Finishes		11 white		22 aluminum polished		27 brush-finished aluminum		30 anthracite		32 crocodile black		33 sand silver fine textured	
(Standard)				35 gold		36 brass		37 bronze fine textured		38 copper		10 black fine textured	
(Optional)												XX Custom finish	
							x x x .	x x .	x x .	x x .	.	x x x .	x
Power Supply Cable		000 without Mounting Version F		Z 70 Silver		Z 71 white		Z 72 grey		Z 73 black			
(Standard)				Z 74 orange		Z 75 red		Z 76 green					
(Optional)													
When using current carrying steel cables in Mounting Versions F, K, R, T leave this section blank							x x x .	x x .	x x .	x x .	x x .	.	x


GIRATA Horizontal

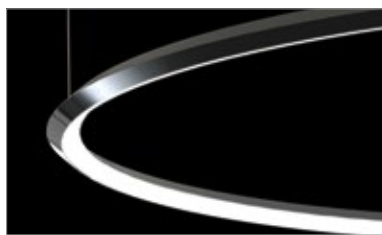


Housing: Circular aluminum profile bent inwards 45°. Integrated acrylic cover.
Design: MARKUS BISCHOF

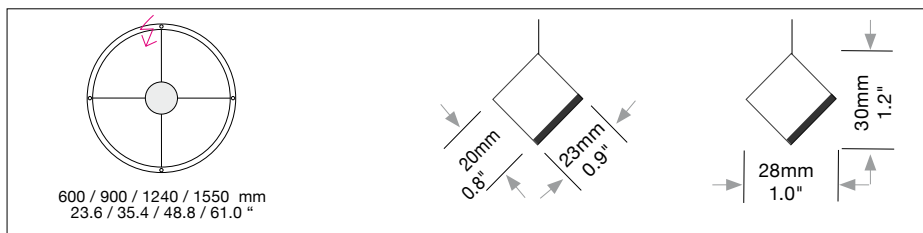


Mounting Version




4-point suspension with external power supply unit in suspended ceiling




4-point suspension with external power supply unit in separate canopy




suspension through canopy




4 current-carrying steel cables. Not in combination with RGB




Suspension with current-carrying steel cables and cavity wall box. Not in connection with RGB.




Suspension with pendant canopy PB 366 and steel cables (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1"



Suspension with pendant canopy PB 366 and current-carrying steel cables. (a) 5000 mm / 196.8" + (b) 3000 mm / 118.1" Not in combination with RGB.



Direct ceiling mounting 50mm / 1.9" with external power supply unit in suspended ceiling



Suspension point as clamping unit with 4 cables and remote technical unit in suspended ceiling.

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.

X X X.	X X.	X X.	X X.	X X.	X X X	X
--------	------	------	------	------	-------	---

Complete order number

A, B, G, R, K = Distance of external power supply unit to light fixture max. 10m / 394".


S, T, K, E, F = Minimum suspension height half the diameter of light fixture, maximum suspension height two times diameter of light fixture

Including steel cable suspension 5000mm/197"; Version F,R 3000mm/118"; Version S,T 5000 + 3000mm / 197"+118" and/or power supply cable 5000mm/197"

Dimensions of external power supply units			
Typ	Size mm / inch	For use with Mounting Version	
	L W H		
DE 1F	360 x 150 x 85 mm / 14.2 x 5.9 x 3.3"	A, G, R, K	

Input voltage for all external power supply units and canopy is
120 / 277 VAC 50/60 Hz

Canopy finish: white (11) contact factory for other finishes
USA/Canada: Canopy mounts to 4" octagonal junction box.




Dimensions of canopy (1 LED Stripe)			
Typ	Size mm / inch	For use with Mounting Version	
	Ø cover plate / body		
DB 230	Ø 230 / 210 mm / 9.5 x 8.3" up to size Ø 900 mm / 35.4"	B, E, F	
DB 290	Ø 290 / 260 mm / 11.4 x 10.2" up to size Ø 1550 mm / 61.0"	B, E, F	
PB 366	Ø 90 H 366 mm / 3.5 x 14.4" up to size Ø 1550 / 61.0"	S, T	

Optional



LED spot in canopy
(Girata size Ø 900 mm / 35.4", Dimension canopy DB 290)
4W/20°-40°, 400 Lumen (order separately)

762. 67. 01. 04. 11. (white)



Ceiling mounting version A, G

Ceiling opening for power supply cable. Existing of cavity ceiling box with 80mm / 3.1" round metal cover. Powder coated in white, fine textured. Applicable to mounting version A, G.

200. 00. 00. 00. 11. (white)