



## INSIEME

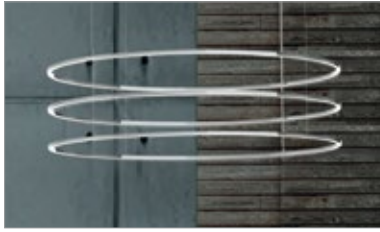

**Housing:** Pendant with light distribution up, out and down. 3 circular aluminum profiles, with integrated acrylic covers.

**Design:** MARKUS BISCHOF

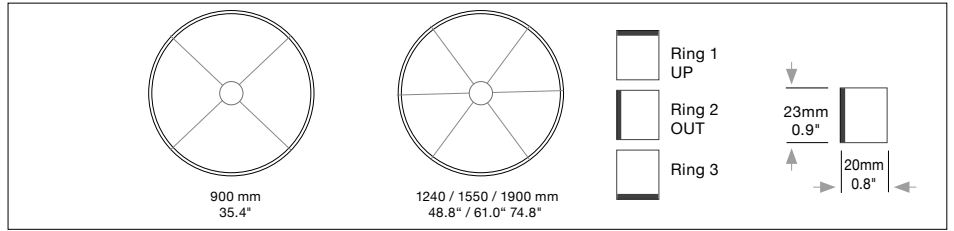


Size	Ø mm	inches	LED Watt	Lumen <sup>1)</sup>	weight kg <sup>2)</sup> / lbs <sup>2)</sup>	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
Ø 900 mm	900 mm	35.4"	165	8,560	5.0 / 11.0	<b>764.</b>	x x .	x x .	x x .	x x .	x x x .	x
Ø 1240 mm	1240 mm	48.8"	216	11,420	7.0 / 15.4	<b>765.</b>	x x .	x x .	x x .	x x .	x x x .	x
Ø 1550 mm	1550 mm	61.0"	264	13,885	9.0 / 19.8	<b>766.</b>	x x .	x x .	x x .	x x .	x x x .	x
Ø 1900 mm	1900 mm	74.8"	330	17,663	11.0 / 24.2	<b>767.</b>	x x .	x x .	x x .	x x .	x x x .	x
<b>LED</b> 24V CRI > 90 CRI > 80*		<b>Warm-white</b>	<b>3000 K</b>	<b>(Standard)</b>	x x x .	<b>30.</b>	x x .	x x .	x x .	x x x .	x	
		<b>Neutral-white</b>	<b>4000 K</b>	(Optional)	x x x .	<b>40.</b>	x x .	x x .	x x .	x x x .	x	
		<b>Extra warm-white</b>	<b>2700 K</b>	(Optional)	x x x .	<b>27.</b>	x x .	x x .	x x .	x x x .	x	
		<b>Extra warm-white</b>	<b>2200 K*</b>	(Optional)	x x x .	<b>22.</b>	x x .	x x .	x x .	x x x .	x	
<b>Dimming</b>		<b>Dimmable 0 - 10 V</b>		<b>(Standard)</b>	x x x .	x x .	<b>51.</b>	<b>00.</b>	x x .	x x x .	x	
		<b>DMX</b>		(Optional)	x x x .	x x .	<b>31.</b>	<b>00.</b>	x x .	x x x .	x	
		<b>LUTRON (contact factory)</b>		(Optional)	x x x .	x x .	<b>71.</b>	<b>00.</b>	x x .	x x x .	x	
<b>Finishes</b>		<b>11</b> white	(Standard)									
		<b>22</b> aluminum polished	(Optional)									
		<b>27</b> brush-finished aluminum										
		<b>30</b> anthracite										
		<b>32</b> crocodile black										
		<b>33</b> sand silver fine textured										
		<b>35</b> gold										
<b>36</b> brass												
<b>37</b> bronze fine textured												
<b>38</b> copper												
<b>10</b> black fine textured												
<b>XX</b> Custom finish												
<b>Power Supply Cable</b> (Standard)		<b>000</b> without Mounting Version F									<b>000</b>	x

## INSIEME




**Housing:** Pendant with light distribution up, out and down. 3 circular aluminum profiles, with integrated acrylic covers.

**Design:** MARKUS BISCHOF

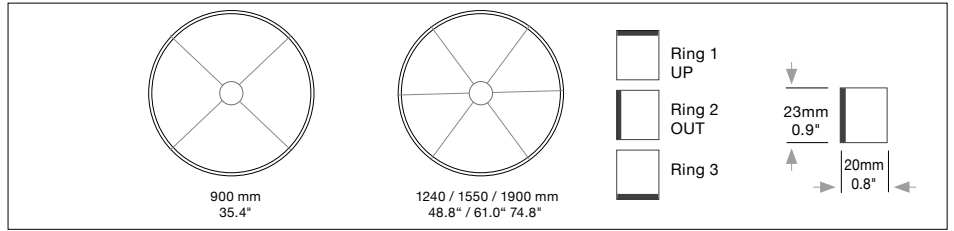

### Mounting Version



Ø 1900 mm / 74.8"  
6 current-carrying steel cables canopy and external power supply unit in suspended ceiling

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
X X X.	X X.	X X.	X X.	X X.	X X X	.

**J** = Distance of external power supply unit to light fixture max. 10m / 394"

**F** = Power supply unit in canopy Max. suspension height approx. 2.0 times diameter of light.

**Mounting version with 4 / 6 current-carrying steel cables 3000mm / 118"**

X X X.	X X.	X X.	X X.	X X.	X X X	X
--------	------	------	------	------	-------	---

**Complete order number**

**Dimensions of external power supply units**

Typ	Size mm / inch	For use with Mounting Version
DE 3F	360 x 400 x 85 mm / 14.2 x 15.7 x 3.3"	J

Input voltage for all external power supply units and canopy is **120 / 277 VAC 50/60 Hz**

**Dimensions of canopy**

Typ	Size mm / inch Ø cover plate / body / H	For use with Mounting Version
DB 350	Ø 350 / 320 mm / 13.7 x 12.6" H 60 mm / 2.3"	F

**Canopy finish: white (11)**  
contact factory for other finishes

USA/Canada: Canopy mounts to 4" octagonal junction box.