


## PALITO

Housing: Pendant light, aluminum housing  
 Design: Ulrich Sattler | Michael Schmidt, Code2design

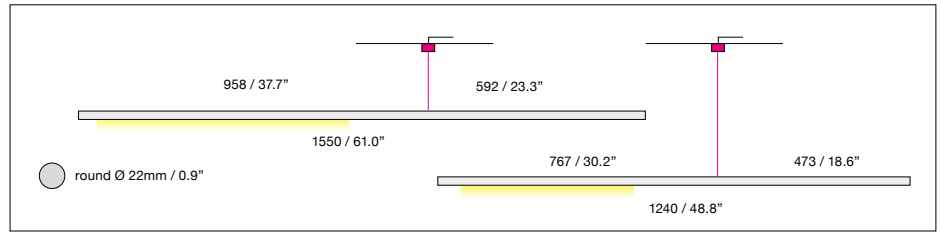

	Size: Ø / L mm	Inches	LED Watt	Lumen <sup>1</sup>	Weight <sup>2</sup> kg / lbs	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
<b>SIZE</b>	Ø 22 / L 1240	Ø 0.9 / L 48.8"	15	1760	1.4 / 3.1	<b>1541.</b>	x x x.	x x x.	x x x.	x x x.	x x x x.	x
	Ø 22 / L 1550	Ø 0.9 / L 61.0"	22	2640	2 / 4.4	<b>1542.</b>	x x x.	x x x.	x x x.	x x x.	x x x x.	x
<b>LED</b> 36V CRI > 90	 	<b>Warm-white</b>	<b>3000 K</b>	<b>(Standard)</b>	x x x.	<b>30.</b>	x x x.	x x x.	x x x.	x x x x.	x	
		<b>Neutral-white</b>	<b>4000 K</b>	<b>(Optional)</b>	x x x.							
		<b>Extra warm-white</b>	<b>2700 K</b>	<b>(Optional)</b>	x x x.							
<b>Dimming</b>	 <b>Without Dimmer</b>		<b>(Standard)</b>		x x x x.	x x x.	<b>01.</b>	<b>00.</b>	x x x.	x x x x.	x	
<b>Finishes</b>	 <b>66</b> brushed anodized bronze	Optional	 <b>60</b> silver anodized brushed	 <b>62</b> brushed anodized black	 <b>65</b> brushed anodized champ. gold	x x x x.	x x x.	x x x.	x x x.	. .	x x x x.	x
<b>Power Supply Cable</b> (Standard)	 <b>Z 80</b> Black					x x x x.	x x x.	x x x.	x x x.	x x x.	<b>Z80.</b>	x
<b>Mounting Version</b>	 <b>F</b> Height adjustable on canopy <b>Standard</b> 1-point straight suspension (2000 mm / 78.7" max.) with integral driver in canopy DB90/94.	 <b>R</b> Ceiling cutout Ø 68 mm / 2.7"				x x x x.	x x x.	x x x.	x x x.	x x x.	x x x x.	<b>F</b>
	 <b>DA 80</b> 1-point straight suspension (2000 mm / 78.7" max.) with DA80 canopy and remote mounted driver.					x x x x.	x x x.	x x x.	x x x.	x x x.	x x x x.	<b>R</b>

**Dimensions of canopy**

Type      Size mm / inch

**DB 90/94**    **Mounting version F (Standard)**  
 Ø 90 / H 94 mm / 3.5 x 2.0"  
**Color black (10), white on request**  
 Mounts to 4" junction box.

**DA 80**      **Mounting version R,** Ceiling cutout Ø 68 mm / 2.7"  
**Cover Ø 80 mm 3.1" , installation depth 80 mm / 3.1"**  
**Color white 9003**  
 Driver to be placed to a 5" junction box.

▶

x x x.	x x.	<b>01.</b>	<b>00.</b>	x x.	<b>Z80.</b>	x
--------	------	------------	------------	------	-------------	---

**Complete order number**

Input voltage for all external power supply units and canopy is **120 / 277 VAC 50/60 Hz**



Luminaire can be tilted to the desired position by adjusting the counterweight knurled-screw.