







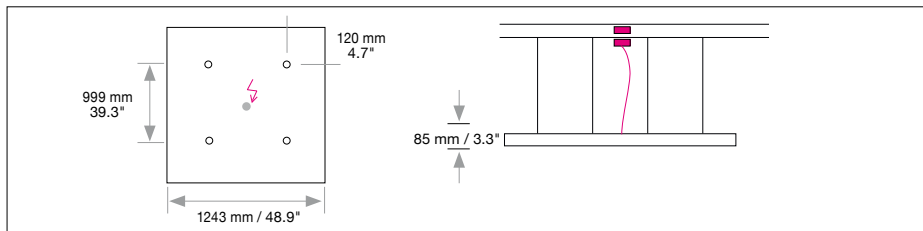

SKY


Housing: Aluminum profile frame, powder-coated in white with translucent foil (fire rating B1)
 Design: SATTLER

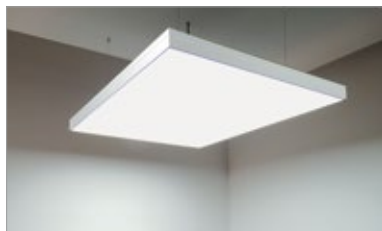


Size	Size: L x W x H mm	inches	LED Watt	Lumen ¹⁾	weight kg ²⁾ / lbs ²⁾	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
	LED full area 1243 x 1243 x 85	48.9 x 48.9 x 3.3"	175	16,500	28 / 61.7	182.	x x.	x x.	x x.	x x.	x x x.	x
	LED circumferential 1243 x 1243 x 85	48.9 x 48.9 x 3.3"	116	6,528	28 / 61.7	183.	x x.	x x.	x x.	x x.	x x x.	x
LED 24V CRI > 80		Neutral-white Cold-white Warm-white Extra warm-white Extra warm-white Tunable white*	4000 K 5000 K 3000 K 2700 K 2200 K 2700 - 6500 K	(Standard) (Optional) (Optional) (Optional) (Optional) (Optional)	x x x. x x x. x x x. x x x. x x x. x x x.	40. 50. 30. 27. 22. 65.	x x. x x. x x. x x. x x. x x.	x x. x x. x x. x x. x x. x x.	x x. x x. x x. x x. x x. x x.	x x x. x x x. x x x. x x x. x x x. x x x.	x x x x x x	
Dimming		Dimmable 0 - 10 V DMX LUTRON (contact factory)		(Standard) (Optional) (Optional)	x x x. x x x. x x x.	x x. x x. x x.	51. 31. 71.	00. 00. 00.	x x. x x. x x.	x x x. x x x. x x x.	x x x	
Finishes (Standard)	 11 white				x x x.	x x.	x x.	x x.	11	x x x.	x	
Power Supply Cable (Standard)	 Z 70 Silver				x x x.	x x.	x x.	x x.	.	Z70	x	

SKY


Housing: Aluminum profile frame, powder-coated in white with translucent foil (fire rating B1)
 Design: SATTLER

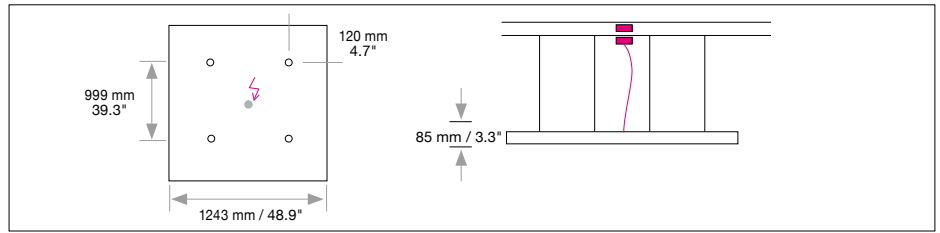

Mounting Version



4 point suspension with canopy in suspended ceiling



4 point suspension with canopy

B = Distance of external power supply unit to light fixture max. 10m / 394"

Including steel cable suspension 5000mm / 197"
 and power supply cable 5000mm / 197"

Dimensions of canopy			For use with Mounting Version
Typ	Size mm / inch body / H		
(body white)	DBS 300 Ø 300 / 50mm / 11.8 / 1.9"	B	

USA/Canada: Canopy mounts to 4" octagonal junction box.

Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
----------	-----	---------	-----	----------	--------------------	------------------

X X X.	X X.	X X.	X X.	11.	Z70	B
--------	------	------	------	------------	------------	----------

Complete order number

Input voltage for all external power supply units and canopy is
120 / 277 VAC 50/60 Hz