


# ROTOLO SELECTON

Housing: Circular aluminium profile with integrated acrylic diffusor downwards  
 Design: SATTLER

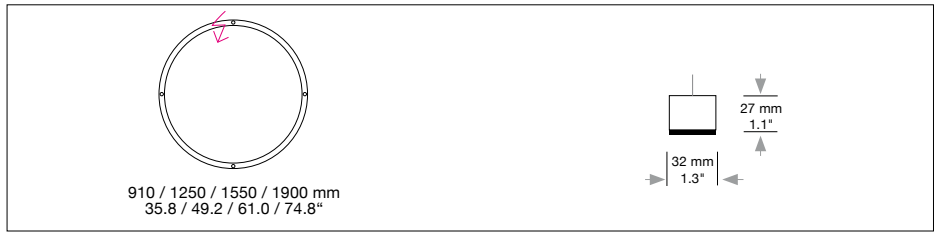

Size: Ø mm	inches	LED Watt	Lumen <sup>1)</sup>	weight kg <sup>2)</sup> / lbs <sup>2)</sup>	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
<b>Sizes</b>	Ø 910 mm Ø 1250 mm Ø 1550 mm Ø 1900 mm	35.8" 49.2" 61.0" 74.8"	55 72 82 88	3.450 4.131 5.559 5.966	3,8 / 8.4 5,2 / 11.5 6,5 / 14.3 8,0 / 17.6	<b>1000.</b> <b>1001.</b> <b>1011.</b> <b>1012.</b>	x x . x x . x x . x x .	x x . x x . x x . x x .	x x . x x . x x . x x .	x x x . x x x . x x x . x x x .	x x x x
<b>LED</b> 24V CRI > 90		<b>Neutral-white</b> <b>Warm-white</b> <b>Extra warm-white</b>	<b>4000 K</b> <b>3000 K</b> <b>2700 K</b>	<b>(Standard)</b> <b>(Optional)</b> <b>(Optional)</b>	x x x . x x x . x x x .	<b>40.</b> <b>30.</b> <b>27.</b>	x x . x x . x x .	x x . x x . x x .	x x . x x . x x .	x x x . x x x . x x x .	x x x
<b>Dimming</b>		<b>Dimmable 0 - 10 V</b>		<b>(Standard)</b>	x x x .	x x .	<b>51.</b> <b>00.</b>	x x . x x .	x x . x x .	x x x . x x x .	x x
<b>Finishes</b>	 (Standard) <b>11</b> white	(Optional) <b>30</b> anthracite			x x x .	x x .	x x .	x x .		x x x .	x
<b>Power Supply Cable</b>		 <b>Z 70</b> Silver			x x x .	x x .	x x .	x x .	x x .	<b>Z70.</b>	x
<b>Mounting Version</b>		 4 point suspension with canopy or canopy in suspended ceiling	 Direct ceiling mounting (white) 50mm / 1.9" with canopy	<b>Standard</b>  <b>Optional</b>	x x x .  x x x .	x x .  x x .	x x .  x x .	x x .  x x .	x x .  x x .	x x x .  x x x .	<b>B.</b>  <b>H.</b>
<b>Dimensions of canopy</b>		 Typ Size mm / inch body / H <b>DBS 250</b> Ø 250 / 50 mm / 9.8 / 1.9"	For use with Mounting Version <b>B, H</b>	USA/Canada: Canopy mounts to 4" octagonal junction box.						<b>Z70.</b>	x

Order number

Distance of external power supply unit to light fixture **max. 10m / 394"**.  
**Mounting version with steel cable length 3000 mm / 196" and power supply cable, length 3000 mm / 196"**  
 Input voltage for all external power supply units and canopy is **90-277 VAC 47-63 Hz**

7.12.17 ROTOLO SELECTION



410 381 1497 answers@inter-lux.com  
 inter-lux reserves the right to make technical changes without notice



Light distribution direct



Conforms to UL-STD 1598  
 Certified to CSA-STD C22.2  
 No.250.0-08

1) Net lumen output: Losses due to diffusers and reflectors are considered.  
 Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit.  
 2) Weight of lights without remote technical unit or canopy.