


SLIM WALL

Housing: Wall lamp with indirect light distribution.
Circular aluminum profile with integrated acrylic.
Design: SATTLER

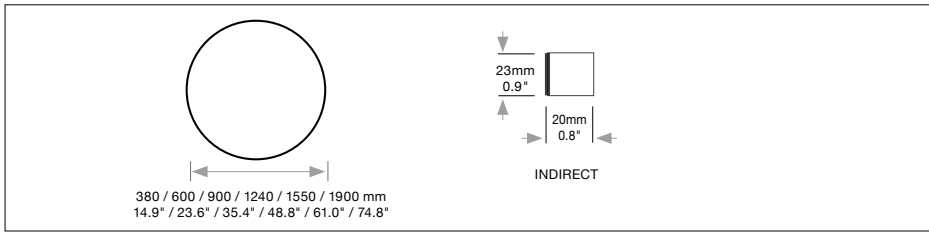


Size: Ø mm	inches	LED Watt	Lumen ¹⁾	weight kg ²⁾ / lbs ²⁾	Item No.	LED	Dimming	LED	Finishes	Power Supply cable	Mounting Version
Sizes											
Ø 380 mm	14.9"	9	456	1.0 / 2.2	727.	x x.	x x.	x x.	x x.	x x x.	x x
Ø 600 mm	23.6"	14	789	1.0 / 2.2	728.	x x.	x x.	x x.	x x.	x x x.	x x
Ø 900 mm	35.4"	23	1,149	1.5 / 3.3	729.	x x.	x x.	x x.	x x.	x x x.	x x
Ø 1240 mm	48.8"	30	1,347	2.5 / 5.5	730.	x x.	x x.	x x.	x x.	x x x.	x x
Ø 1550 mm	61.0"	39	1,905	3.0 / 6.6	731.	x x.	x x.	x x.	x x.	x x x.	x x
Ø 1900 mm	74.8"	46	2,289	3.5 / 7.7	732.	x x.	x x.	x x.	x x.	x x x.	x x
LED 24V CRI > 90 *CRI > 80		Warm-white	3000 K	(Standard)	x x x.	30.	x x.	x x.	x x.	x x x.	x x
		Neutral-white	4000 K	(Optional)	x x x.	40.	x x.	x x.	x x.	x x x.	x x
		Extra warm-white	2700 K	(Optional)	x x x.	27.	x x.	x x.	x x.	x x x.	x x
		Extra warm-white	2200 K*	(Optional)	x x x.	22.	x x.	x x.	x x.	x x x.	x x
Dimming		Dimmable 0 - 10 V		(Standard)	x x x.	x x.	51.	00.	x x.	x x x.	x W
		DMX		(Optional)	x x x.	x x.	31.	00.	x x.	x x x.	x W
		LUTRON (contact factory)		(Optional)	x x x.	x x.	71.	00.	x x.	x x x.	x W
Finishes											
(Standard)		12	White, powder coated, similar RAL 9003								
	Optional (Powder coated):		11 White, similar RAL 9010		10 Black fine textured		30 Anthracite fine textured		32 Crocodile black		33 Sand silver fine textured
			34 Bronze satined		35 Gold		36 Brass		37 Bronze fine textured		38 Copper
	Optional (Premium)		22 Polished Aluminium		27 Brushed Aluminium		XX Custom finish				
Power Supply Cable (Standard)		Z 80	Matte black								
				Mounting W	x x x.	x x.	x x.	x x.	x x.	Z80.	x x

1) Net lumen output: Losses due to diffusers and reflectors are considered.
Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit.
2) Weight of lights without remote technical unit or canopy.


SLIM WALL

Housing: Wall lamp with indirect light distribution.
Circular aluminum profile with integrated acrylic.
Design: SATTLER

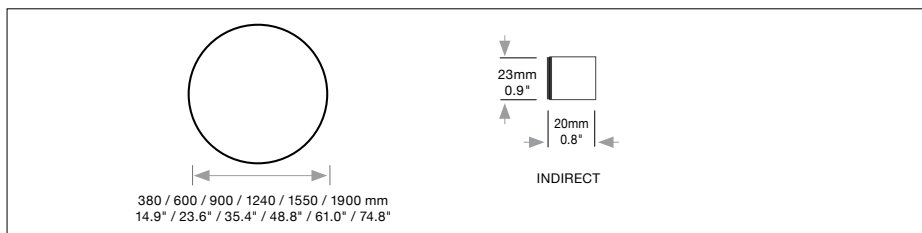


Mounting Version

1) Select a bracket:




K Wall bracket
85 mm / 3.3"
(white)




(Standard)

Item No.	LED	Dimming	Finishes	Power Supply cable	Mounting Version
x x x.	x x.	x x. x x.	x x.	x x x.	K x
x x x.	x x.	x x. x x.	x x.	x x x.	J x
x x x.	x x.	x x. x x.	x x.	x x x.	x W




J Wall bracket
115 mm / 4.5"
(white)



(Optional)

W Remote power supply



(Standard)


2) Select a driver:

x x x.	x x.	x x. 00.	x x.	Z80	x W
--------	------	----------	------	------------	------------

Wall brackets in white. Available as a custom in polished aluminum

Complete order number

W = Distance of external power supply unit to light fixture max. 4m / 157".

Dimensions of external power supply units				
Type	Size mm / inch			For use with
	L	W	H	Mounting Version
	DE 1F	360 x 150 x	85 mm / 14.2 x	5.9 x 3.3" W

Input voltage for all external power supply units and canopy is **120 / 277 VAC 50/60 Hz**