



AVVENI PENDANT 18

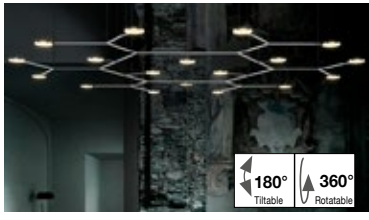


Product-information: Aluminum structure with eighteen light heads. Each light head can be taken off and is fully adjustable through a magnetic hinge system. Light heads are available as flood or spot versions (lenses with 24 and 38 degrees). Cable suspensions are adjustable.

Design: Ulrich Sattler | Michael Schmidt, Code2design

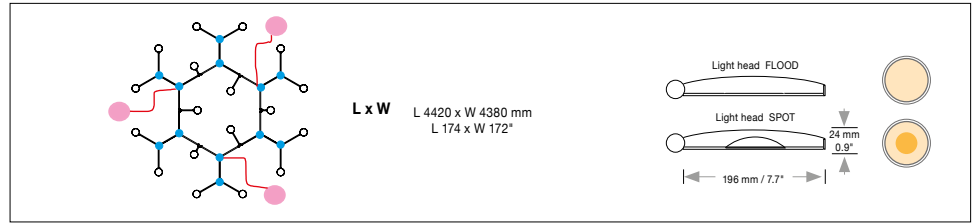

STRUCTURE

Type	L / W mm	L / W inches	LED Watt	weight kg ²⁾ / lbs ²⁾	STRUCTURE				
					Type No.	Finish 1	DIM.	Power Supply Cable	Mounting Version
	L 4420 / W 4380 mm	L 174.0 / W 172.0"	max. 225 W	20.0 / 44.1	1156.	XX.	XX.	XX.	XX.
Finish 1 Structure	standard	standard	premium	Standard	XXXX.	12	XX.	XX.	XX.
	12 white matte RAL 9003	14 black matte	22 Aluminum polished						
Dimming		0-10 V		Standard	XXXX.	XX.	05	XX.	XX.
Cable	power supply cables, silver 196.9" (5000mm)			Standard	XXXX.	XX.	XX.	70	XX.
Mounting Version					XXXX.	XX.	XX.	XX.	0x.





Straight suspensions, 3X canopies with 196.9" (5000mm) power cables. Canopies can be surface mounted below the ceiling or remote.

Ships in 3X pre-assembled 6-head sections

Order No. STRUCTURE

LIGHT HEAD

Type	Finish 2	Finish 3	LED		Type No.	Finish 2	Finish 3	Kelvin	Beam angle										
			Beam angle	Beam angle															
	XX.	XX.	XX	XX	01	XX.	XX.	XX	XX	XX	XX								
Finish 2 Light head outside ring	standard	standard	premium	Standard	XX.	12	XX.	XX	XX	XX	XX								
	12 white matte	62 (14) black matte	22 Aluminum polished									Premium	XX.	62	XX.	XX	XX	XX	
Finish 2 must be the same as finish 1																			
Finish 3 Light head top cover	standard	standard	standard	Standard	XX.	XX.	60	XX	XX	XX	XX								
	60 silver anodized	61 gold anodized	62 black anodized									XX.	XX.	61	XX	XX	XX		
												XX.	XX.	62	XX	XX	XX		
LED	Extra warm-white 2700 K			CRI >95	XX.	XX.	XX.	27	XX.	XX	XX								
	Warm-white 3000 K											XX.	XX.	XX.	30	XX.	XX	XX	
	Neutral-white 4000 K											XX.	XX.	XX.	40	XX.	XX	XX	
Beam Angle	FLOOD 78°		18x12.5 W 1282' Lumen		Standard	XX.	XX.	XX.	XX	99	00	00							
	SPOT 24°		12.5 W 1229' Lumen										XX.	XX.	XX.	XX	24	00	00
	SPOT 38°		12.5 W 1229' Lumen										XX.	XX.	XX.	XX	38	00	00



Quantity Order No. LIGHT HEAD FLOOD

Quantity Order No. LIGHT HEAD SPOT

Flood and spot heads may be mixed within one structure

Input voltage for all external power supply units and canopies is 220-240 VAC 50-60 Hz