


SPILLA

Housing: Manufactured with fine porcelain of the Porzellan Manufaktur Nymphenburg Munich and designed by Joerg Krewinkel, SPILLA allows for particularly artful plays with light.
 Design: Joerg Krewinkel

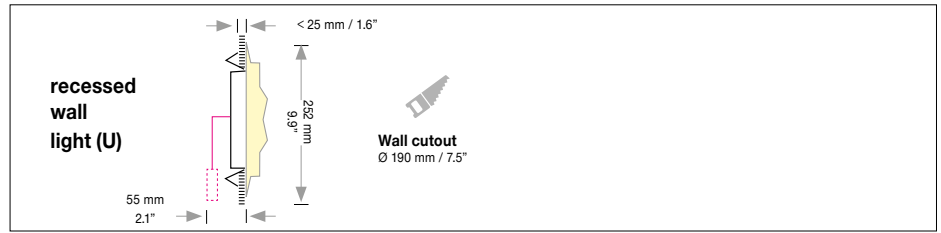

SIZE	Size Ø	inches	LED Watt	weight ² kg / lbs	STRUCTURE				
					Type No.	Finish 1	DIM.	Power Supply Cable	Mounting Version
	Ø 252 mm	9.9"	12 W	0.8 / 1.8	1570.	XX.	XX.	XX.	XX.
Finish 1	12 white matt RAL 9003				XXXX.	12.	XX.	XX.	XX.
Dimmer	0-10 V CASAMBI Each unit separately switch- and dimmable		Standard Optional		XXXX.	XX.	05. 08.	XX.	XX.
Power Supply Cable	without visible power supply cable				XXXX.	XX.	XX.	00.	XX.

Mounting Version

lamp with cavity box and external power supply unit in false wall

recessed wall light (U)

▶ 1570. 12. . . 00. 0U.

LIGHT HEAD

Type	Finish 2	Finish 3	LED		Kelvin	Beam angle			
			05.	XX.	XX.	XX.	XX.	XX.	XX.
Finish 2	56 white biscuit porcelain	In cooperation with: PORZELLAN MANUFAKTUR NYMPHENBURG, Munich		XX.	56.	XX.	XX.	XX.	XX.
				XX.	XX.	00.	XX.	XX.	XX.
LED	36V	Color temperature is influenced by porcelain, there is no choice of the color temperature		XX.	XX.	XX.	40.	XX.	XX.
Beam Angle	FLOOD			XX.	XX.	XX.	XX.	98.	00.00.

Power Supplies
for connection of one or multiple lamps

Power supply not included, has to be order separately.

Power supply 1 light
Power supply unit up to 7 lights
Power supply unit up to 14 lights

Type No.
306.00.00.00.00
307.00.00.00.00
308.00.00.00.00

Order No. LIGHT HEAD **▶ 05. 56. 00. 40. 98. 00. 00.**

Order No. Power supplies **▶ 00. 00. 00. 00.**

Input voltage for all external power supply units and canopies is 120 - 277 VAC / 50/60 Hz



410 381 1497 answers@inter-lux.com
inter-lux reserves the right to make technical changes without notice



Light distribution direct



Conforms to UL-STD 1598
Certified to CSA-STD C22.2
No.250-0-08

Technical data is subject to change. Errors and omissions excepted *Net lumen output: Losses due to diffusers and reflectors are considered. Lumen values refer to an ambient temperature of max. 35° Celsius / 95° Fahrenheit. *Weight of lights without remote technical unit or canopy.