





Built for longevity, stability and smooth operation
Durable polymer design in safety yellow for maximum visibility
Modular arms available in 24, 42 and 60 inch lengths

Dimensions

Wall Mounting Plate for
Single Strut Arms



Wall Mounting Plate for
Double Strut Arms

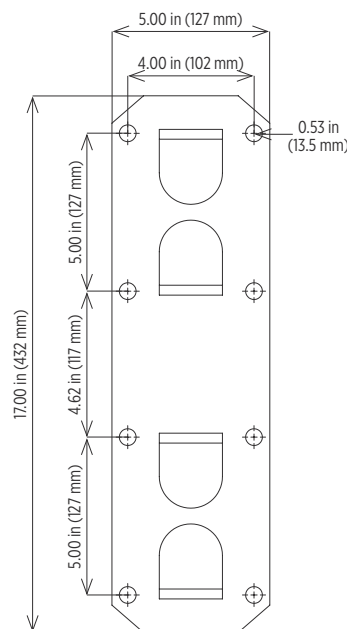

Compliances

- UL/cUL Listed to:
- UL 153 Portable Work Lights
Suitable for Dry Locations
 - Indoor (cUL)

Modular Head Specifications

Construction	High temperature polymer housing Zinc plated steel Wire Lamp Guard
Hardware	Zinc plated steel
Socket	Spring-loaded socket assembly
Light source	Accommodates up to 250W PAR 38/BR40 lamp Lamp optional (18W)
Wiring	Recessed 3-prong IEC (C-14) type plug
Mounting	Zinc plated harp
Warranty	3 years

Modular Arm Specifications

Construction	1.50 inch square steel tube arms with wrist-action, zinc plated steel joint on 42 and 60 inch single strut arms Washers at all joints and bushings at bracket joints 24, 42 and 60 inch single strut arms - standard 42 and 60 inch double strut arms available
Finish	Safety yellow thermoset powder coat
Hardware	Zinc plated
Wiring	120V only Wear-resistant 3 conductor AC cord Male plug on light head cord plugs in to female receptacle in arm On-off rocker switch and IEC type receptacle
Mounting	3/8 inch (5 mm) thick zinc plated steel mounting bracket Mounting plate: 3 x 5 inch - single strut arms 5 x 17 inch - double strut arms Recommended mounting height: 5 feet 10 inches (1.78 m) from the floor - single strut arms 6 feet 9 inches (2.06 m) from the floor - double strut arms
Warranty	3 years

Contact factory for IES files



This product complies with domestic preference requirements such as BAA or TAA.
For additional information, visit phoenixlighting.com or consult your representative.



Light Head




Includes a recessed 3-prong IEC (C-14) type plug which plugs directly into the receptacle of any single or double strut modular arm

Single Strut Arms


24 inch Arm Effective Reach



42 inch Arm Effective Reach

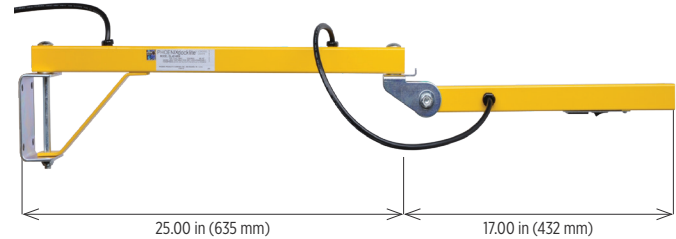


60 inch Arm Effective Reach

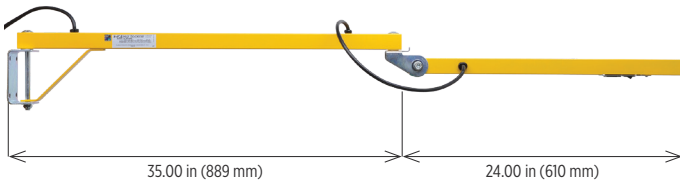


Double Strut Arms

42 inch Arm Effective Reach

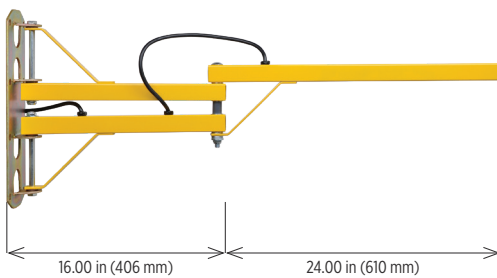

60 inch Arm Effective Reach

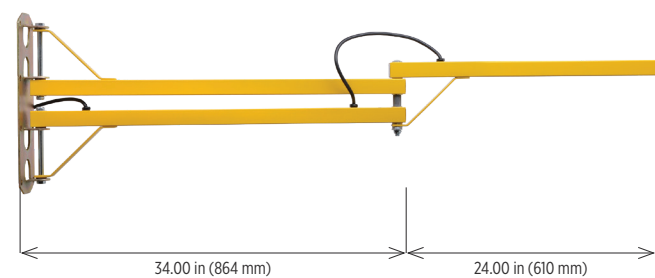

Ordering Information

Modular Head

Example: DL-INC-LH

Fixture	Wattage/Type	Part	Options
DL	INC	LH	LMP

Wattage/Type

INC Incandescent (PAR38/BR40)

Options

LMP PAR38 LED lamp (18W)

Modular Arm

Example: DL-24-ARM

Series	Length	Part	Options
DL	24 ¹	ARM	DS ²
	42 ¹		
	60 ¹		

Options

DS² Double strut arm

Notes

- 1 120V standard.
- 2 Available in 42 and 60 inch lengths only. DL-FAN-18 requires 42 or 60 inch Double Strut Arm.

Special Projects: We may be able to accommodate your special projects, so please don't hesitate to ask about additional options. Minimum order quantities and/or extended lead times will apply. Contact your Phoenix representative with specific inquiries.

Accessories (order separately)




Wire Lamp Guard

WG-S (included with modular head, INC only)



Polycarbonate Guard

PG-1



Fan

DL-FAN-18



Modular *docklite*

Head and Arms for Loading Dock Lighting

PHOENIX[®]
DURABILITY X DESIGN™

Product design and specifications are subject to change without notice. The most current version of this specification sheet can be found on our website: www.phoenixlighting.com.



Phoenix Lighting 8711 West Port Avenue Milwaukee, WI 53224 USA
Phone: +1 414.973.3300 Toll Free: 800.438.1214 Fax: +1 414.973.3210 www.phoenixlighting.com

N5610208S
09.23.21