

SOLID STATE AREA LIGHTING

DSC SERIES-LED

SPECIFICATIONS

LUMINAIRE

Upper housing is 0.125" thick formed aluminum. Lower housing is 0.080" thick formed aluminum. Threaded receiver accepts glass diffuser. Glass diffuser is heavy wall tempered prismatic glass available in clear prismatic or prismatic opal. Pendant Mount uses Trulevel ball coupling mount. Wall mount has integrated side mount extruded aluminum arm and cast aluminum wall plate. All hardware is stainless steel.

LED POWER ARRAY™

Three-dimensional array of individual LED Tubes fastened to a retaining plate. Each LED Tube consists of circuit board populated with a multiple of LED's and is mechanically fastened to a radial aluminum heat sink. An acrylic lens and end cap protects the LED Tube's internal components.

VERTICAL POWER ARRAY™: LED Tubes are aligned vertically and arranged radially to produce an even raw light distribution that simulates standard light sources. Produces a minimal glare, symmetric diffuse light distribution.

LED EMITTERS

High Output LED's are driven at 350mA for nominal 1 Watt output each. LED's are available in standard Neutral White (4000K), or optional Cool White (5000K) or Warm White (3000K). Consult Factory for other LED options.

LED DRIVER


UL and CUL recognized High Power Factor, Constant Current LED drivers operate on input voltages from 120-277VAC, 50/60hz. Consult Factory for 347-480VAC. Driver is mechanically fastened to a retaining bracket. Main power quick disconnect provided. Driver has a minimum 4KV of internal surge protection, 10KV & 20KV Surge Protector optional. Dimming and High-Low Driver options available.

FINISH

Polyester powder coat incorporates four step iron phosphate process to pretreat metal surface for maximum adhesion. Top coat is baked at 400°F for maximum hardness and exterior durability.


PROJECT NAME: _____

FIXTURE TYPE: _____

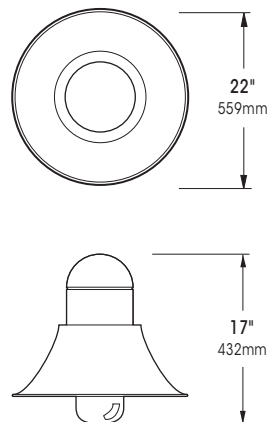

DSC 1-LED

PATENT PENDING



DSC 2-LED

PATENT PENDING




2016350


DSC SERIES - LED

S P E C I F I C A T I O N S

MOUNTING STYLES



XPD

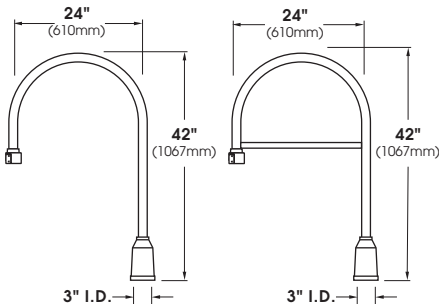


XPK

XPS

ARMS ARE HEAVY WALL EXTRUDED ALUMINUM CONSTRUCTION. FOR ADDITIONAL ARM OPTIONS SEE ARM SECTION.


WALL MOUNT

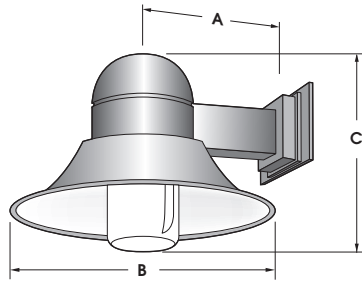


| FIXTURE | A | B | C |
|-------------|--------------|----------------|--------------|
| DSC1 | 14" 356mm | 22" 559mm | 17" 432mm |
| DSC2 | 13" 330mm | 14.5" 368mm | 16" 406mm |

EXTRUDED ALUMINUM ARM AND CAST ALUMINUM WALL BRACKET ASSEMBLY PROVIDED WITH BUILT IN GASKETED WIRE ACCESS FOR FIXTURE/SUPPLY WIRE CONNECTION.

WALL PLATE




LED POWER ARRAY™ MODULES




DSC1 E.P.A. = 0.78

Available in:
48 LED Module Max



VPA - Vertical Array Top Mount



DSC2 E.P.A. = 0.50

Available in:
36 LED Module Max

O R D E R I N G I N F O R M A T I O N

| LUMINAIRE-FITTER | OPTICS | # of LED's | COLOR | VOLTAGE | MOUNTING | FINISH | OPTIONS |
|--|--|---|---|--|---|--|--|
| LUMINAIRE | OPTICS | LED | | | MOUNTING | FINISH | OPTIONS |
| LUMINAIRE-FITTER | VERTICAL POWER ARRAY (SANDBLASTED OR OPAL LENS) | # of LEDs | COLOR | VOLTAGE | <input type="checkbox"/> XPK <input type="checkbox"/> XPS <input type="checkbox"/> XPD <input type="checkbox"/> 1 ● WALLMOUNT <input type="checkbox"/> WM ● | STANDARD TEXTURED FINISH | <input type="checkbox"/> STEM MOUNT + LENGTH(IN) (48" MAX) SM+L <input type="checkbox"/> CHAIN MOUNT + LENGTH(IN) (48" MAX) CM+L <input type="checkbox"/> DIMMABLE DRIVER(S) (0-10V) DIM <input type="checkbox"/> HIGH-LOW DIMMING FOR HARDWIRED SWITCHING OR NON-INTEGRATED MOTION SENSOR HLSW <input type="checkbox"/> PHOTO CELL + VOLTAGE (EXAMPLE: PC120V) PC+V <input type="checkbox"/> 10KV SURGE PROTECTOR 10SP <input type="checkbox"/> 20KV SURGE PROTECTOR (277V & 480V Only) 20SP |
| <input type="checkbox"/> DSC1-LED <input type="checkbox"/> DSC2-LED | <input type="checkbox"/> VPA - SYM | DSC1 <input type="checkbox"/> 48LED (53 Watts) <input type="checkbox"/> 36LED (41 Watts) <input type="checkbox"/> 24LED (28 Watts) DSC2 <input type="checkbox"/> 36LED (41 Watts) <input type="checkbox"/> 24LED (28 Watts) Wattages Are Max Input Watts | <input type="checkbox"/> NW (4000K)* *STANDARD <input type="checkbox"/> CW (5000K) <input type="checkbox"/> WW (3000K) OTHER LED COLORS AVAILABLE CONSULT FACTORY | <input type="checkbox"/> 120 <input type="checkbox"/> 208 <input type="checkbox"/> 240 <input type="checkbox"/> 277 <input type="checkbox"/> 347 <input type="checkbox"/> 480 | | <input type="checkbox"/> BLACK RAL-9005-T <input type="checkbox"/> WHITE RAL-9003-T <input type="checkbox"/> GREY RAL-7004-T <input type="checkbox"/> DARK BRONZE RAL-8019-T <input type="checkbox"/> GREEN RAL-6005-T | |