

LSW8-PL MERIDIAN





LSW8-PL-BLP

The **LSW8-PL** is an ideal solution for uniform spacing and light levels in the absence of a structure. Its small aperture effectively shields against glare while allowing for excellent forward projection with even illumination side to side. Pair with our LSW8 step/wall light for design continuity throughout your project.

Features include:


- 1.25 Watts and up to 123 lumens
- Cree XP-L® High Density LED
- 2700K (80 & 90 CRI) or 3000K (80 CRI), Amber or Blue
- Thermally Integrated® and Field Serviceable LED Module
- 12V Integral Driver, Dimmable to <10% typ.
- Compatible w/ 12V AC/DC ELV or MLV Transformers
- Solid Copper and Brass Construction

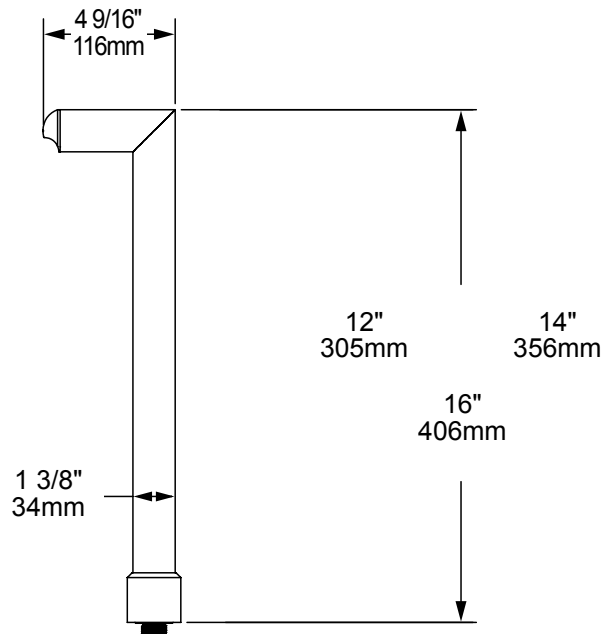



FIELD-INTERCHANGEABLE TECHNOLOGY

The FIT™ IP67 module is built on Auroralight's Copper Core Technology® platform and includes FIT™ Acrylic Optics.



Precision Machined Brass Body

Internal Driver and LED

Interchangeable UV & Shock Resistant Silicone Optic

COPPER CORE TECHNOLOGY®



12V

Powered by **CREE** LEDs



THERMALLY INTEGRATED

SEE NEXT PAGE FOR ORDERING INFORMATION



LSW8-PL MERIDIAN



ORDERING GUIDE: ^{Prefix} **LSW8-PL** L (LED) SW (STEP/WALL) 8 (8 X 1/8 INCHES) PL (PATH LIGHT)

INDICATES REQUIRED FIELD INDICATES OPTIONAL FIELD INCLUDED [_] QUICK SPEC (See Below)

QUICK SPEC SKU **LSW8-PL-BR-W-27-16-2GS-NAT**

LSW8-PL						
FACEPLATE ✓	OPTIC ✓	LED COLOR ✓	HEIGHT ✓	MOUNT	FINISH	
[BR] Brass [CU] Copper	[N] 15° Narrow [M] 25° Medium [W] 40° Wide [WF] 60° Wide Flood [A] All Optics	[27] 2700K, 80CRI [279] 2700K, 90CRI [30] 3000K, 80CRI [BLU] Blue [AMB] Amber (3W) (585-595nm) NOTE: For other CCT and CRI options, contact factory	[12] 12" [14] 14" [16] 16" [XX] Specify	[1/2] 1/2" Male Thread [2GS] Ground Stake w 2" Cap ✓ [3GS] Ground Stake w 3" Cap [325GS] Ground Stake w 3 1/4" Cap [DS] Deluxe Stake 9" [TR-12] 12" Trident Spike [PB-S] Power Box w/ Stake (Inc. 60W 120-12V transformer) [PM-60] 4" Pedestal Mount [SM3] 3 1/4" Surface Mount [SM2] 2 1/4" Surface Mount	Standard: [NAT] Natural ✓ Plus (\$): [BLP] Bronze Living Patina [BLP-XD] BLP Extra Dark	



LSW8-PL MERIDIAN

PHOTOMETRIC OVERVIEW

Information based on 40° Wide Optic. To download more in-depth IES photometric data, visit auroralight.com/product/lsw8-pl-meridian/

Mounting Height - 2 Feet

