

JOB NAME _____
 CONTACT _____
 ORDERING CODE _____



Z15 LED Canopy Spot Xicato

XICATO



DESCRIPTION

Z15 is a performance spot fixture in a par20 cylinder form factor integrated with industry best LEDs up to 1470lm. Z15 has many options for most applications and carries the first 5 Year NO COLOR SHIFT AND FIXTURE WARRANTY.

HOUSING

Extruded aluminum housing with white, matte chrome or black finish

MOUNTING

- Canopy over a 3-1/2" to 4" recessed octagonal junction box for MP mounting option.

LISTINGS

- ETLus Listed to UL1598 (suitable for dry and damp locations)
- cETL Listed to CSA C22.2 #250.0
- Made in the USA - meets the requirements of the Buy American provision within the ARRA

LED INFO

- XICATO XTM: SDCM = 1x2 MacAdam Ellipse, Duv +/- 0.001, Lumen Maintenance: L₉₀ > 55,000 hrs

XICATO XTM MODULE - ORDERING CODES

PART NUMBER	137420	
LED	XTM19	Xicato 19mm
DELIVERED LUMENS (3000K 83CRI SA20)	11LM	835 lm
	13LM	950 lm
	16LM	1160 lm
	20LM	1470 lm
CCT	27K	2700K
	B27K ²	27000K beauty
	30K	3000K
	V30K	3000K vibrant
	35K	3500K
	40K	4000K
CRI	83	83 CRI
	98 ^{1,2}	98 CRI
REFLECTOR & LUMEN MULTIPLIER	SSA20	20°, semi-specular (0.92)
	SSA40	40°, semi-specular (0.82)
	SSA60	60°, semi-specular (0.93)
	DA20	20°, diffused (0.86)
	DA40	40°, diffused (0.88)
	DA60	60°, diffused (0.89)
	SA20	20°, specular (1.00)
	SA40	40°, specular (1.00)
	SA60	60°, specular (0.99)
	(10° narrow beam angle, see page 2 for details)	
VOLTAGE	120 ³	120V
	UNV ⁴	120V-277V
DIMMING	ELV ^{3,6}	10% trailing edge dimming
	10V ⁴	standard 0-10V dimming to 10%
	See Dimming Availability Chart at the bottom of this page for details.	
FINISH	BK	black
	MC	matte chrome
	WH	white
MOUNTING OPTIONS	MP	monopoint canopy
STEM LENGTH	5 ⁴	5" stem
	2 ^{4,5}	28" stem
	48 ^{5,6}	48" stem
	60 ^{5,6}	60" stem
	72 ^{5,6}	72" stem
	96 ^{5,6}	96" stem
	120 ^{5,6}	120" stem
LITE OPTICS	CLR	standard snoot / lens
	CRO	corona ring / lens

ORDERING CODE

Follow the steps to specify your fixture, example:

137420 - XTM19 - 20LM - 35K - 83 - SSA20 - 120 - ELV - MC - MP - 28 - CLR

XTM19 (LED)	POWER		Dimming Availability
	DELIVERED LM	W (83 CRI)	
835	13	14	11LM 83 •
950	15	17	11LM 98 •
1160	16	18	13LM 83 • •
1470	18	N/A	13LM 98 •
			16LM 83 • •
			16LM 98 • •
			20LM 83 • •
			20LM 98 •

Power Factor ≥ 0.9

NOTES

- 20LM not available in 98CRI.
- B27K Beauty Series choose 98 CRI (actual 93). Available in 11LM with ELV dimming and 13LM with 10V dimming.
- ELV dimming only available in 120V.
- 0-10V dimming only available in UNV voltage & stem lengths of 5 and 28.
- Field cuttable to specific length; length may be specified in 1" increments at additional charge.
- Stem lengths of 48, 60, 72, 96 and 120 only available for ELV.

10° NARROW BEAM - ORDERING CODES

PART NUMBER	137420	
LED	XTM09	Xicato 9mm
DELIVERED LUMENS	12LM	900 lm
CCT	27K 30K 35K 40K	2700K 3000K 3500K 4000K
CRI	83	83 CRI
REFLECTOR	SA10	specular, 10°
VOLTAGE	120 ¹ UNV ²	120V 120V-277V
DIMMING	ELV ^{1,4} 10V ²	10% trailing edge dimming standard 0-10V dimming to 10%
FINISH	BK MC WH	black matte chrome white
MOUNTING OPTIONS	MP	monopoint canopy
STEM LENGTH	5 ² 28 ^{2,3} 48 ^{3,4} 60 ^{3,4} 72 ^{3,4} 96 ^{3,4} 120 ^{3,4}	5" stem 28" stem 48" stem 60" stem 72" stem 96" stem 120" stem
LITE OPTICS	CLR CRO	standard snoot / lens corona ring / lens

ORDERING CODE

Follow the steps to specify your fixture, example:
137420 - XTM09 - 12LM - 35K - 83 - SA10 - 120 - ELV - BK - MP - 28 - CLR

XTM09 (LED)	POWER
DELIVERED LM	W (83 CRI)
900	16

Power Factor ≥ 0.9

- NOTES**
- 1 ELV dimming only available in 120V.
 - 2 0-10V dimming only available in UNV voltage & stem lengths of 5 and 28.
 - 3 Field cuttable to specific length; length may be specified in 1" increments at additional charge.
 - 4 Stem lengths of 48, 60, 72, 96 and 120 only available for ELV.


MOUNTING OPTIONS

Mounting Options


MP monopoint canopy

H


- 5 5" stem
- 28 28" stem (field adjustable to 6")
- 48 48" stem (field adjustable to 6")
- 60 60" stem (field adjustable to 6")
- 72 72" stem (field adjustable to 6")
- 96 96" stem (field adjustable to 54")
- 120 120" stem (field adjustable to 66")

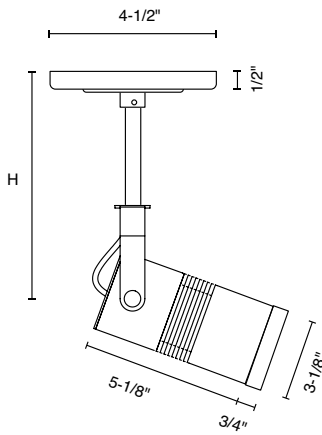

ELV WITH CRO
STEM LENGTHS OF 5 AND 28

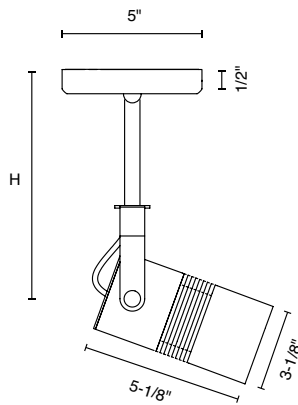

ELV
STEM LENGTHS OF 48 THRU 120

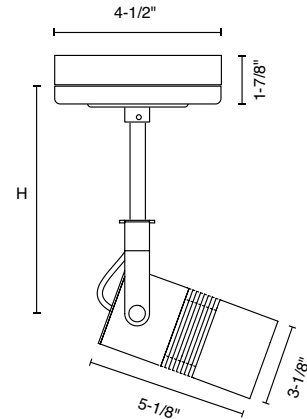

10V
STEM LENGTHS OF 5 AND 28

ACCESSORIES

- 900300bk Snoot, black
- 900300mc Snoot, matte chrome
- 900300wh Snoot, white
- 900310 Louver, black
- 900305bk¹ Barn doors, black
- 900321 Diffuser lens
- 900322 Frosted lens
- 900320 Linear lens

Notes

1. Barn Doors Requires 900300 Snoot Accessory.



*shown with no accessory



Snoot



Louver



Barn Doors



900321

900322

900320

Lens Options