


Model: _____ Date: _____
Accessories: _____
Job Name: _____ Type: _____

T Series INDOOR THERMOPLASTIC ROUND


- Constructed of impact-resistant, UL 94 V-0 thermoplastic
- Compatible with PMC and P series remote mounting plates

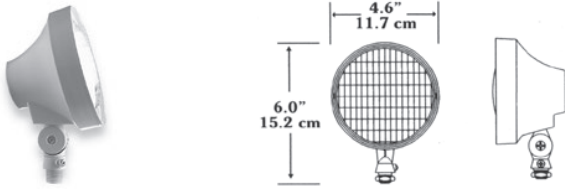

T SERIES	VOLTAGE	WATTAGE	CATALOG NO.	
			THERMOPLASTIC	
			WHITE	BLACK
TUNGSTEN	6 VOLT	7	T0607W	T0607B
		9	T0609W	T0609B
	12 VOLT	9	T1209W	T1209B
		12	T1212W	T1212B
	24 VOLT	18	T1218W	T1218B
		9	T2409W	T2409B
HALOGEN	6 VOLT	8	T06H08W	T06H08B
		10	T06H10W	T06H10B
		12	T06H12W	T06H12B
	12 VOLT	12	T12H12W	T12H12B

P Series INDOOR THERMOPLASTIC SQUARE


- Constructed of impact-resistant, UL 94 V-0 thermoplastic
- Compatible with PMC and P series remote mounting plates

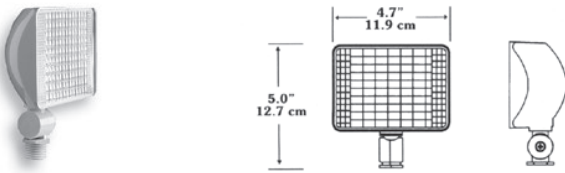

P SERIES	VOLTAGE	WATTAGE	CATALOG NO.	
			POLYCARBONATE	
			WHITE	BLACK
TUNGSTEN	6 VOLT	7	P0607W	P0607B
		9	P0609W	P0609B
	12 VOLT	9	P1209W	P1209B
		12	P1212W	P1212B
	18	18	P1218W	P1218B

R Series INDOOR THERMOPLASTIC SEALED BEAM PAR36


- Constructed of impact-resistant, UL 94 V-0 thermoplastic
- Compatible with PMC and P series remote mounting plates

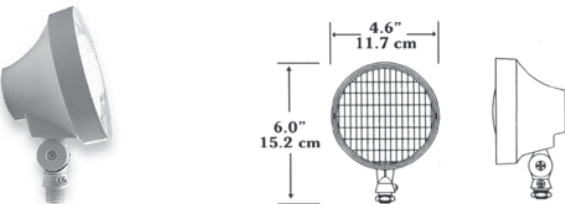

R SERIES	VOLTAGE	WATTAGE	CATALOG NO.	
			THERMOPLASTIC	
			WHITE	BLACK
TUNGSTEN	6 VOLT	18	R0618W	R0618B
		25	R0625W	R0625B
	12 VOLT	12	R1212W	R1212B
		18	R1218W	R1218B
	25	18	R1225W	R1225B
		25	R1225W	R1225B
HALOGEN	6 VOLT	8	R06H08W	R06H08B
		12	R06H12W	R06H12B
	12 VOLT	8	R12H08W	R12H08B
		12	R12H12W	R12H12B
	25	12	R12H25W	R12H25B

S Series INDOOR METAL/CHROME SEALED BEAM PAR36


- Meets City of Chicago emergency requirements
- Constructed of impact-resistant, chrome plated or powder coated steel
- Compatible with SP and PMC series remote mounting plates

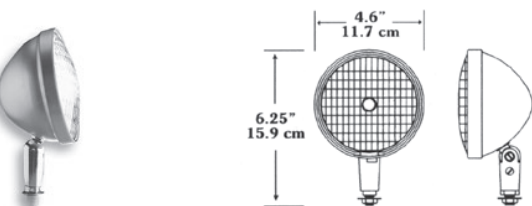

S SERIES	VOLTAGE	WATTAGE	CATALOG NO.		
			METAL & CHROME		
			WHITE	BLACK	CHROME
TUNGSTEN	6 VOLT	18	S0618W	S0618B	S0618M
		25	S0625W	S0625B	S0625M
		30	S0630W	S0630B	S0630M
	12 VOLT	12	S1212W	S1212B	S1212M
		18	S1218W	S1218B	S1218M
		25	S1225W	S1225B	S1225M
HALOGEN	6 VOLT	8	S06H08W	S06H08B	S06H08M
		12	S06H12W	S06H12B	S06H12M
		8	S12H08W	S12H08B	S12H08M
	12 VOLT	12	S12H12W	S12H12B	S12H12M
		25	S12H25W	S12H25B	S12H25M
		35	S12H35W	S12H35B	S12H35M
	50	S12H50W	S12H50B	S12H50M	

Z Series WET LOCATION THERMOPLASTIC
SEALED BEAM PAR36

- NEMA 4X rated sealed beam PAR36
- Constructed of gray polycarbonate
- Compatible with PMC series remote mounting plates



			CATALOG NO.		
			NEMA RATED		
Z SERIES	VOLTAGE	WATTAGE	WHITE	BLACK	GRAY
TUNGSTEN	6 VOLT	18	Z0618W	Z0618B	Z0618G
		25	Z0625W	Z0625B	Z0625G
		30	Z0630W	Z0630B	Z0630G
	12 VOLT	12	Z1212W	Z1212B	Z1212G
		18	Z1218W	Z1218B	Z1218G
		25	Z1225W	Z1225B	Z1225G
HALOGEN	6 VOLT	8	Z06H08W	Z06H08B	Z06H08G
		12	Z06H12W	Z06H12B	Z06H12G
	12 VOLT	8	Z12H08W	Z12H08B	Z12H08G
		12	Z12H12W	Z12H12B	Z12H12G
		25	Z12H25W	Z12H25B	Z12H25G

Specifications are subject to change without notice.
Installation must be performed in accordance with
Barron Lighting Group installation instructions.

10800110 Rev 8 01/19