# **SPECIFICATIONS**

### **DESCRIPTION:**

Adjustable MR16 accent fixture with integral transformer. Suitable for wet/damp/dry location installations.

#### MATERIAL:

Standard overall material is 6061 aluminum. HL-1380 - Machined Aluminum

#### FINISH:

AA - Anodized Satin Aluminum AP - Powder Coat Aluminum BK - Powder Coat Black

BZ - Powder Coat Bronze

WT - Powder Coat White

#### HALOGEN LAMPING OPTION:

Lamp Type - 12V halogen MR16 lamp, bi-pin GX5.3 base, 50W max, not included (standard).

#### **LED OPTIONS**

Integral high output LED, warm white 85 CRI (3000K CCT) standard, others available.

3LED - 3W LED - 180 lumens

8LED - 8W LED - 300 lumens

8LED-E - 8.4W LED - 565 lumens

#### **OPTICS**

3LED and 8LED:

SP - Spot. 12°

NF - Narrow Flood, 24°

FL - Flood, 36°

8I FD-F

SP - Spot 14°

NF - Narrow Flood, 25° **MF** - Medium Flood, 30°

FL - Flood, 40°

### **VOLTAGE:**

120 - 120/12 VAC integral potted magnetic transformer, LED/halogen. 277 - 277/12 VAC integral potted magnetic

# transformer, LED/halogen.

**MOUNTING:** Fixture is designed with a 1/2-NPS adjustable mounting stem.

# **OPTIONS:**

Glare shields

GL-10 - Short Angled, aluminum

GL-11 - Angled, aluminum

GL-13 - Straight, aluminum Lenses/Louvers/Color Filters

LA-1 - Hexcell Louver (Black) LA-2 - Prismatic lens

LA-3 - Linear spread lens

LA-4 - Soft focus lens (diffused)

LA-5 - Moonlight lens

LA-6 - Blue lens

See fixture accessories for more information.


### **SAMPLE ORDER SPECIFICATION:**

HL-1380-AA-120-GL-10-LA-2

## RATING:

Wet/damp/dry location.



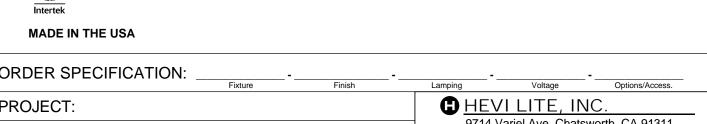



[57]

4 9/16"

[116]

5 7/8"

[149]

