

PROJECT NAME:

TYPE:

NOTES:

IK10 PLUS HIGH LUMEN SERIES

HIGH-BAY LED LUMINAIRE SPECIALIZING IN HIGH-ABUSE APPLICATIONS. INTENDED FOR GYMNASIUMS, NATATORIUMS, MANUFACTURING AND INDUSTRIAL FACILITIES, WAREHOUSES, CONVENTION CENTERS AND OTHER HIGH-CEILING APPLICATIONS.

OPTICS:

- WIDE 120° BEAM ANGLE FOR MAXIMUM UNIFORMITY
- DIFFUSE LENSING AVAILABLE IN CLEAR AND WHITE
- OPTIONAL POLYCARBONATE OR ACRYLIC LENSES
- WRAP-AROUND LENS OFFERS UP TO 10% UPLIGHT
- LED BARS ARE ROTATABLE FOR CUSTOM LIGHT DISTRIBUTION
- OPTIONAL NARROW REFLECTOR FOR AISLE APPLICATIONS

MECHANICAL:

- EXCEEDS IMPACT RATING OF IK10
- EXTRUDED ALUMINUM CONSTRUCTION
- STAINLESS STEEL HARDWARE
- ISOLATED DRIVER CHANNELS
- THERMALLY INDEPENDENT HEAT SINK LED BARS
- BRIGHT DIP ANODIZED FOR CORROSION RESISTANCE
- AMBIENT TEMPERATURE RATING:
-40°F TO 150°F, -40°C TO 65.5°C

COMPONENTS:

- HIGH-OUTPUT SAMSUNG LED CHIPS
- HIGH-TEMP OSRAM DRIVERS

INSTALLATION:

- AIRCRAFT CABLE SUSPENSION
- SURFACE MOUNTING
- RIGID PENDANT
- CUSTOM MOUNTS AVAILABLE, CONTACT FACTORY



PERFORMANCE:

- 98,732 NOMINAL LUMENS (5000K, NO LENS)
- 659 WATTS
- 149 LUMENS PER WATT
- TM-21: L₇₀ >72,000 HOURS
- CALCULATED L₇₀ >147,000 HOURS SPACING

ELECTRICAL:

- 120-277VAC STANDARD / 347-480VAC OPTIONAL
- 0-10V, 10% DIMMING DRIVERS STANDARD

WARRANTY:

- 10-YEAR WARRANTY ON FIXTURE BODY
- 5-YEAR WARRANTY ON ELECTRONICS
- FOR SPECIAL REQUESTS, CONTACT FACTORY

FIXTURE DIMENSIONS:

- 48" L x (24-36)" W x 2.5" H
- 24-30LBS SEE ASSEMBLY CONFIGURATIONS BELOW

LISTINGS AND RATINGS:

- UL 1598 FOR DRY, DAMP, WET, AND CANOPY LOCATIONS
- ARRA COMPLIANT (MADE IN AMERICA)
- IP 56 RATED
- UL EPH LISTED - NSF RATED
- DLC PREMIUM LISTED
- 3G VIBRATION RATING



LUX IK10P L 4 HO3 4'

MFR	SERIES	OUTPUT	NUMBER OF BARS	ELECTRONIC CHANNELS	ASSEMBLY CONFIG.	MODULE	CRI CCT	LENGTH	VOLTAGE DIMMING	LENS	NARROW OPTICS	CORD	CONTROLS	EMERGENCY BACKUP	CHANNEL ACCESS	BAR AIMING	FINISH	MOUNTING	APPLI-CATION	CUSTOM FIXTURE OUTPUT
LUX	IK10+	L-HIGH LUMEN	4	D -DOUBLE T -TRIPLE Q -QUAD	A B C D E F G PLACEMENT OF BARS/ CHANNELS IN FIXTURE BODY. SEE BELOW FOR OPTIONS.	HIGH OUTPUT GEN. 3	850 840 835 830	4'	120-277V U10 10% dim U1 1% dim UX no dimming 347-480V H10 10% dim H1 1% dim HX no dimming	NL CA4 WA4 CP4 WP4 SECONDARY NARROW OPTIC MAY BE USED ON SOME OR ALL BARS OF FIXTURE. IF MIXED DISTRIBUTION IS REQUIRED, PLEASE COORDINATE WITH FACTORY TO SPECIFY		3/10 4/10 5/10 6/10 WIRES 3 TO 6 LENGTH 10', 15', 20', 30'	DLH DAYLIGHT SENSOR OCC OCCUPANCY SENSOR D/O DAYLIGHT AND OCCUPANCY WCM WIRELESS CONTROL	EM 10 10W BATTERY EM 15 15W BATTERY	TOP BOT	DIR 0°NADIR IND 180°NADIR xxx/AIM FIELD-AIMABLE LED BARS CLD CUSTOM LIGHT DISTRIBUTION COORDINATE WITH FACTORY	STND MFHB CC END CAP CHANNEL LID HANGING BRACKETS BAR	CABLE: H10-18Y H10-18Y T H4P10 H4P10SS PENDANT: MH1P MH2P SPM SURFACE: SM UH2 UH4 SEE MOUNTING DETAILS (PG2) FOR AVAILABLE OPTIONS	ARCH AFH GEN GYM HNG ICE MFG NAT TC WHS	PLEASE NOTE DELIVERED LUMENS ABOVE

CRI PERFORMANCE DATA
80 CRI - STANDARD/NOMINAL
90 CRI - 6% LIGHT LOSS
OTHER CRI AVAILABLE, CONTACT FACTORY

CCT PERFORMANCE DATA
5000K - STANDARD/NOMINAL
4000K - 4% LIGHT LOSS
3500K - 6% LIGHT LOSS
3000K - 8% LIGHT LOSS
OTHER CCT AVAILABLE, CONTACT FACTORY

LENS PERFORMANCE DATA
NL (No Lens) - NOMINAL, NO LIGHT LOSS
CAx (CLEAR ACRYLIC) - 9% LIGHT LOSS
WAx (WHITE/FROSTED ACRYLIC) - 16% LIGHT LOSS
CPx (CLEAR POLYCARBONATE) - 14% LIGHT LOSS
WPx (WHITE/FROSTED POLYCARBONATE) - 22% LIGHT LOSS

CHANNEL AND ASSEMBLY CONFIGURATION:

DA		24"W, 24LBS
DB		24"W, 24LBS
DC		24"W, 24LBS
TA		30"W, 30LBS
TB		30"W, 30LBS
TC		30"W, 30LBS

CUSTOM CONFIGURATIONS AVAILABLE, CONTACT FACTORY

CORD DATA
3 WIRE - SINGLE LEG ON/OFF SWITCH
4 WIRE - DUAL LEG SWITCH, OR SINGLE SWITCH WITH EMERGENCY BATTERY
5 WIRE - SINGLE LEG SWITCH WITH DIMMING
6 WIRE - DUAL LEG SWITCH WITH DIMMING OR SINGLE SWITCH WITH EMERGENCY BATTERY

APPLICATION TYPE:
ARCH - ARCHITECTURAL
AFH - ARENA/FIELDHOUSE
GEN - GENERAL
GYM - GYMNASIUM
HNG - HANGAR
ICE - ICE RINK
MFG - MANUFACTURING
NAT - NATATORIUM
TC - TENNIS COURT
WHS - WAREHOUSE

FIXTURE "FINISH" DETAILS
STND-STANDARD:
-LUX GREEN HANGING BRACKETS
-BRIGHT DIP ANODIZED EXTRUSIONS
-QUALIFIES AS NATATORIUM RATED
-IF INSTALLED IN A NATATORIUM, LUX RECOMMENDS STAINLESS STEEL MOUNTS.
MFHB-HANGING BRACKETS:
-MILL FINISH HANGING BRACKETS
-BRIGHT DIP ANODIZED EXTRUSIONS

CHANNEL ACCESS
TOP - FIXTURE CHANNEL ACCESSIBLE FROM ABOVE, NOT AVAILABLE ON SURFACE MOUNTS.
BOTTOM - FIXTURE CHANNEL ACCESSIBLE FROM BELOW.

CC-CUSTOM COLOR:
-2MIL NATATORIUM-GRADE POWDERCOATED COMPONENTS IN ANY COLOR.
-PLEASE SPECIFY RAL NUMBER AND COMPONENTS TO BE FINISHED WHEN ORDERING.

PHOTOMETRIC DATA

LUX-IK10P-L-4-DA-HO3-850-4-U10-CA4

LUMEN OUTPUT TABLE


80+ CRI STANDARD

Lens	5000K	4000K	3500K	3000K
NL (No Lens)	98,732	94,783	92,808	90,833
CAx (Clear Acrylic)	89,846	86,252	84,455	82,658
WAX (White Acrylic)	82,935	79,617	77,959	76,300
CPx (Clear Polycarbonate)	84,910	81,513	79,815	78,117
WPx (White Polycarbonate)	77,011	73,931	72,390	70,850

ZONAL LUMEN SUMMARY

Zone	Lumens	%Fixt
0-20	11,368	12.50%
0-30	23,962	26.40%
0-40	38,652	42.60%
0-60	67,277	74.10%
0-80	85,105	93.80%
0-90	86,682	95.50%
10-90	83,748	92.30%
20-40	27,284	30.10%
20-50	41,959	46.20%
40-70	40,111	44.20%
60-80	17,828	19.60%
70-80	6,342	7.00%
80-90	1,576	1.70%
90-110	654	0.70%
90-120	1,183	1.30%
90-130	1,930	2.10%
90-150	3,400	3.70%
90-180	4,087	4.50%
110-180	3,433	3.80%
0-180	90,768	100.00%

POLAR CANDELA GRAPH

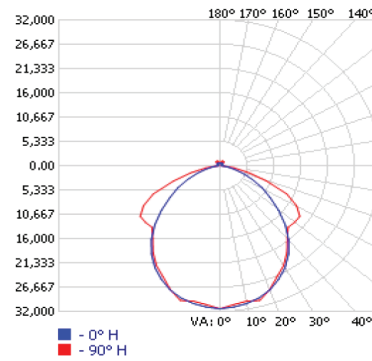

LEGEND:


MAXIMUM CANDELA = 31406
 LOCATED AT:
 HORIZONTAL ANGLE = 0,
 VERTICAL ANGLE = 0

#1: VERTICAL PLANE
 THROUGH HORIZONTAL
 ANGLES (0 - 180)
 (THROUGH MAX. CD.)

#2: VERTICAL PLANE
 THROUGH HORIZONTAL
 ANGLES (90 - 270)

#3: HORIZONTAL CONE
 THROUGH VERTICAL ANGLE
 (0) (THROUGH MAX. CD.)

LCS GRAPH

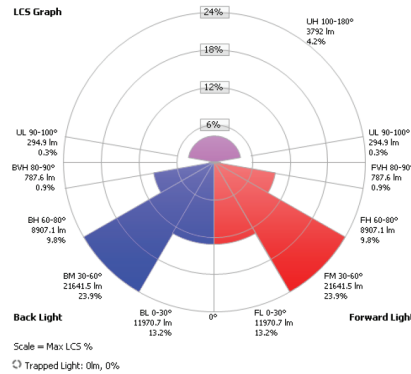

FRONT:
 LOW=11981.2
 MEDIUM=21657.3
 HIGH=8914.0
 VERY HIGH=788.2

BACK:
 LOW=11981.2
 MEDIUM=21657.3
 HIGH=8914.0
 VERY HIGH=788.2

UPLIGHT:
 LOW=294.9
 HIGH=3791.7

BUG RATING:
 B5-U5-G5

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

EFFECTIVE FLOOR CAVITY REFLECTANCE: 20%

RC	80				70				50			40			10			0
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	1.18	1.18	1.18	1.18	1.15	1.15	1.15	1.15	1.09	1.09	1.09	1.03	1.03	1.03	.98	.98	.98	.95
1	1.08	1.03	.99	.95	1.04	1.00	.96	.93	.95	.92	.89	.90	.88	.85	.86	.84	.82	.80
2	.98	.89	.83	.77	.95	.87	.81	.76	.83	.78	.73	.79	.75	.71	.75	.72	.69	.66
3	.89	.78	.70	.64	.86	.76	.69	.63	.73	.66	.61	.69	.64	.59	.66	.62	.58	.55
4	.81	.69	.61	.54	.79	.68	.60	.53	.65	.58	.52	.62	.56	.51	.59	.54	.50	.47
5	.75	.62	.53	.46	.72	.61	.52	.46	.58	.51	.45	.55	.49	.44	.53	.48	.43	.41
6	.69	.56	.47	.40	.67	.55	.46	.40	.52	.45	.39	.50	.44	.39	.48	.42	.38	.36
7	.64	.51	.42	.36	.62	.49	.41	.35	.48	.40	.35	.46	.39	.34	.44	.38	.34	.32
8	.60	.46	.38	.32	.58	.45	.37	.32	.44	.36	.31	.42	.35	.31	.40	.35	.30	.28
9	.56	.42	.34	.29	.54	.42	.34	.28	.40	.33	.28	.39	.32	.28	.37	.32	.27	.25
10	.52	.39	.31	.26	.51	.38	.31	.26	.37	.30	.25	.36	.30	.25	.35	.29	.25	.23

OPTION DATA

CONTACT FACTORY FOR DETAILED SPECIFICATIONS OF EACH OPTION. CONTACT FACTORY FOR USE IN 347/480V APPLICATIONS.

DAYLIGHT HARVESTING & OCCUPANCY SENSOR	
CONTROL TYPE	PIR/PHOTOCELL 1-10v
AMBIENT TEMPERATURE	5°C TO 55°C
MOUNTING HEIGHT	8' TO 40'

OCCUPANCY SENSOR - ON/OFF	
CONTROL TYPE	PIR LINE VOLTAGE
AMBIENT TEMPERATURE	-10°C TO 60°C, LOW TEMP OPTION AVAILABLE
MOUNTING HEIGHT	15' TO 40'

WIRELESS CONTROL MODULE	
CONTACT FACTORY FOR WIRELESS CONTROL/SENSOR OPTIONS	

EMERGENCY BATTERY 10-WATT	
APPROX. LUMEN OUTPUT	1,360 LUMENS WITH CA LENS AND 5000K
AMBIENT TEMPERATURE	0°C TO 55°C
ILLUMINATION TIME	90 MINUTES


EMERGENCY BATTERY 15-WATT	
APPROX. LUMEN OUTPUT	2,040 LUMENS WITH CA LENS AND 5000K
AMBIENT TEMPERATURE	0°C TO 55°C
ILLUMINATION TIME	90 MINUTES

MOUNTING DETAILS

CABLE MOUNTS:



HXX-18Y OR HXX-18Y T (AC CABLE 2-POINT)
 -"XX" DENOTES LENGTH IN FEET.
 AVAILABLE IN 10', 20', 30'
 -"T" AT END OF PART NUMBER
 DENOTES TOGGLE INSTEAD OF HOOK



H4PXX (AC CABLE 4-POINT)
 -"XX" DENOTES LENGTH IN FEET.
 AVAILABLE IN 10', 20', 30'
 -"SS" AT END OF PART NUMBER
 DENOTES NATATORIUM GRADE 316 STAINLESS STEEL.
 RECOMMENDED FOR NATATORIUM APPLICATIONS

PENDANT MOUNT:



SPM (SINGLE POINT MOUNT)
 -3/4" IP THREADED HUB, SUSPENDED JUNCTION BOX
 -FIXED LENGTH (3' OR 5') AIRCRAFT CABLE HANGERS
 PROVIDED WITH HOOK ENDS.
 -POWER CORD ORDERED SEPARATELY

MYER'S HUB PENDANT MOUNTS:




MH1P (MYERS HUB 1 POINT)
 -(1) 3/4" IP THREADED HUB PROVIDED
 -OTHER HUB DIAMETERS ARE AVAILABLE, CONTACT FACTORY
 -MACHINED MOUNTING POINT IN FIXTURE CENTER PROVIDED
 -STEM/THREADED ROD NOT PROVIDED
 -NOT AVAILABLE ON ALL MODELS AND OPTIONS,
 CONTACT FACTORY FOR DETAILS.



SURFACE MOUNTS:



SM (SURFACE MOUNT)
 -NO ADDITIONAL HANGING HARDWARE PROVIDED
 -FIXTURE MAY BE ANCHORED TO ANY SUITABLE SUBSTRATE
 THROUGH ELECTRONICS CHANNEL



UH2 (UNISTRUT HARDWARE, 2 POINT)
 -UNISTRUT HARDWARE INCLUDES SPRING-NUT AND BOLT
 -2 SETS WILL BE PROVIDED

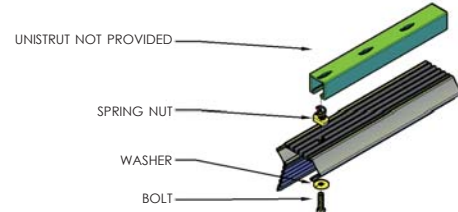UH4 (UNISTRUT HARDWARE, 4 POINT)
 -UNISTRUT HARDWARE INCLUDES SPRING-NUT AND BOLT
 -4 SETS WILL BE PROVIDED

