

PROJECT NAME:

TYPE:

NOTES:

IK10 PLUS HIGH EFFICACY SERIES

HIGH-BAY LED LUMINAIRE SPECIALIZING IN HIGH-ABUSE APPLICATIONS. INTENDED FOR GYMNASIUMS, NATATORIUMS, MANUFACTURING AND INDUSTRIAL FACILITIES, WAREHOUSES, CONVENTION CENTERS AND OTHER HIGH-CEILING APPLICATIONS.

OPTICS:

- WIDE 120° BEAM ANGLE FOR MAXIMUM UNIFORMITY
- DIFFUSE LENSING AVAILABLE IN CLEAR AND WHITE
- OPTIONAL POLYCARBONATE OR ACRYLIC LENSES
- WRAP-AROUND LENS OFFERS UP TO 10% UPLIGHT
- LED BARS ARE ROTATABLE FOR CUSTOM LIGHT DISTRIBUTION
- OPTIONAL NARROW REFLECTOR FOR AISLE APPLICATIONS

MECHANICAL:

- EXCEEDS IMPACT RATING OF IK10
- EXTRUDED ALUMINUM CONSTRUCTION
- STAINLESS STEEL HARDWARE
- ISOLATED DRIVER CHANNELS
- THERMALLY INDEPENDENT HEAT SINK LED BARS
- BRIGHT DIP ANODIZED FOR CORROSION RESISTANCE
- AMBIENT TEMPERATURE RATING:
-40°F TO 150°F, -40°C TO 65.5°C

COMPONENTS:

- HIGH-OUTPUT SAMSUNG LED CHIPS
- HIGH-TEMP OSRAM DRIVERS

INSTALLATION:

- AIRCRAFT CABLE SUSPENSION
- SURFACE MOUNTING
- RIGID PENDANT
- CUSTOM MOUNTS AVAILABLE, CONTACT FACTORY



PERFORMANCE:

- 39,069 NOMINAL LUMENS (5000K, NO LENS)
- 232 WATTS
- 168 LUMENS PER WATT
- TM-21: L₇₀ >72,000 HOURS
- CALCULATED L₇₀ >184,000 HOURS SPACING

ELECTRICAL:

- 120-277VAC STANDARD / 347-480VAC OPTIONAL
- 0-10V, 10% DIMMING DRIVERS STANDARD

WARRANTY:

- 10-YEAR WARRANTY ON FIXTURE BODY
- 5-YEAR WARRANTY ON ELECTRONICS
- FOR SPECIAL REQUESTS, CONTACT FACTORY

FIXTURE DIMENSIONS:

- 24" L x (24-42)" W x 2.5" H
- 12-21 LBS SEE ASSEMBLY CONFIGURATIONS BELOW

LISTINGS AND RATINGS:

- UL 1598 FOR DRY, DAMP, WET, AND CANOPY LOCATIONS
- ARRA COMPLIANT (MADE IN AMERICA)
- IP 56 RATED
- UL EPH LISTED - NSF RATED
- DLC PREMIUM LISTED
- 3G VIBRATION RATING



LUX IK10P E 6 H03 2'

MFR	SERIES	OUTPUT	NUMBER OF BARS	ELECTRONIC CHANNELS	ASSEMBLY CONFIG.	MODULE	CRI CCT	LENGTH	VOLTAGE DIMMING	LENS	NARROW OPTICS	CORD	CONTROLS	EMERGENCY BACKUP	CHANNEL ACCESS	BAR AIMING	FINISH	MOUNTING	APPLI-CATION	CUSTOM FIXTURE OUTPUT
LUX	IK10+	E-HIGH EFFICACY	6	S -SINGLE D -DOUBLE T -TRIPLE Q -QUAD	A B C D E F G	HIGH OUTPUT GEN. 3	850 840 835 830	2'	120-277V U10 10% dim U1 1% dim UX no dimming 347-480V H10 10% dim H1 1% dim HX no dimming	NL CA2 WA2 CP2 WP2	NRW SECONDARY NARROW OPTIC MAY BE USED ON SOME OR ALL BARS OF FIXTURE. IF MIXED DISTRIBUTION IS REQUIRED, PLEASE COORDINATE WITH FACTORY TO SPECIFY	3/10 4/10 5/10 6/10 WIRES 3 TO 6 LENGTH 10', 15', 20', 30'	DLH DAYLIGHT SENSOR OCC OCCUPANCY SENSOR D/O DAYLIGHT AND OCCUPANCY WCM WIRELESS CONTROL	EM 10 10W BATTERY EM 15 15W BATTERY	TOP BOT	DIR 0°NADIR IND 180°NADIR CLD CUSTOM LIGHT DISTRIBUTION COORDINATE WITH FACTORY FOR ALL CLD ORDERS.	STND MFHB CC END CAP CHANNEL LID HANGING BRACKETS BAR	CABLE: H4P10 H4P10SS PENDANT: MH1P MH2P SPM SURFACE: SM UH2 UH4 SEE MOUNTING DETAILS (PG2) FOR AVAILABLE OPTIONS	ARCH AFH GEN GYM HNG ICE MFG NAT TC WHS	PLEASE NOTE DELIVERED LUMENS ABOVE

CRI PERFORMANCE DATA

80 CRI - STANDARD/NOMINAL
90 CRI - 6% LIGHT LOSS
OTHER CRI AVAILABLE, CONTACT FACTORY

CCT PERFORMANCE DATA

5000K - STANDARD/NOMINAL
4000K - 4% LIGHT LOSS
3500K - 6% LIGHT LOSS
3000K - 8% LIGHT LOSS
OTHER CCT AVAILABLE, CONTACT FACTORY

CHANNEL AND ASSEMBLY CONFIGURATION:

SA		24"W, 12LBS
DA		30"W, 15LBS
DB		30"W, 15LBS
DC		30"W, 15LBS
TA		36"W, 18LBS
TB		36"W, 18LBS
QA		42"W, 21LBS

CUSTOM CONFIGURATIONS AVAILABLE, CONTACT FACTORY

CORD DATA

- 3 WIRE - SINGLE LEG ON/OFF SWITCH
- 4 WIRE - DUAL LEG SWITCH, OR SINGLE SWITCH WITH EMERGENCY BATTERY
- 5 WIRE - SINGLE LEG SWITCH WITH DIMMING
- 6 WIRE - DUAL LEG SWITCH WITH DIMMING OR SINGLE SWITCH WITH EMERGENCY BATTERY

APPLICATION TYPE:

- ARCH - ARCHITECTURAL
- AFH - ARENA/FIELDHOUSE
- GEN - GENERAL
- GYM - GYMNASIUM
- HNG - HANGAR
- ICE - ICE RINK
- MFG - MANUFACTURING
- NAT - NATATORIUM
- TC - TENNIS COURT
- WHS - WAREHOUSE

FIXTURE "FINISH" DETAILS

- STND-STANDARD:**
- LUX GREEN HANGING BRACKETS
 - BRIGHT DIP ANODIZED EXTRUSIONS
 - QUALIFIES AS NATATORIUM RATED
 - IF INSTALLED IN A NATATORIUM, LUX RECOMMENDS STAINLESS STEEL MOUNTS.
- MFHB-HANGING BRACKETS:**
- MILL FINISH HANGING BRACKETS
 - BRIGHT DIP ANODIZED EXTRUSIONS

CC-CUSTOM COLOR:

- 2MIL NATATORIUM-GRADE POWDERCOATED COMPONENTS IN ANY COLOR.
- PLEASE SPECIFY RAL NUMBER AND COMPONENTS TO BE FINISHED WHEN ORDERING.

CHANNEL ACCESS

- TOP - FIXTURE CHANNEL ACCESSIBLE FROM ABOVE, NOT AVAILABLE ON SURFACE MOUNTS.
- BOTTOM - FIXTURE CHANNEL ACCESSIBLE FROM BELOW.

LENS PERFORMANCE DATA

- NL (NO LENS) - NOMINAL, NO LIGHT LOSS
- CAx (CLEAR ACRYLIC) - 9% LIGHT LOSS
- WAx (WHITE/FROSTED ACRYLIC) - 16% LIGHT LOSS
- CPx (CLEAR POLYCARBONATE) - 14% LIGHT LOSS
- WPx (WHITE/FROSTED POLYCARBONATE) - 22% LIGHT LOSS

PHOTOMETRIC DATA

LUX-IK10P-E-6-DA-HO3-850-2-U10-CA2

LUMEN OUTPUT TABLE


80+ CRI STANDARD

Lens	5000K	4000K	3500K	3000K
NL (No Lens)	39,069	37,506	36,725	35,943
CAx (Clear Acrylic)	35,553	34,131	33,420	32,709
WAx (White Acrylic)	32,818	31,505	30,849	30,193
CPx (Clear Polycarbonate)	33,599	32,255	31,583	30,911
WPx (White Polycarbonate)	30,474	29,255	28,645	28,036

ZONAL LUMEN SUMMARY

Zone	Lumens	%Fixt
0-20	4,469	12.40%
0-30	9,477	26.40%
0-40	15,353	42.70%
0-60	26,810	74.60%
0-80	33,954	94.50%
0-90	34,647	96.50%
10-90	33,497	93.30%
20-40	10,884	30.30%
20-50	16,811	46.80%
40-70	15,959	44.40%
60-80	7,145	19.90%
70-80	2,642	7.40%
80-90	692	1.90%
90-110	139	0.40%
90-120	275	0.80%
90-130	516	1.40%
90-150	1,039	2.90%
90-180	1,270	3.50%
110-180	1,130	3.10%
0-180	35,916	100.00%

POLAR CANDELA GRAPH

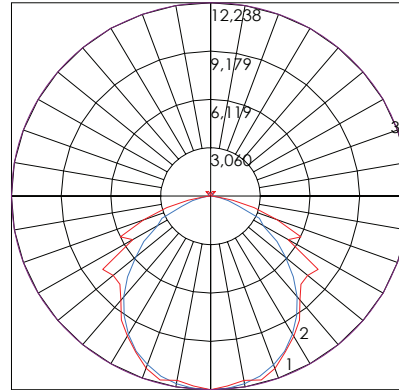

LEGEND:


MAXIMUM CANDELA = 12238
LOCATED AT:
HORIZONTAL ANGLE = 0,
VERTICAL ANGLE = 0

#1: VERTICAL PLANE
THROUGH HORIZONTAL
ANGLES (0 - 180)
(THROUGH MAX. CD.)

#2: VERTICAL PLANE
THROUGH HORIZONTAL
ANGLES (90 - 270)

#3: HORIZONTAL CONE
THROUGH VERTICAL ANGLE
(0) (THROUGH MAX. CD.)

LCS GRAPH

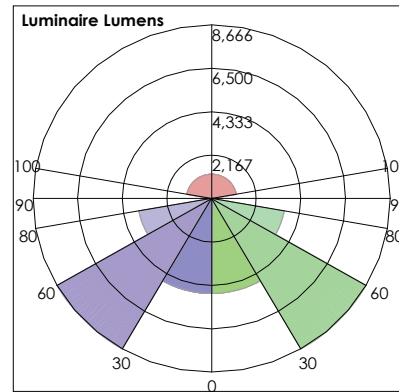

FRONT:

LOW=4738.5
MEDIUM=8666.3
HIGH=3572.3
VERY HIGH=346.1

BACK:

LOW=4738.5
MEDIUM=8666.3
HIGH=3572.3
VERY HIGH=346.1

UPLIGHT:

LOW=61.4
HIGH=1208.4

BUG RATING:
B5-U5-G3

COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

EFFECTIVE FLOOR CAVITY REFLECTANCE: 20%

RC	80				70				50				40				10				0			
	RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
0	1.18	1.18	1.18	1.18	1.15	1.15	1.15	1.15	1.09	1.09	1.09	1.04	1.04	1.04	.99	.99	.99	.99	.99	.99	.99	.96		
1	1.08	1.03	.99	.95	1.05	1.00	.96	.93	.95	.92	.89	.91	.88	.86	.87	.85	.83	.80	.87	.85	.83	.80		
2	.98	.89	.82	.77	.95	.87	.81	.75	.83	.78	.73	.79	.75	.71	.76	.72	.69	.67	.67	.62	.58	.56		
3	.89	.78	.70	.64	.86	.76	.69	.63	.73	.66	.61	.70	.64	.60	.67	.62	.58	.56	.62	.58	.56	.56		
4	.81	.69	.60	.54	.79	.68	.59	.53	.65	.58	.52	.62	.56	.51	.59	.54	.50	.48	.54	.50	.48	.48		
5	.75	.62	.53	.46	.72	.61	.52	.46	.58	.51	.45	.56	.49	.44	.53	.48	.43	.41	.48	.43	.41	.41		
6	.69	.56	.47	.40	.67	.55	.46	.40	.52	.45	.39	.50	.44	.39	.48	.43	.38	.36	.43	.38	.36	.36		
7	.64	.50	.42	.36	.62	.49	.41	.35	.48	.40	.35	.46	.39	.34	.44	.38	.34	.32	.44	.38	.34	.32		
8	.60	.46	.38	.32	.58	.45	.37	.31	.44	.36	.31	.42	.35	.31	.41	.35	.30	.28	.41	.35	.30	.28		
9	.56	.42	.34	.28	.54	.42	.34	.28	.40	.33	.28	.39	.32	.28	.38	.32	.27	.25	.38	.32	.27	.25		
10	.52	.39	.31	.26	.51	.38	.31	.26	.37	.30	.25	.36	.30	.25	.35	.29	.25	.23	.35	.29	.25	.23		

OPTION DATA

CONTACT FACTORY FOR DETAILED SPECIFICATIONS OF EACH OPTION. CONTACT FACTORY FOR USE IN 347/480V APPLICATIONS.

DAYLIGHT HARVESTING & OCCUPANCY SENSOR	
CONTROL TYPE	PIR/PHOTOCELL 1-10v
AMBIENT TEMPERATURE	5°C TO 55°C
MOUNTING HEIGHT	8' TO 40'

OCCUPANCY SENSOR - ON/OFF	
CONTROL TYPE	PIR LINE VOLTAGE
AMBIENT TEMPERATURE	-10°C TO 60°C, LOW TEMP OPTION AVAILABLE
MOUNTING HEIGHT	15' TO 40'

WIRELESS CONTROL MODULE	
CONTACT FACTORY FOR WIRELESS CONTROL/SENSOR OPTIONS	

EMERGENCY BATTERY 10-WATT	
APPROX. LUMEN OUTPUT	1,360 LUMENS WITH CA LENS AND 5000K
AMBIENT TEMPERATURE	0°C TO 55°C
ILLUMINATION TIME	90 MINUTES

EMERGENCY BATTERY 15-WATT	
APPROX. LUMEN OUTPUT	2,040 LUMENS WITH CA LENS AND 5000K
AMBIENT TEMPERATURE	0°C TO 55°C
ILLUMINATION TIME	90 MINUTES

MOUNTING DETAILS

CABLE MOUNTS:




H4PXX (AC CABLE 4-POINT)
 -"XX" DENOTES LENGTH IN FEET.
 AVAILABLE IN 10', 20', 30'
 -"SS" AT END OF PART NUMBER
 DENOTES NATATORIUM GRADE 316 STAINLESS STEEL.
 RECOMENDED FOR NATATORIUM APPLICATIONS


SURFACE MOUNTS:



SM (SURFACE MOUNT)
 -NO ADDITIONAL HANGING HARDWARE PROVIDED
 -FIXTURE MAY BE ANCHORED TO ANY SUITABLE SUBSTRATE
 THROUGH ELECTRONICS CHANNEL



UH2 (UNISTRUT HARDWARE, 2 POINT)
 -UNISTRUT HARDWARE INCLUDES SPRING-NUT AND BOLT
 -2 SETS WILL BE PROVIDED

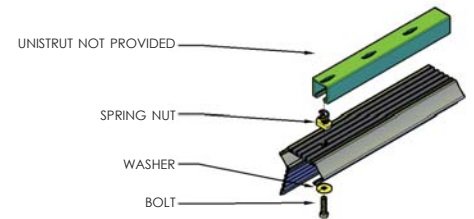


PENDANT MOUNT:




SPM (SINGLE POINT MOUNT)
 -3/4" IP THREADED HUB, SUSPENDED JUNCTION BOX
 -FIXED LENGTH (3' OR 5') AIRCRAFT CABLE HANGERS
 PROVIDED WITH HOOK ENDS.
 -POWER CORD ORDERED SEPARATELY



UH4 (UNISTRUT HARDWARE, 4 POINT)
 -UNISTRUT HARDWARE INCLUDES SPRING-NUT AND BOLT
 -4 SETS WILL BE PROVIDED

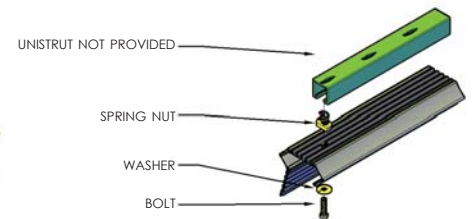

MYER'S HUB PENDANT MOUNTS:



MH1P (MYERS HUB 1 POINT)
 -(1) 3/4" IP THREADED HUB PROVIDED
 -OTHER HUB DIAMETERS ARE AVAILABLE, CONTACT FACTORY
 -MACHINED MOUNTING POINT IN FIXTURE CENTER PROVIDED
 -STEM/THREADED ROD NOT PROVIDED
 -NOT AVAILABLE ON ALL MODELS AND OPTIONS,
 CONTACT FACTORY FOR DETAILS.



MH2P (MYERS HUB 2 POINT)
 -(2) 3/4" IP THREADED HUBS PROVIDED
 -OTHER HUB DIAMETERS ARE AVAILABLE, CONTACT FACTORY
 -MACHINED MOUNTING POINTS IN FIXTURE CHANNEL(S)
 PROVIDED
 -STEMS/THREADED RODS NOT PROVIDED
 -NOT AVAILABLE ON ALL MODELS AND OPTIONS,
 CONTACT FACTORY FOR DETAILS.