

# RP-DN

# ring downlight

## order sequence information

RP-DN-

**1** **2** **3** **4**

EXAMPLE RP-DN- 48 3000 WHT SPC

PROJECT:

TYPE:

DATE:

CAT NO.	DESCRIPTION	DELIVERED LUMENS
RP-DN-24	24" diameter,	2,516 lumens, 35 watts
RP-DN-36	36" diameter,	3,362 lumens, 50 watts
RP-DN-48	48" diameter,	5,043 lumens, 70 watts
RP-DN-60	60" diameter,	7,565 lumens, 100 watts
RP-DN-72	72" diameter,	7,565 lumens, 100 watts
RP-DN-84	84" diameter,	9,246 lumens, 125 watts
RP-DN-96	96" diameter,	10,086 lumens, 135 watts
RP-DN-108	108" diameter,	10,927 lumens, 150 watts
RP-DN-120	120" diameter,	12,660 lumens, 185 watts
RP-DN-144	144" diameter,	15,129 lumens, 220 watts
RP-DN-168	168" diameter,	17,650 lumens, 255 watts
RP-DN-192	192" diameter,	20,170 lumens, 285 watts
RP-DN-240	240" diameter,	25,320 lumens, 370 watts

CAT NO.	DESCRIPTION	DELIVERED LUMENS
RP-DN-24-HO	24" diameter,	5,032 lumens, 70 watts
RP-DN-36-HO	36" diameter,	6,724 lumens, 90 watts
RP-DN-48-HO	48" diameter,	10,086 lumens, 140 watts
RP-DN-60-HO	60" diameter,	15,129 lumens, 220 watts
RP-DN-72-HO	72" diameter,	15,129 lumens, 220 watts
RP-DN-84-HO	84" diameter,	20,172 lumens, 250 watts
RP-DN-96-HO	96" diameter,	20,172 lumens, 270 watts
RP-DN-108-HO	108" diameter,	21,853 lumens, 300 watts
RP-DN-120-HO	120" diameter,	25,320 lumens, 375 watts
RP-DN-144-HO	144" diameter,	30,258 lumens, 440 watts
RP-DN-168-HO	168" diameter,	35,300 lumens, 520 watts
RP-DN-192-HO	192" diameter,	40,344 lumens, 570 watts
RP-DN-240-HO	240" diameter,	50,640 lumens, 750 watts

• LEDs are Luxeon XF-3535L. Drivers are Class 2, 120-277 volt, and include two wire 0-10v dimming, 1-100%.

### 4 MOUNTING

**MCC** Multiple suspension cables attach to a center canopy.  
 • Available for 24, 36, 48, 60, 72 and 84 inch diameter rings with 3 cables.

**SPC** Single point canopies (with one feed canopy)  
 • 24, 36, 48, 60, 72 and 84 inch diameter rings have 3 sets of canopy/cables. Larger sizes have six or eight canopy/cable sets.

• Canopies are matte white. 5 wire SJT cords are white. Cables are adjustable. Standard length is 100".

**CMT** Ceiling mount

**MRC** Multiple ring cluster. Suspended from a central canopy.

**BBU** Battery backup connected to one driver operates for 90 minutes. 120/277v includes test switch and LED indicator. Remote mounting by others.



### 2 LED COLOR TEMP


**3000** 3000°K CRI >80

**3500** 3500°K CRI >80

**4000** 4000°K CRI >80

• **RGB Options** RGB and RGB + white (2700K) LED options are available. Hand held remote included and phone Apps are available. Decoder options for connecting to a DMX system.

### 3 COLORS - NEXT PAGE

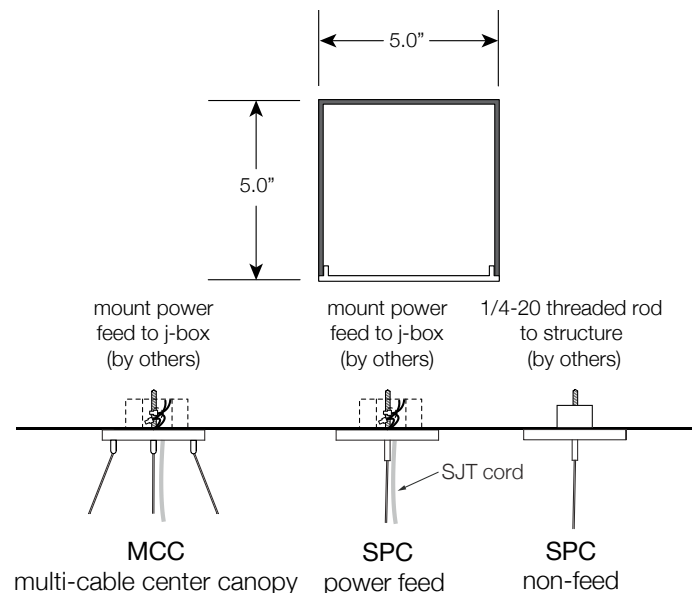

# RP-DN

## ring downlight

### 3 COLOR

WHT	Matte white powder coat
GRY	Matte gray (RAL7035) powder coat
ASL	Anodized silver powder coat
BLK	Satin black powder coat
RAL	Specify 4 digit RAL color number

Housing: Formed aluminum.

Lens: High transmissive frosted acrylic.

Certification: UL listed.

Warranty: 5 year limited warranty.

- 24", 36", 48", 60" and 72" fixtures ship in one piece.
- 84" and 96" rings ship in three sections for field assembly.
- 108", 120 and 144" rings ship in six sections for field assembly.
- 168", 192" and 240" diameter rings ship in eight sections (with 8 cables) for field assembly.

### WOOD FINISHES • Inner and outer walls of ring are covered

WG-01 wood grain finish



WG-02 wood grain finish



WG-03 wood grain finish



WG-04 wood grain finish

