

STARMED UNDERCABINET 2-3-4 FLUORESCENT

MUS2/MUS3/MUS4

SPECIFICATION FEATURES

- HOUSING:** 20 gauge formed cold rolled steel housing with continuous seam welds and ground smooth. Aluminum option available.
- LENS:** Lens is .125 Prismatic Acrylic.
- ELECTRONICS:** Electronic Ballast <10% THD standard. Lamps by others.
- FINISH:** White antimicrobial powder coat finish following iron phosphate pre-treatment.
- MOUNTING:** Keyhole slots for easy installation. Mounting screws are not provided.





APPLICATION:
 Patient Rooms, Nurse Stations, Desk Stations, Offices, Research Facilities, Laboratories, Display cases, and more.

LABEL:
 Fixture is certified to UL standards by Intertek Testing Laboratories.



ORDERING INFORMATION

Ex: MUS2-HC-1-14-A-12

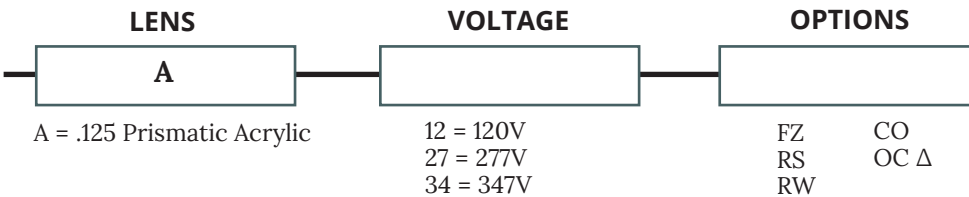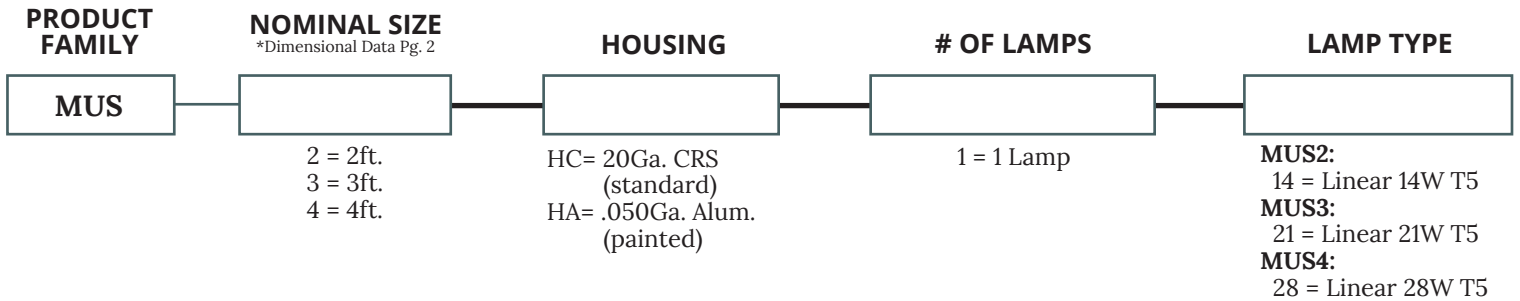

KEY

FZ = Fuse
 RW = Row Mounting (consult factory for options)
 RS = Rocker Switch (120V standard).
 Additional voltage options, consult factory.

CO = Convenience Outlet (120V only)
 OC = Motion Sensor (Integral)Δ

Δ Not available in 347V


Notes:
 Specifications and Dimensions are subject to change without notice.
 For additional options and dimensional details please consult your New Star Lighting Representative.

STARMED UNDERCABINET 2-3-4 FLUO.

MUS2/MUS3/MUS4



DIMENSIONAL DATA

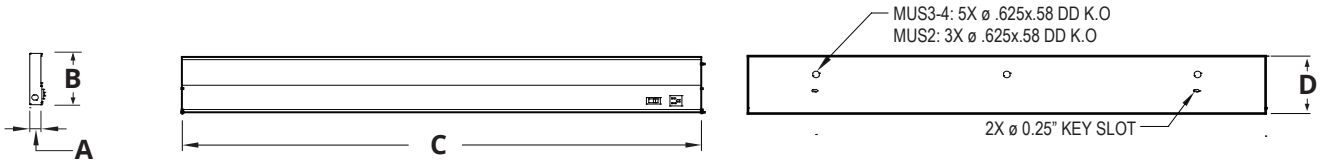

	A	B	C
MUS2	1.16"	5.00"	22.50"
MUS3	1.16"	5.00"	34.31"
MUS4	1.16"	5.00"	46.12"

Notes:
 Specifications and Dimensions are subject to change without notice.
 For additional options and dimensional details please consult your New Star Lighting Representative.