


Submitted by:		Date:
Type:	Project:	
Ordering Info:		

High Performance 4" Aperture Circle (HP-4 C)

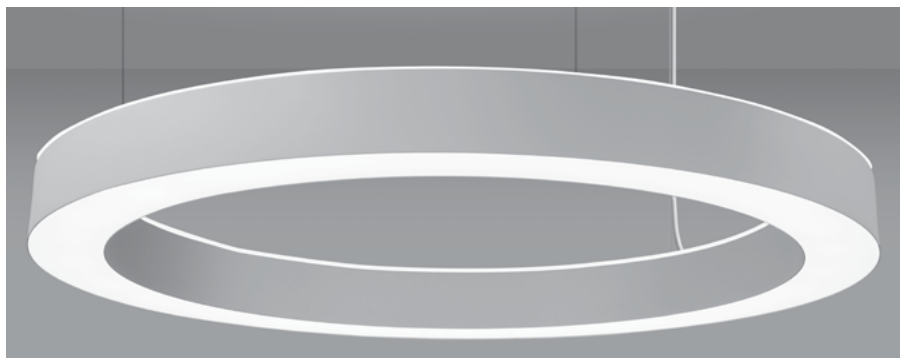


High Performance 4" Aperture Circle (HP-4 C) is a patented, circular LED luminaire. Constructed with an extruded aluminum body and single-piece direct diffuser, the HP-4 C provides a seamless finish aesthetic. Delivering excellent performance using an advanced optical design and mid-power LEDs to achieve 90% of initial light output at 100,000+ hours.

This product is enrolled in the International Living Future Institute (ILFI) Declare 2.0 Program and is third-party verified with options achieving Red List Approved and Declared status.

Signal White is standard finish

CROSS SECTION


Direct Pendant




Flush Downlight Diffuser
(standard)

Indirect/Direct

Top Glow Diffuser (standard)




Surface Mount



Recessed


(Spackle Flange Only)



GET MORE WITH TAILORED LIGHTING

- Tailored Color
- Tailored Output
- Tailored Control

SIZE OPTIONS

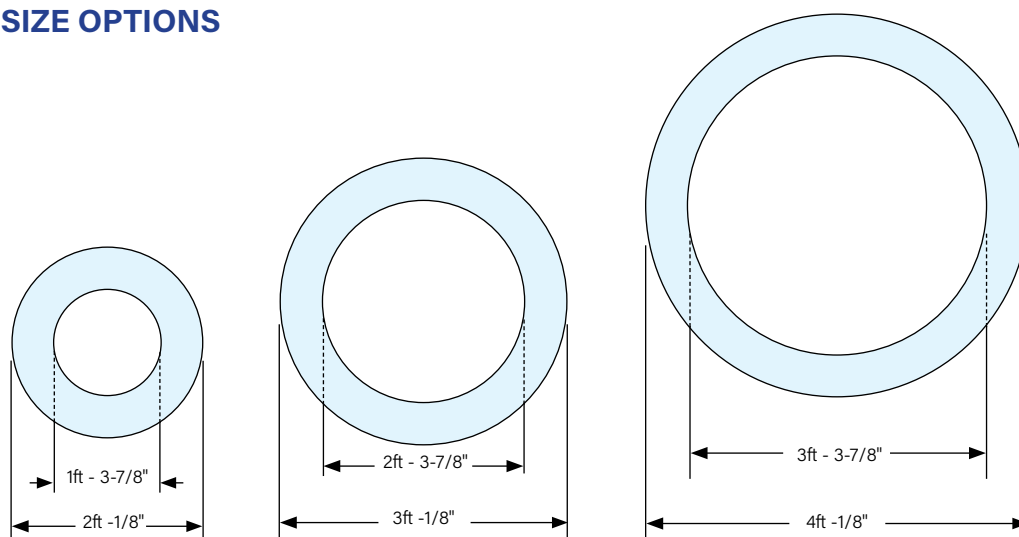

Protected by one or more US Patents: 8915613; D702,391; D702,390; D700,732

Page 1

Submitted by:		Date:
Type:	Project:	
Ordering Info:		

High Performance 4" Aperture Circle (HP-4 C)

BODY TYPE

Platform	Series Name	Luminaire Type	Luminaire Distribution	Size (Diameter) ¹
HP - High Performance	4 C	P - Pendant R - Recessed (<i>Spackle Flange Only</i>) SM - Surface Mount	D - Direct ID - Indirect/Direct (<i>Pendant Only</i>)	2' 3' 4'

OUTPUT and LED TYPE

MECHANICAL/OPTICAL OPTIONS

Uplight Output ID only	Downlight Output	LED CRI/CCT	Uplight ID only	Downlight	Reflector System
S - Standard B - Boosted Standard H - High V - Very High TL - Tailored: Im/ft*	S - Standard B - Boosted Standard H - High V - Very High TL - Tailored: Im/ft*	830 - 80 CRI, 3000K 835 - 80 CRI, 3500K 840 - 80 CRI, 4000K 930 - 90 CRI, 3000K 935 - 90 CRI, 3500K 940 - 90 CRI, 4000K 8TW - 80 CRI, Tunable White 9TW - 90 CRI, Tunable White	TG - Top Glow (standard) F - Flush	F - Flush	96 - 96 Low Gloss

* Specify Im/ft of outputs between Standard (S) and Very High (V). Consult factory for tailored lumen output outside of this range.

ELECTRICAL OPTIONS

Voltage	Circuiting ²	Driver Selection
120 - 120 Voltage 277 - 277 Voltage 347 - 347 Voltage	SC - Single Circuit* One single circuit in a run DC - Dual Circuit* ³ Independent control of up and down separately in an I/D style fixture * Emergency to Generator circuits are in addition to the normal luminaire circuit(s)	0-10V Driver Options FC-10% - 0-10V 10% (standard) ⁴ FC-1% - 0-10V 1% ⁴ OSR-10% - Osram OTi, 0-10V 10% ⁴ OSR-1% - Osram OTi, 0-10V 1% ⁴ ELD-10V-0% - EldoLED SOLOdrive, 0-10V 0.1% ⁵ ELD-10V-1% - EldoLED SOLOdrive, 0-10V 1% ⁵ OSR-10V-TW - Osram OTi, 0-10V 10% (<i>Tunable White</i>) ⁴ DALI Driver Options ⁵ FC-DALI-1% - DALI 1% OSR-DALI-1% - Osram Dexal, 1% ELD-DALI-0% - EldoLED SOLOdrive, DALI 0.1% ELD-DALI-TW - EldoLED DUALdrive LightShape, 1% (<i>Tunable White</i>) DMX Driver Options FIN-DMX - Finelite DMX 1% (<i>Tunable White - FineTUNE Controls Only</i>) ⁶ Lutron Driver Options ⁵ LUT-ES1 - Lutron, Ecosystem 1% LUT-2W - Lutron, 2-wire (120v only) 1% LUT-TW - Lutron T-Series, 1% (<i>Tunable White</i>) See Page 3 for additional driver options and details

MOUNTING OPTIONS

OTHER OPTIONS

Mounting Method	Ceiling Hardware Type ⁷	Finish	Emergency Style (Optional)	Special Options (Optional)
FA50 - Fully Adjustable 50" (Standard) ⁸ FA100 - Fully Adjustable 100" ⁸ FA150 - Fully Adjustable 150" ⁸ FA200 - Fully Adjustable 200" ⁸ FA250 - Fully Adjustable 250" ⁸ FA300 - Fully Adjustable 300" ⁸ SF - Spackle Flange ⁹	C1 - 1" T-Bar ⁷ C2 - 9/16" T-Bar ⁷ C3 - Screw Slot ⁷ C4 - Hard Ceiling ⁷ C1T - 1" Tegular ⁷ C2T - 9/16" Tegular ⁷	SW - Signal White FB - Finelite Black SA - Satin Aluminum #### - RAL Color Code ¹⁰ _____	EM/GEN - Emergency to Generator ALCR - Automatic Load Control Relay	CP - Chicago Plenum ¹⁰ FLX - Flex Whip ¹¹ RLA - Red List Approved RLD - Declared

¹ Nominal size

² Contact factory for switching options

³ Indirect/Direct only

⁴ Add DTO to gain "Dim to Off" functionality (FC-10% - DTO)

⁵ 3' & 4' diameters only

⁶ B & V outputs only

⁷ Pendant and Surface Mount only

⁸ Pendant only

⁹ Recessed only

¹⁰ Recessed and Pendant (Only available with C1, C2, and C3 mounting hardware with Finelite Gridbox)

Submitted by:		Date:
Type:	Project:	
Ordering Info:		

High Performance 4" Aperture Circle (HP-4 C)

SUPPLEMENTARY DRIVER PAGE

0-10V Driver Options

FC-10%	Factory choice 0-10V 10% Dimming (Linear)
FC-10%-DTO	Factory choice 0-10V 10% Dimming, Dim-to-Off (Linear)
FC-1%	Factory choice 0-10V 1% Dimming (Linear)
FC-1%-DTO	Factory choice 0-10V 1% Dimming, Dim-to-Off (Linear)
ELD-10V-0%¹	EldoLED SOLOdrive, 0-10V 0.1% Dimming (Linear)
ELD-10V-1%¹	EldoLED SOLOdrive, 0-10V 1% Dimming (Linear)
OSR-10vTW	Osram OTi, 0-10V 10% Dimming, <i>Tunable White</i> (Linear)
OSR-10vTW-DTO	Osram OTi, 0-10V 10% Dimming, Dim-to-Off, <i>Tunable White</i> (Linear)
OSR-10%	Osram OTi, 0-10V 10% Dimming (Linear)
OSR-10%-DTO	Osram OTi, 0-10V 10% Dimming, Dim-to-Off (Linear)
OSR-1%	Osram OTi, 0-10V 1% Dimming (Linear)
OSR-1%-DTO	Osram OTi, 0-10V 1% Dimming, Dim-to-Off (Linear)

DALI Driver Options¹

FC-DALI-1%	Factory choice DALI 1% Dimming (Logarithmic)
OSR-DALI-1%	Osram Dexal, DALI 1% Dimming (Logarithmic)
ELD-DALI-0%	EldoLED SOLOdrive, DALI 0.1% Dimming (Logarithmic)
ELD-DALI-1%	EldoLED SOLOdrive, DALI 1% Dimming (Logarithmic)
ELD-DALI-TW	EldoLED Dual Drive Light Shape, DALI 0.1% Dimming, <i>Tunable White</i> (Logarithmic Dimming , Linear CCT Control)

DMX Driver Options

FIN-DMX²	Finelite DMX 1% Dimming, <i>Tunable White</i> - FineTUNE Controls Only (Linear)
----------------------------	--

Lutron Driver Options¹

LUT-ES1	Lutron, Ecosystem 1% Dimming (LDE1)
LUT-2W	Lutron, 2-wire (120v only) 1% (LTEA2W)
LUT-TW	Lutron T-Series, 1% Dimming, <i>Tunable White</i> (PSQ02U)

¹ 3' & 4' diameters only

² B & V outputs only

Submitted by:		Date:
Type:	Project:	
Ordering Info:		

High Performance 4" Aperture Circle (HP-4 C)

SPECIFICATIONS

BODY TYPE

CONSTRUCTION: Precision-cut 6063-T4 extruded aluminum with 16 gauge steel assembly body.

SIZES: Circles are available in nominal diameters of 2', 3' and 4'.

OUTPUT and LED TYPE

LIGHT OUTPUT: Four lumen packages available, Standard (**S**), Boosted Standard (**B**), High (**H**), and Very High (**V**). For Tailored Outputs outside of range from Standard (**S**) to Very High (**V**), consult factory. A separate chart summarizes lumen distribution and wattage. Light engines are replaceable.

LUMEN MAINTENANCE: 90% of initial light output (L90) at 100,000+ hours; 70% of initial light output (L70) at 200,000+ hours.

MECHANICAL FEATURES

UPLIGHT DIFFUSER: Patented Top Glow frost white diffuser standard. 80% transmissive, 99% diffusion. Optional: Flush frost white snap-in diffuser, 80% transmissive, 99% diffusion.

DOWNLIGHT DIFFUSER: Single piece, seamless lens. Flush frost white snap-in lens standard, 80% transmissive, 99% diffusion.

REFLECTORS: Die-formed 20-gauge cold-rolled steel reflectors finished in 96LG High Reflectance white powder coat paint.

ELECTRICAL FEATURES

STATIC FEED: Standard with one 18-gauge/5-conductor single-circuit feed.

TUNABLE WHITE FEED: Standard with one 18-gauge/5-conductor single-circuit feed. DMX and power feed at same location (standard). DMX feeds cannot be cut or spliced. DMX feeds should be ordered based on fixed lengths.

STATIC WHITE DRIVER: Replaceable 120V, 277V, and 347V constant current reduction dimming driver standard. Can be wired dimming or non-dimming. 0-10V dimming controls with a range of 100%-10% standard. Dimming to 1% available. Separate dimming for uplight and downlight available. Driver is fully accessible from below the ceiling.

- **Power Factor:** ≥ 0.9
- **Total Harmonic Distortion (THD):** <20%
- **Expected driver lifetime:** 100,000 hours

LUTRON STATIC DRIVER OPTIONS ¹:

- **LUT-ES1 (LDE1)** - (Hi-lume 1% EcoSystem with Soft-On, Fade to Black dimming (LDE1 series)) (LDE1)
- **LUT-2W (LTES2W)** - (Hi-lume 1% 2-wire, 120V forward phase dimming (LTEA series)) (LTEA2W)

TUNABLE WHITE DRIVER: Replaceable LED driver. Driver is accessible from below the ceiling. 120V, 277V, and 347V.

- **Power factor:** ≥ 0.90
- **Total Harmonic Distortion (THD):** <20%
- **Dimming Range:** 100%-10%
- **Expected driver lifetime:** 100,000 hours
- FineTune DMX is 1%

LUTRON TUNABLE WHITE DRIVER OPTION ¹: LUT-TW (1% T-Series 2-Channel Digital Tunable White (PSQ Series)) (PSQ02U)

MOUNTING TYPE

MOUNTING:

- **Pendant:** 50" to 300" Fully Adjustable (**FA**) plated steel aircraft cable with safety stop hardware standard. Mounted with three equidistant vertical suspension cables.
- **Recessed Spackle Flange:** Drywall surfaces (walls or ceilings): 1/4" 20 stud and nut (provided by others). Mounted with three equidistant suspension points.
- **Surface Mount:** Lay-in ceiling types: caddy clip with 1/4" 20 stud and nut. Drywall or concrete surfaces (walls or ceilings): 1/4" 20 stud and nut (provided by others). Mounted with three equidistant suspension points.

TUNABLE WHITE DMX MOUNTING: For grid ceiling applications the dual GridBox™ mounting is supplied (standard). For hard ceiling applications the ceiling mounting box is supplied (standard). DMX feeds cannot be cut or spliced. DMX feeds should be ordered based on fixed lengths. Available DMX pendant feed lengths are 5', 12', and 30' (5' standard).

TUNABLE WHITE DMX INTERCONNECTION CABLES: Luminaires are prewired with plug-and-play interconnection cables to support easy plug-together joining of fixture runs. If a non-FineTune DMX system has been specified, a DMX to RJ45 converter is provided.

OTHER FEATURES

EMERGENCY STYLE: Optional emergency to generator/inverter wiring.

¹ 3' & 4' only

Submitted by:		Date:
Type:	Project:	
Ordering Info:		

High Performance 4" Aperture Circle (HP-4 C)

SPECIFICATIONS

TUNABLE WHITE ELECTRICAL OPTIONS:

- **TW Driver Options 0-10V:** EM/GEN
- **FineTune DMX:** EM/GEN
- **DALI:** EM/GEN
- **LUTRON:** EM/GEN

FINISHES: Finelite Signal White (**SW**) powder coat, Finelite Black (RAL 9005) with semi gloss fine texture (**FB**), and Satin Aluminum (**SA**) are standard. Optional Adder: 185 RAL colors² are available.

LABELS: Luminaire and electrical components are ETL-listed conforming to UL 1598 in the U.S.A. and CAN/CSA C22.2 No. 250.0 in Canada. In accordance with NEC Code 410.130 (G), this luminaire contains an internal driver disconnect. UL 924 and UL 2108 PoE options available on request. These fixtures are rated for Damp Location. Chicago Plenum options

available for C1, C2, or C3 suspension using our GridBox. Finelite products use electronic components that are RoHS compliant, and the mechanical components of the luminaire have been verified to not knowingly contain any restricted substances listed per RoHS Directive 2015/863. Consult

factory for tailored lighting options. Finelite makes the specification process easy when putting healthier products on your projects. Simply add - **RLA** (Red List Approved) or - **RLD** (Declared Label) to your part number.

WEIGHTS:

- Direct (pendant and surface mount): 2' = 15 lbs, 3' = 27 lbs, 4' = 42 lbs
- Recessed (spackle flange): 2' = 18 lbs, 3' = 30 lbs, 4' = 45 lbs
- Indirect/Direct (pendant): 2' = 18 lbs, 3' = 30 lbs, 4' = 45 lbs

WARRANTY: 10-year performance-based warranty on all standard components. Optional accessories are covered by their individual manufacturer warranties.

Submitted by:		Date:
Type:	Project:	
Ordering Info:		

High Performance 4" Aperture Circle (HP-4 C)

INDIRECT/DIRECT PHOTOMETRY 4' CIRCLE 3500K

HP-4C-P-ID-4'-V-V-835

Uplight: Flush / **Downlight:** Flush

Distribution: 51% Up (V) / 49% Down (V)

Efficacy: 107 lm/W

Uplight: 11798 lumens


Downlight: 11229 lumens

Total luminaire output: 23027 lumens
215.0 watts (171 watts/foot³)

Peak Candela Value⁴: 4561 @ 180°

CRI: 80 / CCT: 3500K

ITL LM79 Report 93249



CANDELA DISTRIBUTION⁴

	0	45	90	135	180	FLUX
0	4561	4561	4561	4561	4561	
5	4538	4538	4534	4526	4522	430
15	4293	4293	4305	4269	4234	1206
25	3812	3827	3855	3792	3721	1754
35	3180	3220	3255	3176	3101	2002
45	2506	2549	2600	2513	2442	1958
55	1835	1878	1922	1854	1795	1673
65	1219	1243	1282	1231	1192	1231
75	679	675	687	675	663	720
85	256	233	201	233	249	265
90	122	87	47	79	114	
95	268	237	205	229	260	275
105	769	738	702	710	738	774
115	1373	1353	1334	1326	1330	1329
125	2036	2044	2008	1989	1961	1797
135	2726	2734	2711	2648	2632	2078
145	3389	3393	3385	3318	3291	2099
155	3950	3942	3946	3890	3871	1805
165	4328	4332	4336	4313	4301	1219
175	4538	4534	4534	4534	4538	430
180	4561	4561	4561	4561	4561	

4'				
Total Light Output, 3500K, 80 CRI (Lumens)				

	↑S ¹	↑B ¹	↑H ¹	↑V ²
↓S ¹	9426 [↑51% 49%↓]	10668 [↑57% 43%↓]	13773 [↑67% 33%↓]	16395 [↑72% 28%↓]
↓B ¹	10608 [↑46% 54%↓]	11850 [↑51% 49%↓]	14955 [↑61% 39%↓]	17577 [↑67% 33%↓]
↓H ¹	13563 [↑36% 64%↓]	14805 [↑41% 59%↓]	17910 [↑51% 49%↓]	20532 [↑57% 43%↓]
↓V ¹	16059 [↑30% 70%↓]	17300 [↑35% 65%↓]	20405 [↑45% 55%↓]	23027 [↑51% 49%↓]

Power, 3500K (Watts Per Foot) ³				
--	--	--	--	--

	↑S ¹	↑B ¹	↑H ¹	↑V ²
↓S ¹	6.7	7.5	9.7	11.6
↓B ¹	7.6	8.5	10.7	12.5
↓H ¹	10.1	10.9	13.1	15.0
↓V ²	12.2	13.0	15.2	17.1

Efficacy, 3500K, 80CRI (Lumens Per Watt)				
--	--	--	--	--

	↑S ¹	↑B ¹	↑H ¹	↑V ²
↓S ¹	112	112	113	113
↓B ¹	110	111	111	111
↓H ¹	107	108	109	109
↓V ²	105	105	107	107

Sample Lumen Adjustment Calculation

Lumen Adjustment Factors 80 CRI

3000K	0.985
3500K	1.000
4000K	1.032

Lumen Adjustment Factors 90 CRI

3000K	0.746
3500K	0.760
4000K	0.789

High Output (H), Standard (S), 4000K, 90 CRI

Lumen Adjustment Factor: 0.789

Total Light Output: 13773 lm x 0.789 = 10867 lm

Total Light Output per Foot³: 10867 lm/ft / 12.6 = 862 lm/ft.

watts/foot: 9.7 W/ft.

$$\text{Efficacy} = \frac{862 \frac{\text{lm}}{\text{ft.}}}{9.7 \frac{\text{W}}{\text{ft.}}} = 89 \text{ lm/W}$$

S - Standard Output, B - Boosted Standard Output, H - High Output, V - Very High Output

¹Family Correlation based on 4' Circle, 3500K, Very High Output (V) test - 120V.

²Based on ITL report: 93249

³Lumens per foot and Watts per foot calculated using approximate outer circumferences of 6.3', 9.4', & 12.6' respectively for 2', 3', & 4' circles

⁴Values derived from testing a 90-degree section.

Protected by one or more US Patents: 8915613; D702,391; D702,390; D700,732

Page 6

Submitted by:		Date:
Type:	Project:	
Ordering Info:		

High Performance 4" Aperture Circle (HP-4 C)

INDIRECT/DIRECT PHOTOMETRY 3' CIRCLE 3500K

HP-4C-P-ID-3'-V-V-835

Uplight: Flush / **Downlight:** Flush

Distribution: 51% Up (V) / 49% Down (V)

Efficacy: 108 lm/W

Uplight: 9273 lumens

Downlight: 8827 lumens

Total luminaire output: 18100 lumens
168.0 watts (17.9 watts/foot ³)

3'				
Total Light Output, 3500K, 80 CRI (Lumens)				
	↑S ¹	↑B ¹	↑H ¹	↑V ²
↓S ¹	7409 [151% 49%↓]	8385 [157% 43%↓]	10826 [167% 33%↓]	12886 [172% 28%↓]
↓B ¹	8339 [146% 54%↓]	9315 [151% 49%↓]	11755 [161% 39%↓]	13816 [167% 33%↓]
↓H ¹	10661 [136% 64%↓]	11638 [141% 59%↓]	14078 [151% 49%↓]	16138 [157% 43%↓]
↓V ¹	12623 [130% 70%↓]	13599 [135% 65%↓]	16039 [145% 55%↓]	18100 [151% 49%↓]
Power, 3500K (Watts Per Foot) ³				
	↑S ¹	↑B ¹	↑H ¹	↑V ²
↓S ¹	7.0	7.8	9.9	11.7
↓B ¹	8.1	8.9	11.0	12.8
↓H ¹	10.8	11.6	13.7	15.5
↓V ²	13.2	14.0	16.1	17.9
Efficacy, 3500K, 80CRI (Lumens Per Watt)				
	↑S ¹	↑B ¹	↑H ¹	↑V ²
↓S ¹	113	114	117	117
↓B ¹	110	112	114	115
↓H ¹	105	106	109	111
↓V ²	102	103	106	108

INDIRECT/DIRECT PHOTOMETRY 2' CIRCLE 3500K

HP-4C-P-ID-2'-V-V-835

Uplight: Flush / **Downlight:** Flush

Distribution: 51% Up (V) / 49% Down (V)

Efficacy: 107 lm/W

Uplight: 5487 lumens

Downlight: 5223 lumens

Total luminaire output: 10710 lumens
100.0 watts (15.9 watts/foot ³)

2'				
Total Light Output, 3500K, 80 CRI (Lumens)				
	↑S ¹	↑B ¹	↑H ¹	↑V ²
↓S ¹	4384 [151% 49%↓]	4962 [157% 43%↓]	6406 [167% 33%↓]	7625 [172% 28%↓]
↓B ¹	4934 [146% 54%↓]	5512 [151% 49%↓]	6956 [161% 39%↓]	8175 [167% 33%↓]
↓H ¹	6308 [136% 64%↓]	6886 [141% 59%↓]	8330 [151% 49%↓]	9549 [157% 43%↓]
↓V ¹	7469 [130% 70%↓]	8047 [135% 65%↓]	9491 [145% 55%↓]	10710 [151% 49%↓]
Power, 3500K (Watts Per Foot) ³				
	↑S ¹	↑B ¹	↑H ¹	↑V ²
↓S ¹	6.2	6.9	8.8	10.4
↓B ¹	7.2	7.9	9.7	11.3
↓H ¹	9.6	10.3	12.2	13.8
↓V ²	11.7	12.4	14.3	15.9
Efficacy, 3500K, 80CRI (Lumens Per Watt)				
	↑S ¹	↑B ¹	↑H ¹	↑V ²
↓S ¹	112	114	116	117
↓B ¹	109	111	113	115
↓H ¹	104	106	109	110
↓V ²	101	103	106	107

S - Standard Output, B - Boosted Standard Output, H - High Output, V - Very High Output

¹Family Correlation based on 4' Circle, 3500K, Very High Output (V) test - 120V.

²Based on ITL report: 93249

³Lumens per foot and Watts per foot calculated using approximate outer circumferences of 6.3', 9.4', & 12.6' respectively for 2', 3', & 4' circles

Protected by one or more US Patents: 8915613; D702,391; D702,390; D700,732

Page 7

Submitted by:		Date:
Type:	Project:	
Ordering Info:		

High Performance 4" Aperture Circle (HP-4 C)

Static White Photometry - 4' Circle

HP-4C-P-D-4'-V-835

Efficacy: 100 lm/W


Total luminaire output: 11311 lumens
113 watts (9.0 watts/foot³)

Peak Candela Value *: 4306 @ 0°

CRI: 80

CCT: 3500K

ITL LM79 Report 91221



CANDELA DISTRIBUTION *

	0	22.5	45.0	67.5	90.0	FLUX
0	4306	4306	4306	4306	4306	
5	4282	4282	4282	4282	4282	407
15	4056	4064	4080	4083	4103	1151
25	3654	3662	3685	3717	3741	1702
35	3124	3140	3168	3208	3220	1988
45	2539	2555	2579	2607	2631	1997
55	1922	1934	1958	1978	1998	1754
65	1301	1309	1325	1341	1349	1316
75	704	712	720	728	728	764
85	203	203	203	203	203	232
90	0	0	0	0	0	

Total Light Output, 3500K, 80 CRI (Lumens)

	S ¹	B ¹	H ¹	V ²
2'	2377	2988	4516	5806
3'	3934	4945	7474	9610
4'	4630	5821	8797	11311

Power, 3500K (Watts Per Foot)³

	S ¹	B ¹	H ¹	V ²
2'	3.6	4.6	7.1	9.2
3'	4.0	5.1	7.8	10.2
4'	3.5	4.5	6.9	9.0

Efficacy, 3500K, 80 CRI (Lumens Per Watt)

	S ¹	B ¹	H ¹	V ²
2'	105	104	102	100
3'	105	104	102	100
4'	105	104	102	100

Sample Lumen Adjustment Calculation

Lumen Adjustment Factors 80 CRI

3000K	0.985
3500K	1.000
4000K	1.032

Lumen Adjustment Factors 90 CRI

3000K	0.746
3500K	0.760
4000K	0.789

High Output (H), 2', 4000K, 90 CRI

Lumen Adjustment Factor: 0.789

Total Light Output: 4516 lm x 0.789 = 3563 lm

Total Light Output per Foot³: 3563lm / 12.6' = 566 lm/ft.
watts/foot: 7.1 W/ft.

$$\text{Efficacy} = \frac{566 \frac{\text{lm}}{\text{ft.}}}{7.1 \frac{\text{W}}{\text{ft.}}} = 80 \text{ lm/W}$$

S - Standard Output, B - Boosted Standard Output, H - High Output, V - Very High Output

¹Family Correlation based on 4' Circle, 3500K, Very High Output (V) test - 120V.

²Based on ITL report: 91221

³Watts per foot calculated using approximate outer circumferences of 6.3', 9.4', & 12.6' respectively for 2', 3', & 4' circles

⁴Values derived from testing a 90-degree section.

Protected by one or more US Patents: 8915613; D702,391; D702,390; D700,732

Page 8

Submitted by:		Date:
Type:	Project:	
Ordering Info:		

0-10V Tunable White

Finelite's award-winning, contractor friendly Tunable White luminaires are available at low cost, with powerful and simple 0-10V tuning and intensity controls.

TUNABLE WHITE FEATURES

- CCT range: 2700K - 6500K
- Dimming Range: 100% to 10%
- CRI Options: 80 CRI or 90 CRI


PHOTOMETRY

Apply a power adjustment factor to calculate wattage usage

POWER	CONVERSION FACTOR
	1.1X

(Example: a 50 watt luminaire in static white would draw 55 watts using 0-10V Tunable White)

WIRING DIAGRAM - DIMMABLE TO 10%

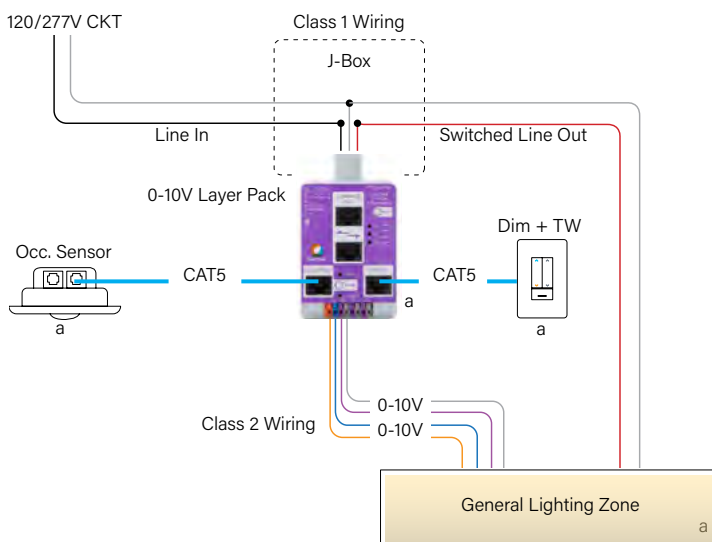


Luminaire Wiring

- **Purple (+) / Pink (-)** control wires are for intensity control
- **Orange (+) / Blue (-)** control wires are for Tunable White control

Note:

Load or Dim to Off options available.


DUAL FEED DETAIL



Black, White, Green

Power Feed

WIRING LEGEND		
Black	Hot	Line Voltage
White	Neutral	Line Voltage
Green	Ground	



Pink, Purple

Orange, Blue

0-10V dimming
and color feed

WIRING LEGEND		
Pink	Dimming	0-10V DC
Purple	Dimming	0-10V DC
Orange	TW	0-10V DC
Blue	TW	0-10V DC