

PROJECT NAME:	APPROVED BY:
CATALOG NO:	TYPE NO:

# TELESIS - LED EXIT SIGNS

## Commercial Grade

Telesis LED exit signs feature low energy, long life LED light sources in an attractive, and economical low profile, tough ABS housing. Telesis exits are universal single or double face, and include a low profile canopy and field selectable chevron indicators. Snap-Fit construction and quick connect components provide fast, installer friendly installation and ease of maintenance.

### Construction

- Attractive, Low Profile ABS Injection Molded Thermoplastic housing in a pure white or Black finish
- Universal single or double face with mounting canopy
- Snap Together, Quick Fit Installation with Field Selectable Chevron Directional Indicators
- Red or Green letters with the required 6" high letters with 3/4" stroke meets NFPA 101 requirements
- Fully integral Quick Connect components

### Electrical

- Exceptionally Low Energy Consumption at just 2 Watts avg.
- LED light source with 20+ years life expectancy
- Field Selectable 120 or 277 VAC input
- Available with a full self-test / self-diagnostic option
- Electronic Control Circuit and Isolation Transformer provide current control and circuit protection ensuring optimum LED efficiency and life
- Minimum 90 Minute Emergency Duration with premium Nickel Cadmium Battery
- Operating temperature range 0°C to 50°C
- Low voltage cut-off prevents battery damage and ensures positive charge acceptance following an extended discharge



- Line-latch prevents unnecessary discharge of battery during installation
- AC Present Indicator and Push to Test Switch

### Illumination

- High Intensity LED Array and spectrally matched diffuser providing superior visual brightness and uniformity

### Certification


- Damp location listed as standard
- UL 924 listed and meets or exceeds all performance standards as required by NFPA 101 Life Safety Code, NFPA 70-NEC, and OSHA
- California Energy Code (CEC) Title 20 Compliant

### Warranty

- 3 year limited warranty



### Self Diagnostic Option

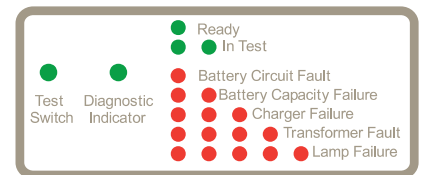

## ORDERING GUIDE

Example: TLX-EM-RU-W-SD

Model	Operation	Letter Color	Housing Color	Options
TLX Telesis LED Exit Sign	<b>AC</b> AC Only 120/277 <b>EM</b> Battery Back-up Emergency	<b>RU</b> Red Universal <b>GU</b> Green Universal	<b>W</b> White (Standard) <b>B</b> Black (must be ordered with SD option)	<b>US</b> Assembled in the USA <b>DK</b> Two Circuit Input (AC Only Operation, specify voltage)* <b>SD</b> Self-Diagnostic Testing (EM Only) <b>PA</b> 12" Swivel Pendant Kit <b>PB</b> 24" Swivel Pendant Kit <b>PC</b> 36" Swivel Pendant Kit <b>PD</b> 48" Swivel Pendant Kit <b>M990010</b> Wall Mount Wire Guard 16" W x 11" H x 3" D <b>VX</b> Vandal Resistant Shield (wall mount only) * Dual circuit option cannot be used with two live circuits
TLX				

Fill in fields from categories above and complete type and part number.

Type Number:

Full Part Number:

# Telesis LED Exit Signs

