


EMER/MRW ^{LED} MR-16 Style Emergency Light - Wet Location



CATALOG #: _____

TYPE: _____

PROJECT: _____

FEATURES

- Classic MR-16 style LED lamps with fully adjustable heads provide optimal center-to-center spacing
- Provides 90 minutes of emergency operation
- Ultra-bright, energy-efficient, long-life 3.3W LEDs
- Low voltage disconnect prevents battery from deep discharge
- Fully automatic solid-state two rate charger recharges battery in 24 hours
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- Fully gasketed clear polycarbonate cover offers protection against wet, non-hazardous dust, corrosive atmospheres and to water spray or splashing water locations

ORDERING EXAMPLE: EMER/MRW - GRAY - OPTIONS - D

ORDERING INFO

SERIES	HOUSING COLOR	OPTIONS	VOLTAGE
EMER/MRW	GRAY Gray BLK Black	HTR Internal heater ^[1] CW Internal heater with battery blanket ^[2] WG Wireguard ^[3]	D 120V/277V

SPECIFICATIONS

- HOUSING – Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in grey or black finish with fully gasketed clear polycarbonate cover.
- ELECTRICAL – Dual 120/277 voltage. 6V maintenance-free, rechargeable sealed lead acid battery.
- MOUNTING – Wall mount via knockouts on the back of the housing.
- LISTINGS –
 - UL 924 standard as an emergency light suitable for wet locations (20°C - +40°C).
 - Meets NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- WARRANTY – 5-year limited warranty.

NOTES

- ¹ For cold temperature applications -9°C - +40°C.
- ² For cold temperature applications -25°C - +40°C.


³ Ships separately. See page 2 for OPTIONS DETAILS.

EMER/MRW^{LED} MR-16 Style Emergency Light - Wet Location

MOUNTING DETAILS


WALL MOUNT BOLT CIRCLE PATTERN

Not to scale.

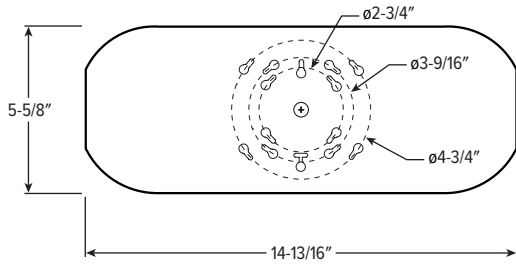

OPTIONS DETAILS

WG



DIMENSIONS: 13-3/4" x 15-1/4" x 6"