

6 1/4"

6 1/2"

3 7/16"

Banner Arm Mounting Styles

3" Mounting Collar

4" Mounting Collar

5" Mounting Collar

6" Mounting Collar

Bolt-on

5/16"

2 1/2"

7/8"

\$⊡⊵

ইবোচা

Banner Length

Banner Length

anner Length

1/16'

Banner Length

Banner Length

Banner Length

· 1/2

1" External NPT thread Threaded

3/4

1/8

5/16

DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

Construction:

Specifications


All cast aluminum parts shall low copper alloy A356. All extruded aluminum parts shall be alloy 6061-T6, 6063-T5 or equal.

Fasteners:


All fasteners shall be stainless steel. When tamper resistant fasteners are required, spanner HD (snake eye) style shall be provided (special tool required, available at additional cost), consult factory for availability.

Finish:

Finish shall be Beacote III polyester powdercoat electrostatically applied and thermocured. Poles shall be subjected to chemical pre-treatment prior to painting by immersion process.

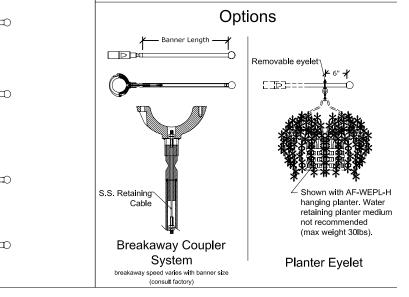

Ordering Example: AA-0024 / 4"MTC / BA / BKT

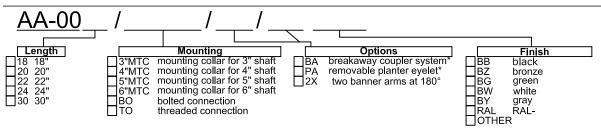

1/2

Consult factory for premium and verde finishes. Custom colors available.

Notes: * Consult factory