

S4

Suspended LED Luminaire

For Ambient Lighting

MOJO
ILLUMINATION



Project: _____
Cat#: _____
Type: _____
Notes: _____

Product Description

The S4 direct/indirect LED Architectural Luminaire offers modern industrial styling for general lighting applications. The S4 is available in raw metal finishes and its LED technology offers significant energy efficiency over traditional sources.

Construction

The S4 is constructed out of die formed steel and aluminum and finished with raw metal or powder coat finishes. Lenses are high light transmission UV stable acrylic. Mounting to grid or drywall ceiling via fully adjustable aircraft cables.

Light Source

Light source comprised of mid power LEDs that are thermally engineered to ensure optimal efficacy's over 100 lumens per watt and 80+ CRI. Luminaire light output guaranteed to achieve a minimum of 70% luminaire output over 100,000 hours at typical 25 deg. C operating conditions. LED components and luminaires are compliant with IESNA LM80.

Certification and Warranty


Luminaires carry a limited 5 year warranty and all luminaires are UL listed for indoor damp rated lighting applications.

Fixture Options

Example S440-DD-37-1000F-35K-010-M-1C-A4-W-ST-GA

Series	S440 S480	42" Pendant 83" Pendant	S4__
Optics Up	D P	Standard Diffuse Lens Performance Batwing Optic	
Optics Down	D P BB PB LS LB	Standard Diffuse Lens Performance Lens Black Baffle Performance Lens/Baffle Louvre Semi Specular Louvre Black	
Distribution	37 01	30%up / 70%dn 100% down	
Light Level	750F 1000F 1350F	750 lm per ft 1000lm per ft 1300lm per ft	
Color	30K 35K 40K	3000K 3500K 4000K	
Driver	010 STD	0-10 volt Dimming STD Switched Driver	
Power	M	120-277 Universal	
Circuits	1C 2C	Single Circuit 2 Circuit Up/Down – 8' Sections Only	
Mounting	A4 A10	Aircraft Cable 4' Adjustable Aircraft Cable 10' Adjustable	
Mounting Color	W B	White Cords and Canopies (STD) Black Cords and Canopies	
Ceiling	G1 G9 GS ST	15/16" Grid Ceiling 9/16" Grid Ceiling Slot Grid Ceiling Drywall/Structure	
Finish	NA GA BA WH BK SM CC	Natural Aluminum Finish Galvanized Metal Finish Brushed Aluminum Finish White Powder Coat Finish Black powder Coat Finish Silver Metallic Powder Coat Custom Color Finish	
Options		Consult Factory	


Performance

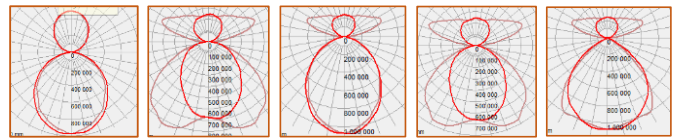


DD PP PBB PPB PLS

Light Level	Lumens	Watts	Lumens/Watt
750F nominal	3100	27	115
1000F nominal	4250	38	112
1350F nominal	5750	55	105

Optics

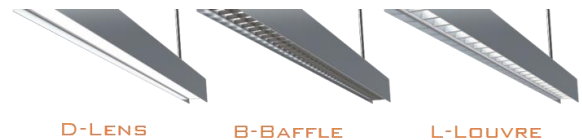

Dimensions




S4

Suspended LED Luminaire

For Ambient Lighting

MOJO
ILLUMINATION

Fixture / Row Lengths

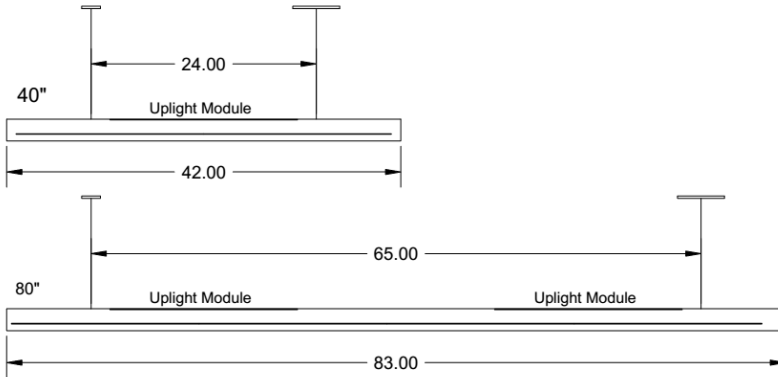

Mounting

ST- Drywall / Structure

G1, G9, GS - Grid Ceiling

