


# SOLN Linear

## Suspended LED Luminaire

For Ambient Lighting

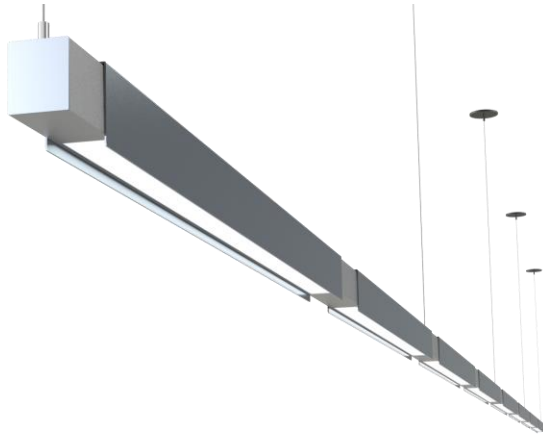

Project: \_\_\_\_\_  
 Cat#: \_\_\_\_\_  
 Type: \_\_\_\_\_  
 Notes: \_\_\_\_\_

### Fixture Options

Example SOLN-P-LB-37-1000F-35K-010-M-1C-A4-W-ST-NA-16

Series	SOLN	S0 Linear Pendant	SOLN
Optics Up	D	Standard Flat Diffuse Lens	
	P	Performance Optic	
Optics Down	D	Standard Flat Diffuse Lens	
	P	Performance Lens	
	B	Black Baffle	
	PB	Performance Lens/Baffle	
	LS	Louvre Semi Specular	
Distribution	37	30%up / 70%dn	
	01	100% down	
Light Level	750F	750lm per ft	
	1000F	1000lm per ft	
	1350F	1300lm per ft	
Color	30K	3000K	
	35K	3500K	
	40K	4000K	
Driver	010	0-10 volt Dimming	
	STD	STD Switched Driver	
Power	M	120-277 Universal	
Circuits	1C	Single Circuit	
	2C	2 Circuit Up/Down-	
Mounting	A4	Aircraft Cable 4' Adjustable	
	A10	Aircraft Cable 10' Adjustable	
Mounting Color	W	White Cords and Canopies (STD)	
	B	Black Cords and Canopies	
Ceiling	G1	15/16" Grid Ceiling	
	G9	9/16" Grid Ceiling	
	GS	Slot Grid Ceiling	
	ST	Drywall/Structure	
Finish	WH	White Texture Powder Coat	
	BK	Black Texture Powder Coat	
	SM	Silver Metallic Powder Coat	
	BA	Brushed Aluminum Finish	
	GA	Galvanized Steel Finish	
	NA	Natural Aluminum Finish	
	CC	Custom Color Finish	
Length	04	4' Individual Fixture	
	08	8' Individual Fixture	
	xx	Row Length (4' Increments)	
Options		Consult Factory	

### Product Description

The SOLN direct/indirect LED Linear System is a slim modern architectural pendant for general lighting applications. The S0 is customizable with different materials and finishes. Available in standard 4' and 8' fixtures joinable into continuous runs. LED technology offers significant energy efficiency over traditional sources to achieve low watts per square foot performance.

### Construction

The S0 is constructed out of die formed steel and aluminum and is available in a variety of raw metal finishes, standard powder coat, or custom color finishes. Lenses are high light transmission UV stable acrylic. Lenses are high light transmission UV stable acrylic. Mounting to grid or drywall ceilings via fully adjustable aircraft cables.


### Light Source

Light source comprised of mid power LEDs that are thermally engineered to ensure optimal efficacy's over 100 lumens per watt and 80+ CRI. Luminaire light output guaranteed to achieve a minimum of 70% luminaire output over 100,000 hours at typical 25 deg. C operating conditions. LED components and luminaires are compliant with IESNA LM80.

### Certification and Warranty


Luminaires carry a limited 5 year warranty and all luminaires are UL listed for indoor damp rated lighting applications.

### Performance

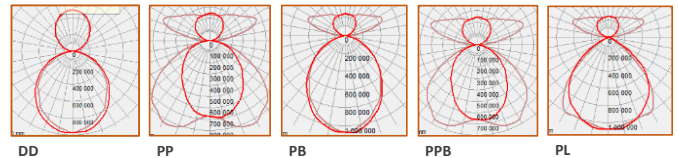


Light Level	Lumens	Watts	Lumens/Watt
750F nominal	3100	27	115
1000F nominal	4250	38	112
1350F nominal	5750	55	105


### Optics

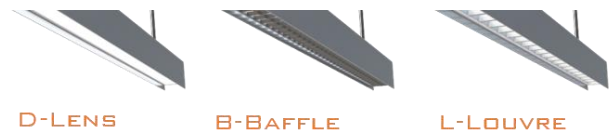

### Dimensions




### Fixture / Row Lengths

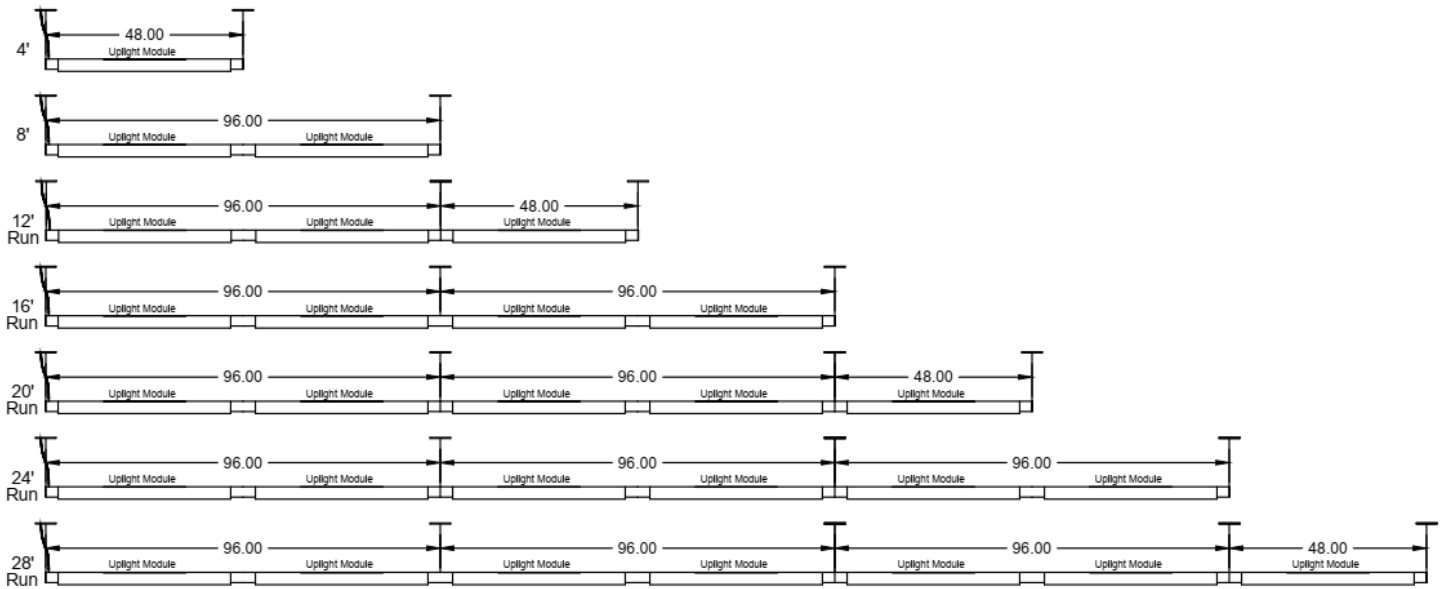

### Mounting

#### ST- Drywall / Structure

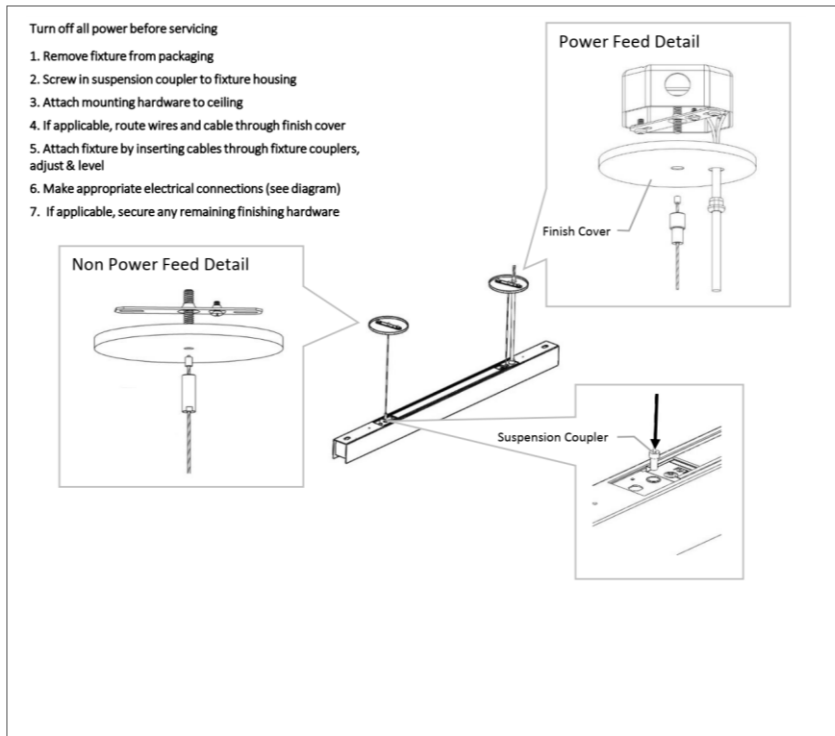

#### G1, G9, GS - Grid Ceiling

