

GC4DRREM

4" Gravity LED Downlight Cylinder With Remote Driver Enclosure

JOB NAME		CATALOG NUMBER	
NOTES		TYPE	

ELECTRICAL DATA: (Data Based On 3000K/82CRI Configuration)

LED Light Engine	Nominal Delivered Lumen*	System Wattage**	Efficacy	LED Light Engine	Nominal Delivered Lumen*	System Wattage**	Efficacy
L1	1000lm	10W	100 lm/W	L6	3500lm	36W	97 lm/W
L2	1500lm	14W	107 lm/W	L7	4000lm	43W	93 lm/W
L3	2000lm	19W	105 lm/W	L8	4500lm	46W	98 lm/W
L4	2500lm	24W	104 lm/W	L9	5000lm	54W	93 lm/W
L5	3000lm	30W	100 lm/W				

*System Wattage include driver and LED Module consumption. / ** Delivered lumens will vary depending on CCT, CRI and optic selection

FEATURES

- High performance cylinder extruded from aluminum in durable powder coat finishes
- Control protocols from ELV, 0-10V, 2-wire, DALI and DMX with options available in 0.1% and dim-to-dark

LED LIGHT ENGINE

- 82/92 CRI at 2700K, 3000K, 3500K & 4000K
- 2 Step MacAdam (2 SDCM)d
- Rated life of >50,000 hours L70 based on LED testing per LM-80-08 and projected values using IESNA TM21-11

DIMMING

- Phase Dimming 120V only, Forward 1% / Reverse 5%
- 0-10V Dimming 1%
- eldoLED 0-10V 0.1% or 1%
- Lutron® LDE1 Hi-Lume 1% EcoSystem LED driver with Soft-on, Fade-to-Black dimming technology
- Lutron® LTEA2W Hi-Lume 1% 2-Wire LED driver (120V forward phase only)
- DMX512 RDM 0.1%

OPTICS

- 14° Narrow Spot, 20° Spot, 30° Narrow Flood, 40° Flood and 50° Wide Flood
- Optics and filter media are field customizable

ELECTRICAL SYSTEM

- Dedicated voltage options of 120V, 277V or 347V. Must be specified in catalog code. Consult factory for 347V
- eldoLED 0.1% drivers dim to 0% as standard. If 0.1% is desired, ensure control signal does not go below 1.0V
- This product complies with IEEE C62.41 for surge endurance up to 2.5KV. Additional surge protection recommended. Damage from power surge is not covered by warranty.

EMERGENCY BACKUP

Remote test switch included. External battery operates LED load of up to 7W at a minimum of 400 lumens for 90 minutes (EM7), or 20W at a minimum of 1250 lumens for 90 minutes (EM20).

REFLECTOR

Specification grade reflector with 1.5mm thickness. Reflector available in haze, white, clear, black or wheat finish. Consult factory for other colors. Architectural, discrete polished self flange standard. Meets RP-1 requirements with controlled light distribution at a 55° cut off.

REMOTE DRIVER ENCLOSURE

- Galvanized steel construction
- 50ft remote distance maximum

ACCESSORIES

Luminaire will accommodate (2) accessories, accessory holder required.

MOUNTING

- Surface mount for direct installation to 3" or 4" Octagonal J-Box.
- 144" Aircraft cable is supplied with canopy assembly.
- Aircraft cable with DMX dimming, supplied with smart canopy.
- Wall mount bracket for installation to 4" Octagonal J-Box.
- Pendant stems supplied with complete canopy assembly.
- Supplied aircraft cables and slope pendant stems are cuttable and can be modified in the field.

LISTING / WARRANTY

- ETL Listed to US and Canadian standards for damp locations
- 5-Year Intense LED Limited Warranty



Gravity™



Dimension are on Page 2

Accessories

LH63	(Black Accessory Holder)
LH63W	(White Accessory Holder)
PFL2-63	(Linear Spread Lens)
PFL4-63	(Solite Soft Focus Lens)
PFLMB-63	(Black Hex Louver)

Cylinder Part Number (Example: GC4DRREML327NSWWP12)

Cylinder	Wattage	CCT / CRI	Optic	Cylinder Finish	Reflector Finish	Mounting
GC4DRREM	L1 (10W)	27 (2700K / 82 CRI)	NS ⁴ (14° Narrow Spot)	W (White)	HZ (Haze)	C144 (144" Aircraft Cable)
	L2 (14W)	279 (2700K / 92 CRI)	SP (20° Spot)	B (Black)	W (White)	P12 (12" Slope Pendant)
	L3 (19W)	30 (3000K / 82 CRI)	NF (30° Narrow Flood)	SV (Silver)	C (Clear)	P24 (24" Slope Pendant)
	L4 (24W)	309 (3000K / 92 CRI)	FL (40° Flood)		B (Black)	P36 (36" Slope Pendant)
	L5 (30W)	35 (3500K / 82 CRI)	WF (50° Wide Flood)		WHT (Wheat)	P48 (48" Slope Pendant)
	L6 (36W)	359 (3500K / 92 CRI)				P96 (96" Slope Pendant)
	L7 (43W)	40 (4000K / 82 CRI)				WB (Wall Bracket)
	L8 (46W)	409 (4000K / 92 CRI)				S (Surface)
	L9 (54W)					

Remote Emergency Power Box (Example: REMGC4D10134EM7)

Power Box	Wattage	Dimming	Voltage	Emergency Back Up
REMG4	L1 (10W)	DIM ¹ (Phase Dimming)	blank (120V/277V)	EM7 (7W Emergency Backup)
	L2 (14W)	D101 (0-10V Dimming 1%)	34 ⁵ (347V)	IOTA part #ILB-CP07-A
	L3 (19W)	ED10V1 (eldoLED 0-10V 1%)		EM20 ⁶ (20W Emergency Backup)
	L4 (24W)	ED10V01 (eldoLED 0-10V 0.1%)		Bodine part #BSL20LV
	L5 (30W)	LUT ² (Lutron® LDE1 EcoSystem 1%)		
	L6 (36W)	LUT2 ^{1,2} (Lutron® LTEA2W 2-Wire 1%)		
	L7 (43W)	DMXR ³ (DMX512 RDM 0.1%)		
	L8 (46W)			
	L9 (54W)			

Notes:

- Available in 120V only
- Lutron® dimming not available in L9
- DMX512 RDM not available with L1 & L2
- 14° Optic not available in L8 & L9
- Consult factory for lead times
- EM20 only available for L4 to L9

GRAVITY CYLINDERS L/M-0418.22 P-1

INTENSE LIGHTING | 3340 E La Palma Ave, Anaheim, CA 92806 | tel 714 630-9877 | fax 714 630-9883

For Intense Lighting's limited product warranty, go to www.intenselighting.com. For a printed copy of the warranty, you may call 800 961-5321.

© 2022 Intense Lighting, LLC. All rights reserved. Note: This document is subject to change without notice.


intense[®] | a LEVITON[®] company
LIGHTING

GC4DRREM


4" Gravity LED Downlight Cylinder With Remote Driver Enclosure

JOB NAME		CATALOG NUMBER	
NOTES		TYPE	


Surface Mount

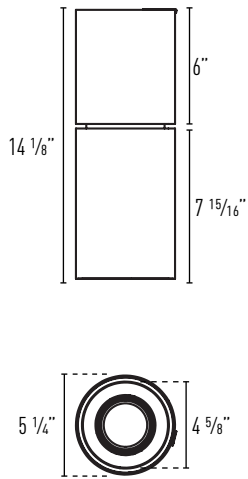


Wall Mount

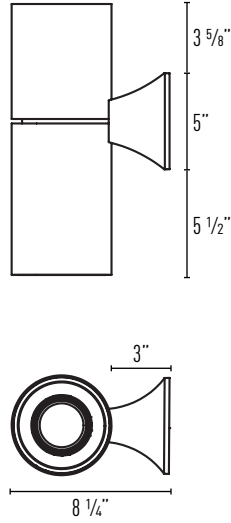

Aircraft Cable

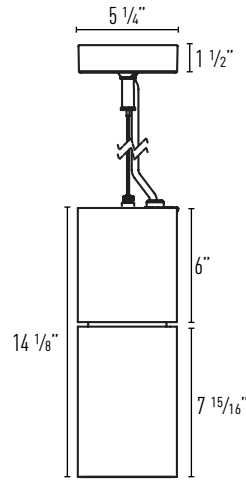


Slope Pendant Mount

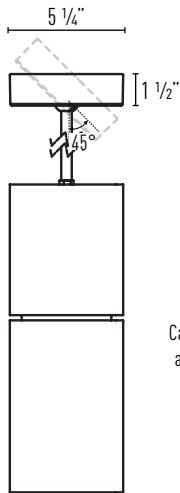


Canopy can be mounted at a maximum angle of 45°

Remote Driver Enclosure

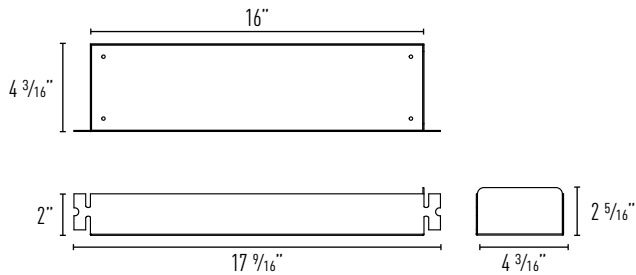

Emergency Backup

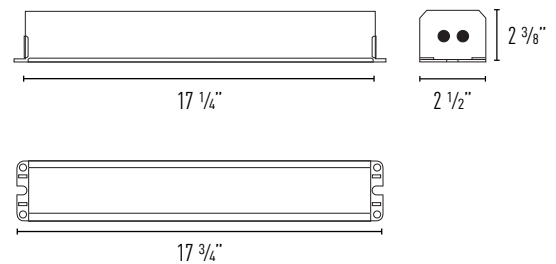

JOB NAME		CATALOG NUMBER	
NOTES		TYPE	


GC4DRREML130 HZ

Report #: ILL20181221-2.001
 ILL20181212-2.001
 ILL20181212-5.001
 ILL20181212-8.002
 ILL20181212-11.001

CCT MULTIPLIERS:

	82 CRI	92 CRI
2700K	(x 0.95)	(x 0.79)
3000K	(x 1.00)	(x 0.82)
3500K	(x 1.02)	(x 0.85)
4000K	(x 1.03)	(x 0.88)


-NS (14° Narrow Spot)



Watts: 10 LPW: 83.4
 Lumens: 834 CCT: 3000K

Luminance	
Degree	CBCP
0°	6635
5°	4992
15°	770
25°	394
35°	40
45°	20


-SP (20° Spot)



Watts: 10 LPW: 88.4
 Lumens: 884 CCT: 3000K

Luminance	
Degree	CBCP
0°	3461
5°	3073
15°	1156
25°	454
35°	70
45°	30


-NF (30° Narrow Flood)



Watts: 10 LPW: 87.9
 Lumens: 879 CCT: 3000K

Luminance	
Degree	CBCP
0°	2128
5°	1984
15°	1227
25°	552
35°	102
45°	33


-FL (40° Flood)



Watts: 10 LPW: 78.4
 Lumens: 784 CCT: 3000K

Luminance	
Degree	CBCP
0°	1328
5°	1269
15°	923
25°	488
35°	172
45°	62

-WF (50° Wide Flood)



Watts: 10 LPW: 78.9
 Lumens: 789 CCT: 3000K

Luminance	
Degree	CBCP
0°	1097
5°	1069
15°	869
25°	516
35°	201
45°	71


GC4DRREML230 HZ

Report #: ILL20181221-2.002
 ILL20181212-2.002
 ILL20181212-5.002
 ILL20181212-8.002
 ILL20181212-11.002

CCT MULTIPLIERS:

	82 CRI	92 CRI
2700K	(x 0.95)	(x 0.79)
3000K	(x 1.00)	(x 0.82)
3500K	(x 1.02)	(x 0.85)
4000K	(x 1.03)	(x 0.88)


-NS (14° Narrow Spot)



Watts: 14 LPW: 95
 Lumens: 1330 CCT: 3000K

Luminance	
Degree	CBCP
0°	10579
5°	7960
15°	1228
25°	629
35°	63
45°	31


-SP (20° Spot)



Watts: 14 LPW: 100.7
 Lumens: 1410 CCT: 3000K

Luminance	
Degree	CBCP
0°	5518
5°	4901
15°	1843
25°	724
35°	111
45°	47


-NF (30° Narrow Flood)



Watts: 14 LPW: 100.7
 Lumens: 1402 CCT: 3000K

Luminance	
Degree	CBCP
0°	3394
5°	3163
15°	1956
25°	881
35°	163
45°	53


-FL (40° Flood)



Watts: 14 LPW: 89.3
 Lumens: 1250 CCT: 3000K

Luminance	
Degree	CBCP
0°	2117
5°	2024
15°	1472
25°	779
35°	274
45°	100

-WF (50° Wide Flood)



Watts: 14 LPW: 89.8
 Lumens: 1258 CCT: 3000K

Luminance	
Degree	CBCP
0°	1749
5°	1705
15°	1386
25°	822
35°	320
45°	113

JOB NAME		CATALOG NUMBER	
NOTES		TYPE	


GC4DRREML330 HZ

Report #: ILL20181221-2.003
 ILL20181212-2.003
 ILL20181212-5.003
 ILL20181212-8.003
 ILL20181212-11.003

CCT MULTIPLIERS:

	82 CRI	92 CRI
2700K	(x 0.95)	(x 0.79)
3000K	(x 1.00)	(x 0.82)
3500K	(x 1.02)	(x 0.85)
4000K	(x 1.03)	(x 0.88)


-NS (14° Narrow Spot)



Watts: 19 LPW: 93.7
 Lumens: 1780 CCT: 3000K

Luminance	
Degree	CBCP
0°	14166
5°	10658
15°	1644
25°	842
35°	85
45°	42


-SP (20° Spot)



Watts: 19 LPW: 99.3
 Lumens: 1888 CCT: 3000K

Luminance	
Degree	CBCP
0°	7389
5°	6562
15°	2468
25°	969
35°	149
45°	63


-NF (30° Narrow Flood)



Watts: 19 LPW: 98.8
 Lumens: 1877 CCT: 3000K

Luminance	
Degree	CBCP
0°	4545
5°	4236
15°	2619
25°	1179
35°	219
45°	71


-FL (40° Flood)



Watts: 19 LPW: 88.1
 Lumens: 1673 CCT: 3000K

Luminance	
Degree	CBCP
0°	2835
5°	2710
15°	1970
25°	1042
35°	367
45°	133

-WF (50° Wide Flood)



Watts: 19 LPW: 88.6
 Lumens: 1684 CCT: 3000K

Luminance	
Degree	CBCP
0°	2341
5°	2282
15°	1855
25°	1101
35°	428
45°	151


GC4DRREML430 HZ

Report #: ILL20181221-2.004
 ILL20181212-2.004
 ILL20181212-5.004
 ILL20181212-8.004
 ILL20181213-11.004

CCT MULTIPLIERS:

	82 CRI	92 CRI
2700K	(x 0.95)	(x 0.79)
3000K	(x 1.00)	(x 0.82)
3500K	(x 1.02)	(x 0.85)
4000K	(x 1.03)	(x 0.88)


-NS (14° Narrow Spot)



Watts: 24 LPW: 92
 Lumens: 2208 CCT: 3000K

Luminance	
Degree	CBCP
0°	17573
5°	13221
15°	2039
25°	1044
35°	105
45°	52


-SP (20° Spot)



Watts: 24 LPW: 97.6
 Lumens: 2342 CCT: 3000K

Luminance	
Degree	CBCP
0°	9166
5°	8140
15°	3062
25°	1202
35°	185
45°	78


-NF (30° Narrow Flood)



Watts: 24 LPW: 97
 Lumens: 2328 CCT: 3000K

Luminance	
Degree	CBCP
0°	5638
5°	5255
15°	3249
25°	1463
35°	271
45°	88


-FL (40° Flood)



Watts: 24 LPW: 86.5
 Lumens: 2076 CCT: 3000K

Luminance	
Degree	CBCP
0°	3517
5°	3362
15°	2444
25°	1293
35°	455
45°	165

-WF (50° Wide Flood)



Watts: 24 LPW: 87
 Lumens: 2089 CCT: 3000K

Luminance	
Degree	CBCP
0°	2905
5°	2831
15°	2302
25°	1365
35°	531
45°	187