CAPRI BFP LED 24"

Architectural Indoor

•	4 R	
/Eq.	ЮH	LED
the second	10.11	

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	




FEATURES

- ADA Compliant
- CSA Listed Damp Location For Wall or Ceiling Mounting
- L31.6 is Dimmable at 120V and 277V
- LED Light Fixture
- · Luminous White Acrylic Diffuser
- Mounts Directly to Surface w/ Four Wall Anchors (Not Included)
- Steel Housing w/ Matte Silver Powder Coat Finish
- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- 80 CRI Standard. 90 CRI Optional.



LINE DRAWING

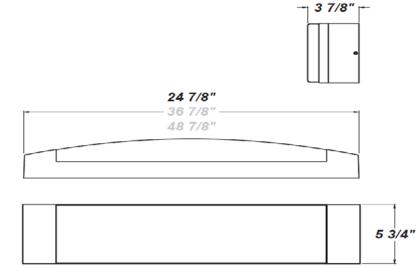

















TERONLIGHTING.COM



Textured White









CAPRI BFP LED 24"

Architectural Indoor



PO#:			
COM	M	ΕN	TS:

QTY:

PROJECT: TYPE:

Fixture Core

PRODUCT CODE SOURCE/WATTAGE		VOLTAGE	DIMMING DRIVER	
CPRB24 - Capri BFP LED 24"	L31.6-ZE1100 - 31.6W @ 1100mA 0-10V Dimming Driver	120V 277V	0-10V Dimming	
ORDER INFO				
CPRB24	L31.6-ZE1100	120V	Not Applicable	
Example ^				

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver (Standard) SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	TP - Tamper Resistant Screws 90 CRI (Color Rendering Index)
Not Applicable	AC	30K	TP

PROD	SOURCE	30K SPECS		
PROD CPRB 24"	L31.6	30K SPECS 30K - 3000K Color Temp 4376 LED Source Lumens 138.5 LED Source Lumens Per Watt		

REPLACEMENT PART	PART NO	NOTES
White 2' Acrylic Diffuser	3039860	
		Don't see the configuration you are looking for? Call us today at (513) 858-6004

