

CAPRI BFP LED 36"


Architectural Indoor



PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	


FEATURES

- ADA Compliant
- CSA Listed Damp Location For Wall or Ceiling Mounting
- L31.1 is Dimmable at 120V and 277V
- L33.7 is Dimmable at 120V
- LED Light Fixture
- Luminous White Acrylic Diffuser
- Mounts Directly to Surface w/ Four Wall Anchors (Not Included)
- Steel Housing w/ Matte Silver Powder Coat Finish
- Steel Mounting Pan w/ Hi-Reflectance White Powder Coat Finish
- 80 CRI Standard. 90 CRI Optional.

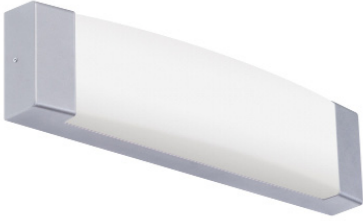


LINE DRAWING

LINE DRAWING NOT TO SCALE

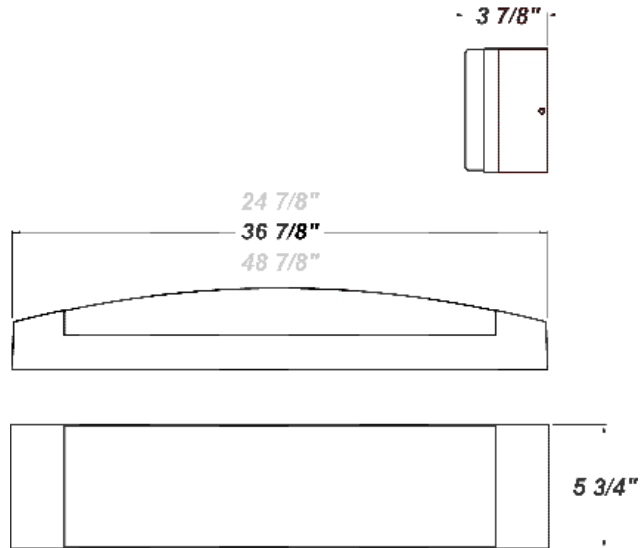


FINISHES


Antique Copper




Antique Silver




Bronze Mist




Matte Silver




Sand




Swedish Steel




Textured Black



Textured Bronze



Textured White



For RAL Colors & Custom Match - Contact Teron Lighting Inc.

CAPRI BFP LED 36"

Architectural Indoor



Fixture Core

PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
CPRB36 - Capri BFP LED 36"	L31.1-ZE1100 - 31.1W @ 1100mA 0-10V Dimming Driver L33.7-LT1200 - 33.7W @ 1200mA Leading and Trailing Edge Dimming Driver	120V 277V	0-10V Dimming Leading & Trailing Edge Dimming
ORDER INFO			
CPRB36 Example ^	L31.1-ZE1100	120V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable	AC - Antique Copper TB - Textured Black AS - Antique Silver BT - Bronze Mist BZ - Textured Bronze SM - Matte Silver (Standard) TW - Textured White SN - Sand SW - Swedish Steel	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	TP - Tamper Resistant Screws 90 CRI (Color Rendering Index)
ORDER INFO			
Not Applicable Example ^	AC	30K	TP

PROD	SOURCE	30K SPECS			
CPRB 36"	L31.1	<ul style="list-style-type: none"> 30K - 3000K Color Temp 4377 LED Source Lumens 140.7 LED Source Lumens Per Watt 			
	L33.7	<ul style="list-style-type: none"> 30K - 3000K Color Temp 4774 LED Source Lumens 141.6 LED Source Lumens Per Watt 			

REPLACEMENT PART	PART NO	NOTES
White 3' Acrylic Diffuser	3054360	
		Don't see the configuration you are looking for? Call us today at (513) 858-6004



TERONLIGHTING.COM
 33 DONALD DR, FAIRFIELD, OH 45014
 P: 513.858.6004 F: 513.858.6038
 E: SALES@TERONLIGHT.COM



We reserve the right to revise the design components of any product due to parts availability or change in UL standards, without assuming any obligation or liability to modify any products previously manufactured, and without notice.