LANDMARK M LED

Architectural Indoor

رگے	(I)	LED	1


PROJECT:	
TYPE:	
PO#:	QTY:
COMMENTS:	

FEATURES

- ADA Compliant
- Aluminum Mounting Pan & Reflector
- CSA Listed Dry Location For Wall Mounting
- LED Light Fixture
- Luminous White Acrylic Diffuser
- Mounting Hardware Included
- Mounts Directly to 4" Junction Box (By Others)
- · Open Top & Bottom
- Steel Trim Accents w/ Matte Silver Powder Coat Finish




LINE DRAWING

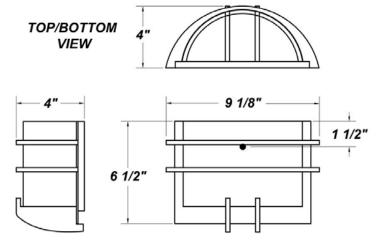









Antique

Silver

Bronze Mist



Textured White



Sand



For RAL Colors & Custom Match -**Contact Teron** Lighting Inc.







E: SALES@TERONLIGHT.COM



LANDMARK M LED

Architectural Indoor



I	PROJECT:	
I	TYPE:	
I	PO#:	QTY:
I	COMMENTS:	

F	i	Х	t	u	r	е	1	C	0	r	e

PRODUCT CODE	SOURCE/WATTAGE	VOLTAGE	DIMMING DRIVER
LNDM - Landmark M L11.5-350mA - 11.5W @350mA Constant Current		120V - 120V 277V - 277V (50 / 60Hz)	Not Applicable
ORDER INFO			
LNDM Example ^	L11.5-350mA	120V - 120V	Not Applicable

Aesthetics & Options

TRIM	FINISH	COLOR TEMP	OPTIONS
Not Applicable ORDER INFO	AC - Antique Copper AS - Antique Silver BT - Bronze Mist SM - Matte Silver (Standard) SN - Sand SW - Swedish Steel TB - Textured Black BZ - Textured Bronze TW - Textured White	30K - 3000K Color Temp 35K - 3500K Color Temp 40K - 4000K Color Temp 50K - 5000K Color Temp	Not Applicable
	SM	30K	Not Applicable

Example ^

PROD	SOURCE	30K SPECS		
PROD LNDM	L11.5	80 CRI Typ. 1740 LED Source Lumens 151.3 LED Source Lumens Per Watt		

REPLACEMENT PART	PART NO	NOTES
White Acrylic Diffuser	3033660	Don't see the configuration you are looking for?
		Call us today at (513) 858-6004

